

Eastside Type N Riparian Effectiveness Study Design

Eastside Type N Riparian Effectiveness Project (ENREP) Technical Writing and Implementation Group (TWIG)



Cooperative Monitoring
Evaluation & Research

CMER 2018.03.27

This Page intentionally left blank

**Washington State
Cooperative Monitoring, Evaluation, and Research Committee (CMER) Document**

Eastside Type N Riparian Effectiveness Study Design

**Prepared by
Eastside Type N Riparian Effectiveness Project (ENREP) Technical Writing and
Implementation Group (TWIG)**

**Project Manager
Howard Haemmerle**

**Prepared for the
Scientific Advisory Group – Eastside (SAGE)
of the
Cooperative Monitoring, Evaluation, and Research Committee (CMER)
of the**

**Washington State Forest Practices Board
Adaptive Management Program
Washington State Department of Natural Resources
Olympia, Washington**

CMER 2018.03.27

Washington State Forest Practices Adaptive Management Program

The Washington Forest Practices Board (FPB) has adopted an adaptive management program in concurrence with the Forests and Fish Report (FFR) and subsequent legislation. The purpose of this program is to:

Provide science-based recommendations and technical information to assist the board in determining if and when it is necessary or advisable to adjust rules and guidance for aquatic resources to achieve resource goals and objectives. (Forest Practices Rules, WAC 222-12-045)

To provide the science needed to support adaptive management, the FPB made the Cooperative Monitoring, Evaluation and Research Committee (CMER) a participant in the program. The FPB empowered CMER to conduct research, effectiveness monitoring, and validation monitoring in accordance with guidelines recommended in the FFR.

Document Type and Disclaimer

This study design was prepared for the Cooperative Monitoring, Evaluation and Research Committee (CMER) to support design and implementation of Forest and Fish Adaptive Management research and monitoring studies. The project is part of the Type N Riparian Effectiveness Program and was conducted under the oversight of the Scientific Advisory Group – Eastside (SAGE).

This study design was reviewed and approved by CMER and was reviewed and approved through the Adaptive Management Program’s independent scientific peer review process (ISPR)ⁱ. As a CMER document, CMER is in consensus on the scientific merit, conclusions, and interpretations of the document. Recommendations contained within this document are those of the authors and may not reflect the views of any or all CMER members.

The Forest Practices Board, CMER, and all the participants in the Forest Practices Adaptive Management Program hereby expressly disclaim all warranties of accuracy or fitness for any use of this document other than for the Adaptive Management Program. Reliance on the contents of this document by any persons or entities outside of the Adaptive Management Program established by WAC 222-12-045 is solely at the risk of the user.

Proprietary Statement

This work was developed with public funding, as such it is within the public use domain. However, the concept of this work originated with the Washington State Forest Practices Adaptive Management Program and the authors. As a public resource document, this work should be given proper attribution and be properly cited.

ⁱ a process used to “determine if the scientific studies that address program issues are scientifically sound and technically reliable; and provide advice on the scientific basis or reliability of CMER’s reports” (Board Manual Section 22.4.1).

Full Reference

Eastside Type N Riparian Effectiveness Project (ENREP) Technical Writing and Implementation Group (TWIG). 2018. Eastside Type N Riparian Effectiveness Study Design. Cooperative Monitoring Evaluation and Research. CMER 03-27-2018. Washington Department of Natural Resources, Olympia, WA.

Eastside Type N Riparian Effectiveness Study Design

Final Revised Draft
3/25/2018

Table of Contents

- Table of Contents 1
- Abstract 2
- Context and History 3
- Background 6
 - Discharge 6
 - Thermal Processes 7
 - Wood and Sediment 11
 - Benthic Invertebrates and other aquatic life in Headwater Streams 12
- Project Description..... 14
 - Purpose..... 14
 - Objective 14
 - Critical Questions..... 14
 - Research Approach 14
- Research Questions 22
- Analytical Framework 25
 - Sampling scheme and field measurements 25
 - Analytical methods 34
- References 41

Abstract

In 2001 the Washington State Forest Practice Board approved a comprehensive set of new forest practice rules (WDNR, 2001) based on the *Forests & Fish Report* (WDNR, 1999). One of the goals of these rules is to protect water quality, including aquatic life,¹ in streams on non-federal forest lands in Washington State. To this end, the Cooperative Monitoring Evaluation and Research (CMER) committee has been tasked with performing research in support of an Adaptive Management Program (AMP). This research includes the study described herein to evaluate the effectiveness of the eastern Washington Type N riparian management rules (WAC 222-30-022).

This study addresses three questions related to the effects of timber harvest along non-fish-bearing (Type N) streams in eastern Washington:

1. What is the magnitude of change in water temperature, canopy closure, and stream cover of Type N channels in the first two years after harvest?
2. What is the magnitude of change in stream flow and suspended sediment export from the Type N basins in the first two years after harvest?
3. What is the relationship between observed changes in resource condition and forest management activity?

The study, intended to be a companion to Type N studies in western Washington, is focused on water quality. The design allows for additional questions to be addressed where doing so will provide scientifically defensible information relevant to adaptive management, and does not jeopardize our ability to satisfactorily address the original questions as was done in both westside Type N studies.

As with the westside Type N studies, this study incorporates a Multiple, Before-After/Control-Impact (MBACI) experimental design. Spatially blocked sets of treatment and reference sites will be identified and data collection will be conducted for at least two years pre-harvest and two years post-harvest, with a one-year harvest window. Longer-term monitoring will be required to determine the overall trajectory of the response and to capture a broader range of climate conditions and greater potential for episodic changes.

Small sample size, relative to observational studies, is an issue for most experimental studies and especially so for field-based studies like this. However, experimental studies are essential to testing the effectiveness of specific riparian prescriptions. Given our limited amount of basin-scale replication, the results of this study should not be viewed solely in isolation, but rather as a part of the larger body of research on forestry effects.

¹ It is required that all indigenous fish and nonfish aquatic species be protected in waters of the state (WAC 173-201A-200(1)).

Context and History

The Washington State Legislature and the Washington Forest Practices Board (WFPB) have adopted forest practices rules designed to maintain and restore salmonid populations and meet the requirements of the federal Clean Water Act. They also set up a formal science-based Adaptive Management Program (AMP) to provide science-based recommendations and technical information to assist the WFPB in determining when it is necessary or advisable to adjust rules and guidance to achieve resource objectives (WAC 222-12-045). The resource objectives are intended to ensure that forest practices, either individually or cumulatively, will not significantly impair the capacity of aquatic habitat to: a) support harvestable levels of salmonids; b) support the long-term viability of other covered species; or c) meet or exceed water quality standards (WAC 222-12-045(2)(a)) (Table 1).

The WFPB has empowered the Cooperative Monitoring Evaluation and Research committee (CMER) and the TFW Policy committee (Policy) to participate in the AMP (WAC 222-12-045(2)(b)). CMER has been tasked with completing a programmatic series of work tasks in support of the AMP; these tasks are laid out in an annual work plan that is approved by Policy. The Type N (non-fish-bearing) Riparian Effectiveness Program has been given a high research priority because of the many gaps in the scientific understanding of headwater streams, their aquatic resources, and the response of riparian stands, amphibians, water quality, and downstream fish populations to different riparian management strategies (CMER 2014). To date, no CMER studies have been conducted to determine whether the eastern Washington Type N riparian prescriptions described in WAC 222-30-022(2) are effective in meeting the resource objectives.

This study is part of the formal AMP for the Washington Forest Practices Habitat Conservation Plan (HCP) and the state forest practices rules and is one component in the Type N Riparian Effectiveness Program in the 2015 CMER work plan (CMER, 2014). The study was listed as a priority project in the 2012 Forest Practices Habitat Conservation Plan (FPHCP) Settlement Agreement between conservation community, the timber industry, and Washington State regarding Clean Water Act assurances. As an effectiveness monitoring project, the Eastside Type N Riparian Effectiveness Project (ENREP) is intended to determine whether “the rules produce forest conditions and processes that achieve resource objectives” and “whether less costly alternative prescriptions would be effective in producing conditions and processes that meet resource objectives or where more conservative prescriptions may be necessary”.²

In 2013 a Technical Writing and Implementation Group (TWIG) was appointed to develop ENREP objectives, critical questions and study design options. In June of 2013 Policy approved the objectives and critical questions while asking the TWIG to consider additional issues including the effects of harvesting along seasonally dry stream reaches. The TWIG evaluated research alternatives and proposed a preliminary research effort (the “Forest Hydrology Study (FHS) Extension”) to examine the spatial and temporal consistency of channel wetting and drying in a set of Type Np (N-perennial) basins known to include both perennial and seasonally-

² [Forest Practices HCP Appendix N - Schedule L-1 Key Questions, Resource Objectives, and Performance Targets for Adaptive Management](http://www.dnr.wa.gov/programs-and-services/forest-practices/forest-practices-habitat-conservation-plan). <http://www.dnr.wa.gov/programs-and-services/forest-practices/forest-practices-habitat-conservation-plan>. December 2005.

dry reaches along Np channels. In the regulatory context, a Type Np channel can contain seasonally-dry reaches as long as there is upstream perennial flow connected to fish-bearing waters through a continuous channel. In the absence of connected upstream perennial flow, a seasonally dry reach is classified as Ns. A basin containing an Np channel is a Type Np basin. The ENREP research alternatives document was approved by Policy in November 2013.

Over the summer of 2014, the TWIG supervised data collection under the FHS Extension. In the original FHS survey, 21% of the Type Np channel network was dry by late summer. The FHS Extension focused on a subset of these same basins that were known to have seasonally dry reaches along Np channels. The FHS Extension showed that by later summer 35% of the total Np channel length was dry in this subset of Np channels with dry reaches. Approximately one-third of this was dry over the course of the entire summer while the remaining two-thirds dried incrementally. Additionally, the Extension showed that there was general consistency in the location of drying from year to year. The TWIG concluded that ENREP could feasibly include harvest treatments that targeted seasonally dry reaches. Policy was informed of the FHS Extension results in February 2015 and directed the TWIG to develop an ENREP study design.

In July 2015 the TWIG presented a draft study design to CMER that included a treatment focused on harvesting dry reaches in accordance with current FFR rule. That design met with resistance within CMER, and in August 2015 Policy retracted their previous guidance and directed the TWIG to develop treatments based on a structure recognized as best available science (BAS). In 2016, it was determined that the study would have two study components; one focused on perennially wet Np channels and one focused on seasonally wet Np channels.

In 2016, a study design for the perennial component of the project was completed and submitted for ISPR review. Shortly thereafter, in 2017, a TWIG was also convened for the dry component. In response to ISPR comments, and in response to dry TWIG concerns, field reconnaissance was conducted in summer 2017 to locate potential study basins in the Northern Rockies ecoregion. Three study basins were located across the region's precipitation gradient that show varying spatial and temporal extents of wet and dry reaches within each basin.

Given the comprehensive nature of ISPR comments about the scope of inference for the study, the inherent mix of wet and dry reaches that occurs in most Northern Rockies basins, and the experimental necessity and practical efficiencies of addressing wet and dry reaches simultaneously, the wet and dry TWIGs forwarded a recommendation to CMER to once again combine the two studies. This study plan now addresses a combined study.

This study will use BAS to address the question of whether riparian processes and functions provided by Type Np buffers are maintained at levels that meet FPHCP resource objectives. The FPHCP resource objectives listed in Schedule L-1 which are relevant to this study are listed in Table 1.

Table 1: FPHCP Schedule L-1 Resource Objectives.

Condition or process	Functional objective	Performance Target
Stream temperature	Provide cool water by maintaining shade, groundwater temperature, flow, and other watershed processes controlling stream temperature. ³	Water quality standards (— current and anticipated in next triennial review)
Shade	Same as above.	Eastside high elevation: Shade available within 50 feet for 50% of stream length
LWD	Develop riparian conditions that provide complex habitats for recruiting large woody debris and litter. ⁴	
Litterfall	Same as above.	Eastside Type N: at least 70% of recruitment available from within 50'.
Sediment	Provide clean water and substrate and maintain channel forming processes by minimizing to the maximum extent practicable, the delivery of management induced coarse and fine sediment to streams by protecting stream bank integrity, providing vegetative filtering, protecting unstable slopes, and preventing the routing of sediment to streams.	
Hydrology	Maintain surface and groundwater hydrologic regimes (magnitude, frequency, timing, and routing of stream flows) by disconnecting road drainage from the stream network, preventing increases in peak flows causing scour, and maintaining the hydrologic continuity of wetlands.	

³ Stream temperature is affected by the interaction of a complex set of factors, including shade, air temperature, pool depth and frequency, flow, and groundwater influences. These factors are addressed in resource objectives for other conditions or processes (e.g., hydrology, sediment, LWD) in addition to the targets selected for stream temperature.

⁴ Litter is defined to include leaves, needles, twigs, branches, and other organic debris that is recruited to aquatic systems and riparian forest floor.

Background

Discharge

Forest management can affect headwater stream hydrology (Moore and Wondzell 2005). The removal of forest canopy reduces evaporation from canopy interception and transpiration which changes the magnitude and timing of water delivery to the soil, soil moisture (Lewis *et al.* 2001; Keim and Skaugset 2003; Johnson *et al.* 2007) and snowmelt dynamics (Jones and Post, 2004; Marks *et al.*, 1998). At the same time, forest roads can extend the surface channel network and intercept subsurface flow thereby increasing the surface water volume and the speed at which it enters the channel (Wemple *et al.* 1996; Wemple and Jones 2003).

Watershed studies from the Pacific Northwest and elsewhere have generally revealed that annual water yields increase in the short term then gradually decline following recovery from timber harvest, though the magnitude and timing of change is affected by a large number of factors (Bosch and Hewlett 1982; Stednick 1996; Jones and Post 2004; Brown *et al.* 2005; Moore and Wondzell 2005). In the Pacific Northwest, basins with 80% clearcut harvest have been shown to yield 483-615 mm more water per year in the Oregon Coast Range (Harr *et al.* 1975; Harris 1977; Harr 1983), 290-410 mm in the Oregon Cascades (Harr *et al.* 1979; Harr *et al.* 1982; Harr 1983, Harr 1986), and 360 mm on Vancouver Island (Heatherington 1982). Paired watershed studies have reported absolute daily streamflow changes of -2 to 8 mm/day following 100% forest removal with strong seasonal variations in the response including reductions in summer base flow (Hicks *et al.* 1991; Jones and Post, 2004). It is generally accepted that in rain-dominated areas, measurable annual runoff can increase by as much as 6 mm per year for each percent of the basin harvested above some threshold (Moore and Wondzell 2005). Following these initial flow increases immediately after harvest, decreased runoff below baseline values has been both observed and simulated with physically-based models decades after harvest due the recovery of vigorous young vegetation with higher evapotranspiration rates (Perry and Jones 2016; Du *et al.* 2016). These flow declines have also been noted to occur during dry summer low discharge conditions, both due to changes in riparian forest conditions (Hicks *et al.*, 1991) and development of upslope forest plantations with the ability to transpire more water than older forests, resulting in decreased discharges for 10 to 50 or more years following harvest (Perry and Jones 2016). Flow alterations resulting from harvest may affect stream temperature dynamics by increasing or decreasing the potential of streams to buffer increased heat fluxes, especially during the period of maximum temperatures when discharges are low.

In contrast to rain-dominated or rain-on-snow-dominated systems, eastern Washington tends to be dominated by snow-with-rain or snowmelt systems (Reidy Liermann *et al.* 2012). Forest cover has a large effect on snow accumulation and melt dynamics. Snow accumulation in clearcuts is much larger than in intact forests due to reduced canopy snow interception losses from sublimation and evaporation, and increased turbulence over forest gaps. Melting is faster in clearcuts because snow is exposed to more shortwave radiation and turbulent (sensible and latent) energy transfer relative to snowcovers beneath forest canopies (Marks *et al.*, 1998), although snowfall magnitude, aspect, elevation, slope, windspeed, and clearcut size all affect the magnitude and timing of change (Berris and Harr 1987; Storck *et al.*, 2002; Varhola *et al.* 2010; Ellis *et al.* 2013). In snowmelt systems, water yields also increase following harvest, but the

timing of hydrologic change is different. For example, a paired watershed study in the Mica Creek Experimental Watershed in northern Idaho determined that a 50% clearcut and a 50% partial cut increased yield by more than 270 mm and 140 mm per year, respectively; the largest increases came during the snow melt season in late spring (Hubbart *et al.* 2007). In rain-dominated systems, the relative effect of harvest typically decreases with event magnitude; but in snowmelt-dominated systems, peak flows are likely to increase in both frequency and magnitude (Green and Alila, 2012; Kuras *et al.* 2012) which may in turn influence channel disturbance and sediment transport dynamics, and hence alter interactions between flows, channel substrate, and energy fluxes that control temperature dynamics, especially during low flow conditions.

Thermal Processes

Summer stream temperatures vary both within stream reaches and across the landscape due to variation in physical, hydrologic, and climatic conditions that drive thermal processes (Poole and Berman, 2001; Johnson, 2004). Stream temperatures also vary as a result of differences in past riparian management practices and disturbance (Brown and Krygier, 1970; Brosofske *et al.* 1997; Wilkerson *et al.* 2006; Dent *et al.* 2008; Pollock *et al.* 2009; Kibler *et al.* 2013). For example, although stream heating is commonly associated with increased shortwave radiation loading due to decreased shade (Moore *et al.* 2005a), increased flows as noted above may serve to buffer temperature increases from increased energy gains. Increased peak flows, sedimentation, and/or wood recruitment following harvest may alter shading from riparian vegetation or large wood, channel dimensions, and/or hyporheic flow and storage which can all affect the degree stream heating. Stream heating is further complicated in small, spatially intermittent channels because hyporheic flow and understory shading can more readily influence stream temperature. Much of the scientific uncertainty in the effectiveness of riparian management practices is caused by the complexity of heating and cooling processes in streams as summarized above (Poole and Berman, 2001; Moore *et al.* 2005a).

In order to understand the components that drive stream temperature change, it is useful to consider a one-dimensional energy balance model for well mixed streams without inflows or outflows (per Caissie *et al.* 2007):

$$\frac{\partial T_w}{\partial t} + v \frac{\partial T_w}{\partial x} - \frac{1}{A} \frac{\partial}{\partial x} \left(A D_L \frac{\partial T_w}{\partial x} \right) = \frac{W}{\theta \rho A} H_n \quad (1)$$

where, T_w represents the water temperature, t is the time, v is the mean water velocity, x is the distance traveled, A is the cross-sectional area, W is the river width, D_L is the dispersion coefficient in the direction of flow, θ is the specific heat of water, ρ is the water density, H_n is the net heat flux, and ∂ preceding a parameter denotes its partial differential. For a given point in time, and excluding the effect of longitudinal dispersion, the equation can be simplified to:

$$\frac{dT_w}{dx} = \frac{1}{v} \frac{H_n}{\theta \rho D} \quad (2)$$

where D is depth and d preceding the parameter denotes its differential. The model indicates that as water travels through the reach its temperature changes as a function of H_n , which is the sum of the heat exchange processes including net shortwave radiation, net longwave radiation, sensible and latent heat exchange, and bed heat conduction (Johnson, 2004; Moore *et al.* 2005a). For a given net heat flux in equation 2, the change in water temperature is proportional to the surface residence time (x/v) and inversely proportional to water depth. This was observed by Hawkins and colleagues (1997) in the Sierra and Shasta-Trinity mountains.

Tributaries can also modulate stream temperatures. The effect of tributaries depends on the temperature difference between the inflow and receiving stream temperatures and on their relative contribution to discharge, which can be modeled according to a simple mixing equation (Moore *et al.* 2005a):

$$dT_w = \frac{Q_{trib}}{Q_{main}} (T_{trib} - T_{main}) \quad (3)$$

where, Q is discharge. This model can be extended to account for the effects of other discrete inflows (e.g., springs). When changes in flow are not discrete, the model becomes:

$$\frac{dT_w}{dx} = \frac{Q_{in}}{Q_{sw}} (T_{in} - T_{sw}) \quad (4)$$

where, Q_{in} / Q_{sw} is the functional relationship between the diffuse inflow and surface water flow along the reach, and T_{in} and T_{sw} are, respectively, the diffuse inflow and surface water flow temperatures. This equation can be used to model the effects of diffuse groundwater inputs and direct precipitation to the channel.

Hyporheic exchange occurs along a subsurface flow path where surface water mixes with subsurface water and then returns to the stream (Gooseff *et al.* 2003). Water in the hyporheic zone is sheltered from exchanges along the air-water interface so it directly affects the spatial/temporal distribution, rather than the magnitude, of stream heat energy, and is often viewed as an important temperature buffer (Poole and Berman, 2001). Hyporheic water temperature (T_{hyp}) can be modeled in terms of the residence time (Gooseff *et al.* 2003):

$$\frac{\partial T_{hyp}}{\partial t} = \int_0^t \frac{\partial T_w(t-\tau)}{\partial t} g^*(t) dt \quad (5)$$

where, τ is a lag time and $g^*(t)$ is a function of the distribution of exchange rates.

Thermal processes can be accounted for using an additive effects model (Moore *et al.* 2005a) in which the rate of change in water temperature over a reach length (x) is a function of the incoming water temperature, net energy exchange across the air-water surface, and change in temperature associated with inflows, including the desynchronizing effect of hyporheic exchange (Figure 1).

Riparian timber harvest can affect stream temperatures through alterations of shade, sediment and logging debris recruitment, hyporheic flow, and discharge. In forested environments with perennial streams, shade provided by riparian vegetation is commonly the single most important

variable influencing summer stream temperature (Brown, 1969; Johnson and Jones, 2000; Danehy *et al.* 2005; Groom *et al.* 2011) although channel morphology can exert a distinct influence, especially at small scales. Harvest of riparian trees can reduce canopy cover and shade, thereby increasing the amount of shortwave radiation reaching the stream (Brazier and Brown, 1973; Moore *et al.* 2005b). The retention of riparian forest buffers ameliorates some of the loss of shade from adjacent timber harvest, though effectiveness of the buffer varies with buffer width, tree height, and tree density (DeWalle, 2010). In very small headwater streams, recovery of low-stature herbaceous vegetation following complete harvest of the riparian zone has been noted to produce high shade levels in the years immediately following harvest (Klos and Link, 2018).

Harvest adjacent to the stream can result in delivery of logging debris to the channel which can provide short-term stream cover and temporarily offset some of the loss of forest canopy shade (Jackson *et al.* 2001). Logging debris also increases hyporheic exchange capacity through the creation of debris jams and channel steps (Wondzell, 2006), but can also increase retention time and hence the potential for heating. Changes in discharge can also affect temperature by diluting or concentrating the incoming heat load into a larger or smaller volume of water (Poole and Berman, 2001).

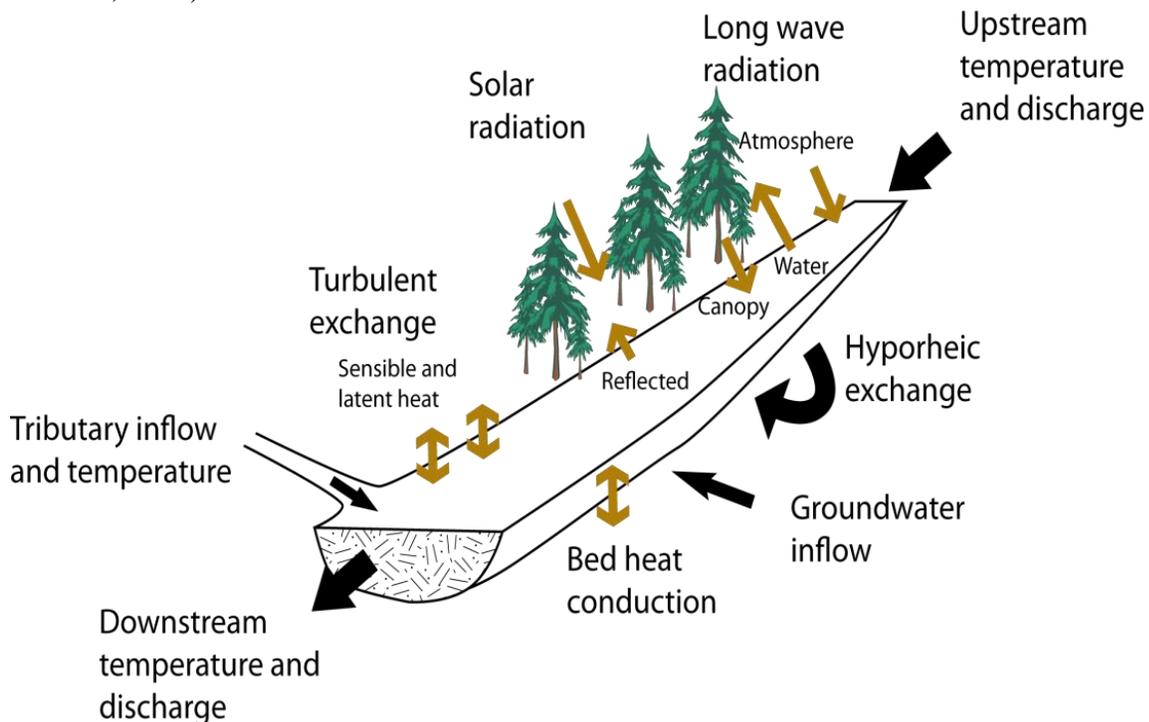


Figure 1: Conceptual model of stream heating and cooling processes (Moore *et al.* 2005a). Black arrows indicate energy fluxes associated with water exchanges.

Studies of the effects of various riparian buffer configurations on stream temperature on fish-bearing streams in the Pacific Northwest have reported increases of 2.5 to 5.0 °C following clearcut harvest (Moore *et al.* 2005a). A well-replicated study of small and medium-size streams (<283 L/s mean annual flow) reported responses ranging from -0.9 to 2.5 °C for two different

buffer strategies in the Oregon Coast Range that included 20 foot no-cut buffers with thinning out to 69 ft (Groom *et al.* 2011). The magnitude of change was most strongly correlated with stream shade levels, though temperature change did vary with reach length and gradient. In contrast, Janisch *et al.* (2012) reported temperature changes ranging from -0.1 to 3.6 °C with no correlation to stream shade in small, non-fish-bearing headwater streams in western Washington. Janisch and colleagues suggested that very small (watershed area ≤ 8.5 ha) headwater streams with spatially intermittent surface flow differ from larger streams with spatially continuous flow throughout the stream network because hyporheic flow and understory shading can more readily influence stream temperature response in the former. Similarly, Gravelle and Link (2007) reported stream temperature increases of up to 3.6 °C in clearcut perennial nonfish-bearing reaches, but increases of only 0.8 °C in a similar reach with ~ 125 meters of seasonally dry channel, and non-significant minor temperature decreases in downstream buffered fish-bearing streams. Gravelle and Link (2007) hypothesized that cooler than expected stream temperature in the downstream reaches may have been due to increased midsummer streamflows resulting from evapotranspiration declines following timber harvest. Thus, stream temperature response is not only affected by heat exchange across the air-water surface interface, but is also a function of channel configuration, and hydrologic and basin physical conditions (Johnson, 2004; Hannah *et al.* 2004; Gravelle and Link 2007; Subehi *et al.* 2009; Leach and Moore, 2010).

Preliminary results from the CMER Type N Experimental Buffer Treatment Study in Competent Lithologies (“Hard Rock study”) are largely consistent with previous research; even small (less than 10%) decreases in shade caused measurable increases in summer maximum stream temperature. Following harvest, shade decreased in all three buffer treatments with the greatest reduction in shade observed in the 0% treatment (no buffer) and the least in the 100% treatment (entire reach buffered). Increased maximum, minimum, and diel range of daily stream temperatures were observed at nearly all sites and the magnitude of temperature response was correlated with several metrics of post-harvest shade. Average changes in maximum stream temperature at the bottom of the study area in the first two years post-harvest were 0.9 and 0.6 °C in the 100%, 1.4 and 1.0 °C in the FP (50% of the reach length buffered), and 3.1 and 2.7 °C in the 0% treatment (i.e., no trees in the riparian management zone (RMZ)).

Although large (relative to surface flow) inputs of groundwater and hyporheic exchange can buffer the response of stream temperature to energy gains (Arrigoni *et al.*, 2008, Johnson and Jones 2000; Story *et al.* 2003; Wondzell 2006), subsurface flow through dry reaches was not observed to have a consistent effect on downstream water temperature in the Hard Rock study. Models accounting for the influence of solar radiation on water temperatures are similarly mixed in their representation of subsurface flow and energy transfer processes. Stonestrom and Constantz (2003) outline a generalized model for tracing the movement of groundwater near streams that is based on heat exchange at the groundwater-surface water interface. A major assumption underlying this model is that groundwater is unaffected by solar radiation. However, bed heat conduction (as shown in Moore *et al.* 2005a) may transfer energy to subsurface flow along dry reaches. Kurylyk *et al.* (2015) develop a system of equations for accounting for subsurface water warming resulting from surface perturbations such as timber harvesting. They demonstrated the theoretical sensitivity of relatively shallow groundwater less than 10 m below the surface to warming, and emphasize that groundwater warming is particularly important for very small streams where subsurface energy fluxes may comprise a large portion of the stream energy budget.

In summary, timber harvest can alter a complex variety of interrelated processes that affect stream temperature dynamics. Specifically, harvest can decrease stream shade that may increase water temperatures. However, increased flow due to dramatically decreased evapotranspiration following harvest may serve to buffer the effects of increased heat fluxes which may have a reverse effect after vegetation recovers, evapotranspiration increases, and flows decline below preharvest conditions. Harvest can also increase the potential for both increased sedimentation and peakflows which can either individually, or in tandem alter channel morphology, wood recruitment, and/or riparian vegetation. Altered channel conditions may also affect temperature dynamics by changing the amount of water surface exposed to shortwave radiation loading, hyporheic flow and residence times, and shading by nearby bank vegetation and large wood. To adequately understand how harvest affects stream temperature, this study must employ a design and methodology to quantify these complex and interrelated conditions that directly and indirectly control stream temperature.

Wood and Sediment

Wood and sediment are natural components of headwater streams and timber harvest can affect the recruitment, storage, and transport of both wood and sediment that can in turn affect hyporheic storage and flow dynamics.

Timber harvest can affect wood recruitment by changing the number of trees with recruitment potential (Beechie 1998) or the frequency of mortality-inducing events including windthrow (Grizzel and Wolff, 1998; Jackson *et al.* 2001). The functions provided by wood depend upon the characteristics of both the wood (e.g. size and position relative to the channel) and the channel (e.g. width, gradient and composition of bed material) (Bilby and Ward, 1989; Gomi *et al.* 2001, Maxa 2009). While large woody debris (LWD, greater than 10 cm diameter) is the focus of most studies, the functional role of small woody debris (SWD, 0 cm to 10 cm diameter) tends to be greater in headwater streams (Gomi *et al.* 2001, Maxa 2009).

Using forest fuel models for intermountain forests (Anderson 1982), SWD loads in eastside forests typically range from about 5 to 10 tons/acre and increase post-harvest from slash and windthrow. Comparable levels would be expected in streams on an aerial basis. SWD is more abundant in headwater channels, because stream power is typically too low to transport it (Bilby and Ward 1989, Maxa 2009). In these cases, SWD can be a major step-forming element (Jackson and Sturm, 2002). In contrast, many LWD pieces are suspended above small streams, delaying their impact on the channel. In the long term, however, small wood appears to be less persistent than large wood because of more rapid decay and susceptibility to downstream transport during extreme events (Wallace *et al.* 2000, Scherer 2008).

In small forested basins, most sediment is supplied to channels via mass wasting and bank erosion. In harvested basins, ditches, roads, and skid track surfaces can also become major contributors (Hassan *et al.* 2005).

Sediment routing through a basin is complex. Changes in bedforms, large wood, and other channel features alter hydraulic resistance, shear stress, and in-channel sediment storage

(Buffington and Montgomery, 1999; Jackson *et al.* 2001; Kaufmann *et al.* 2009). Therefore, changes in sediment input may not be synchronized with changes in sediment export. In a classic example, Roberts and Church (1986) found that logging increased streambank erosion and landsliding in several watersheds in the Queen Charlotte Islands. However, the bed sediment residence time also increased by as much as ten-fold because large quantities of sediment were stored in in-channel sediment wedges, thereby delaying routing of this sediment downstream.

In a review paper, Dunne and others (2001) noted that one of the main problems with measuring and predicting the influence in forest management on sediment transport is that the monitoring period is typically too short to sample the variability of natural and disturbed hydrologic regimes. Episodic sediment transport is driven by episodic climatic events, and the likelihood of a large event is low during a study period of only a few years. Episodic mass wasting can deliver large quantities of sediment to stream channels in a short period of time and can mask treatment effects. Grant and Wolff (1991) documented 30 years of suspended and bed load sediment mobility from three small basins with different road building and forest harvest treatments. They estimated that approximately 85% of the total 30-year load was transported in a single event in which a series of debris flows scoured the channel to bedrock. Furthermore, the maximum post-harvest decrease in hillslope stability is thought to be delayed for several years as root strength declines (Sidle and Ochiai, 2006). For these reasons, the hydrologic processes most relevant to this study are expected to be those associated with increased soil moisture and runoff resulting from decreased forest interception and evapotranspiration. These include erosion of stream beds and banks and potential increases in mass soil movements, surface erosion, and soil creep. Blow down of buffers and road-related erosion may also deliver sediment to streams, though increased short-term recruitment of woody debris may result in much of this material being stored in basin over the course of the study.

Benthic Invertebrates and Other Aquatic Life in Headwater Streams

Benthic invertebrates are a critical component of the food web in all stream ecosystems (Hawkins *et al.* 1982; Wallace *et al.* 1997; Meyer *et al.* 2007) and are potentially sensitive to several environmental alterations that can be caused by forest practices (Hawkins *et al.* 1982, 1983, 1997, 2000, 2015; Davies and Nelson 1994; Richardson and Danehy 2007). Alteration of the riparian corridor can influence the amount of light, terrestrial-derived litter, water, sediments, and nutrients reaching the channel (Hawkins *et al.* 1983; Gregory *et al.* 1991; Davies and Nelson 1994; Kiffney *et al.* 2003). Excessive nutrients and fine sediments, altered thermal regimes, and altered hydrologic regimes are among the most pervasive sources of impairment to both aquatic life and water quality in the United States (Paulsen *et al.* 2008; Konrad *et al.* 2008; Carlisle *et al.* 2013).

Previous studies regarding the effects of forest practices on invertebrates and other aquatic species have produced mixed results (e.g., Newbold *et al.* 1980; Hawkins *et al.* 1982, 1983, 2000; Carlson *et al.* 1990; Kiffney *et al.* 2003; Quinn *et al.* 2004; Hernandez *et al.* 2005; Reid *et al.* 2010). Inconclusive results can easily arise due to the inherently high sampling variability associated with physically heterogeneous stream beds (Morin 1985; Norris and Georges 1993). Headwater streams can be especially difficult to sample because traditional sampling devices are

too large and thus inefficient. However, choice of the specific response variable used as the ecological endpoint can also influence results. Many of the previous studies examining response of benthic invertebrates to forest practices used functional feeding groups or other coarse descriptors of invertebrate condition as response variables. But, functional feeding groups appear to be relatively insensitive to stream changes associated with forest practices and other human-caused disturbances. Functional feeding groups seldom discriminate between reference-quality and degraded streams and are thus not used as metrics in the indices that state and federal water quality agencies use for assessment purposes (e.g., Herbst and Silldorff 2006; Hering *et al.* 2006; Stoddard *et al.* 2008). Endpoints that assess biodiversity loss or changes in species composition tend to be more sensitive (Hawkins 2000, 2006). Moreover, analyses that test for the sensitivity of species to different types of stressors of concern (e.g., temperature, fine sediment, altered hydrology, altered food sources) can help identify which specific environmental alterations are most strongly affecting communities and are thus of greatest concern to managers (e.g., Huff *et al.* 2008; Relyea *et al.* 2012; Glendell *et al.* 2014; Murphey *et al.* 2015; Hubler *et al.* 2016; Turley *et al.* 2016).

Project Description

Purpose

The purpose of this project is to determine the extent to which the prescriptions found in the eastside Type N Riparian Prescriptions Rule Group are effectively achieving performance targets, particularly as they apply to sediment and stream temperature and their effects on aquatic life. As an effectiveness monitoring project, it is also expected to inform whether the current rule is effective in meeting these targets.

Objective

The objective is to inform Policy of the quantitative changes in FPHCP covered resources, water quality and aquatic life coincident with forest harvest activities in eastern Washington, and to determine if and how observed changes are related to activities associated with forest management.

Critical Questions

1. What is the magnitude of change in water temperature, canopy closure, and stream cover of Type Np channels in the first two years after harvest?
2. What is the magnitude of change in stream flow and suspended sediment export from the Type Np basin in the first two years after harvest?
3. What is the relationship between observed changes in resource condition and forest management activity?

Research Approach

This study will use a hierarchical design that incorporates a blocked Multiple Before-After/Control-Impact (MBACI) design with reaches nested within basins to quantify the magnitude of change that occurs as a result of harvest activity. The MBACI design, which is replicated in space and time, controls for natural variability throughout the pre- and post-treatment periods and allows us to estimate the likelihood that observed effects are related to anthropogenic activity (Underwood, 1994; Downes *et al.* 2002).

The study is designed with two-years of pre-treatment monitoring and at least two-years of post-treatment monitoring. Two-years is not enough time to capture the full range of effects, especially those that are likely to be episodic. Although the degree of inference will be limited by the relatively short pre and post-treatment phases, this has been shown to be adequate for quantifying the initial changes associated with harvest (e.g., McIntyre *et al.* 2017). Longer-term monitoring will be required to determine the overall trajectory of the response and to capture a broader range of climate conditions and greater potential for episodic changes with less frequent recurrence intervals.

The highest-level experimental unit is the Type Np basin. The Type Np basin is the drainage area above the uppermost point of fish habitat in a basin with perennial flow and it is an appropriate unit of study because the eastside Type N riparian prescriptions are designed to be applied over an entire basin with different requirements for different portions of the drainage network. By experimenting at the basin scale, we can examine reach-scale effects within the drainage basin, as well as cumulative exports to downstream fish-bearing waters. Type Np basins were used as the experimental units in two CMER Type N studies in western Washington (i.e., Type N Experimental Hard Rock and Soft Rock) and an eastside Type N basin-scale study should allow for direct comparison of study results.

The basin-scale treatment that will be applied represents the most common application of the Type Np rule for eastern Washington (WAC 222-30-022(2)). The rule allows for harvest to within 50 feet of the outer edge of the bankfull width of the Np stream and requires that equipment be limited from working in a 30-foot wide zone measured horizontally from the outer edge of bankfull width of a Np or Ns streams. If basal area requirements are met, it is permissible to harvest within the RMZ under a clearcut or partial cut strategy, though FPA surveys suggest that these RMZ harvest strategies are rarely used. As a result, the default application is a 50 foot buffer along 100% of the Type Np stream.

Under this treatment, the Np basin would be subject to harvest of as many trees as practical for efficient economic operations, and retaining trees as silviculturally necessary for successful regeneration, to within 50 feet from the bankfull edge of the stream on both sides. Such practices are representative of those commonly used in state and private timber management in the region, thus supporting a meaningful evaluation. In sites with seasonally dry Np reaches, some, but not all, of the RMZ associated with seasonally dry Np reaches will be harvested under the clearcut option or an alternative plan. Such practice follows the rules and practical and silvicultural considerations, and it is also representative of state and private timber management. When it occurs, it will allow us to evaluate the effectiveness of buffering or not buffering seasonally dry Np reaches.

Although harvest activities will be completed at the basin scale, monitoring will be conducted at the reach scale. Even under single a riparian prescription, implementation in the field will yield a range of shade loss across the landscape not only because of the practical and silvicultural considerations note above, but also because of the range of pre-harvest conditions (e.g., Groom *et al.* 2011, Ehinger 2015). We emphasize shade loss in the experimental layout because shade is a FPHCP resource that changes in direct response to forest practices, and change in shade is the primary driver of stream temperature change in response to forest practices. Because we will monitor at the reach-level, we will be able to consider reach-level covariates in our statistical analyses, evaluating the influence of several parameters on shade loss, not solely those expressed by basin-wide descriptors. A similar scope of analysis will be employed for the other response variables.

Shade is affected by buffer width, canopy density, and tree height, and can vary with species composition (Groom *et al.* 2011; Teply *et al.* 2014) and crown geometry (Seyednasrollah and Kumar, 2013). Even within a single prescription and forest type, differences in tree position, canopy, understory vegetation, and local topography will create differences in shade loss. Hemiview data collected in western Washington for the Type N Experimental Buffer Treatment

Project in Hard Rock Lithologies (Ehinger, 2015) showed that effective shade loss in a 50', no cut buffer averaged 14%, but at-a-station shade loss ranged from -0.1% to 52%.

Resilience of stands to management activities is heavily dependent on stocking (Teply *et al.* 2014). Where initial stocking is relatively high, for instance in moist, high elevation, mixed conifer stands, we expect a distribution shifted towards lower shade loss under management. Conversely, where initial stocking is relatively low, for instance in dry, low elevation ponderosa pine stands, we expect a distribution with greater riparian shade loss.

With only a single treatment, there will be no direct inference to alternative prescriptions. However, the results are expected to add to a growing body of literature from other locations and prescriptions and will fill a clear knowledge gap with respect to non-fish-bearing streams spanning a precipitation gradient in eastern Washington. From the information gained in this study, our understanding of process mechanisms, and the greater body of existing knowledge, we should be able to infer the likely direction and/or magnitude of change expected under other conditions, and to critically assess the results of this study in the context of similar paired-basin (e.g.: Mica Creek (Hubbart et al., 2007), Alesa (Bladon et al., 2016), Trask (Bywater-Reyes, 2017), and Hardrock studies) and reach-scale studies (e.g.: Idaho Stream Shade Rule study (Keefe et al., 2015) in the region.

Site Selection

The target population is forest land in eastern Washington that is likely to be harvested under WAC-222-30-022(2). This includes all state and private forest lands in eastern Washington that do not have their own habitat conservation plan. Approximately 44% of the target population area is in the Northern Rockies ecoregion, 22% is in the Eastern Cascades slopes and Foothills, 15% is in the North Cascades with the rest split among the remaining ecoregions. A review of Forest Practices Applications (FPA) from 1994 to October 2017 showed that most of the acreage harvested in eastern Washington over the period came from the Northern Rockies ecoregion (66%) followed by the Eastern Cascades Slopes and Foothills (14%, Figure 2).

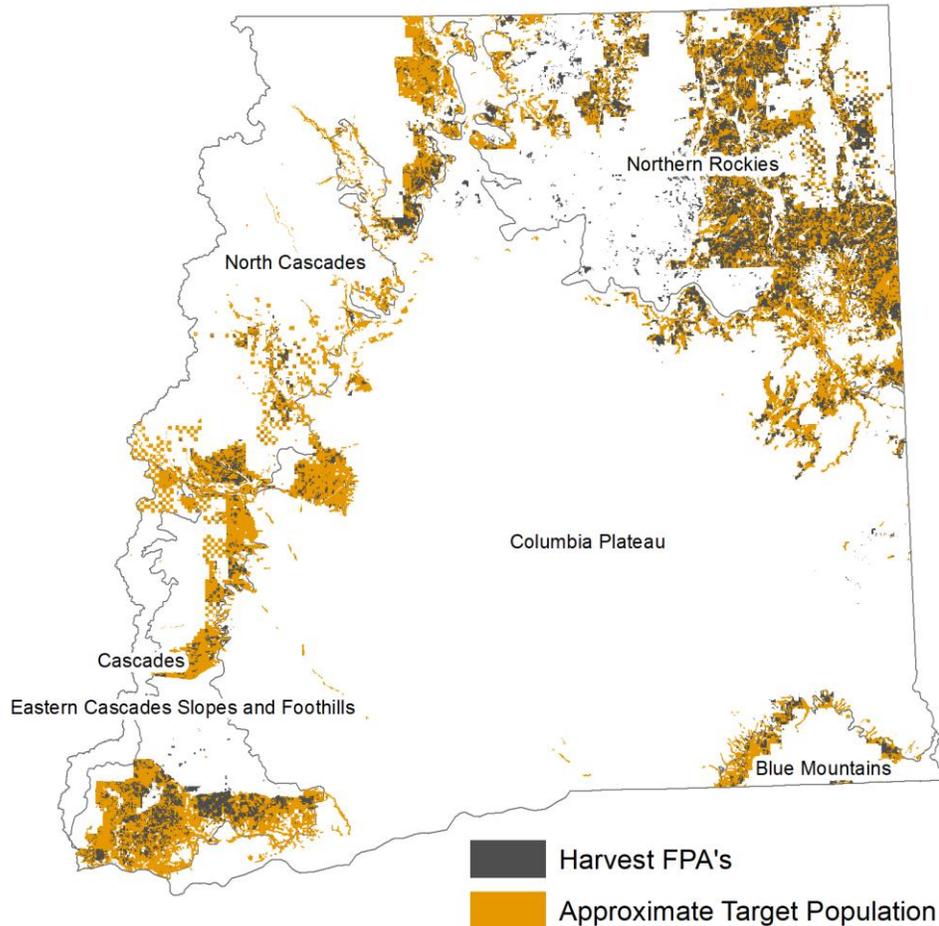


Figure 2: Approximate target population. The majority of Forest Practices Application (FPA's) of interest are in the Northern Rockies Ecoregion.

In the spring of 2017, land managers in the Northern Rockies ecoregion were contacted about the study. Using data regarding the extent of land managed for timber production by the state and large industrial landowners, approximately 77,000 acres of state and private land were office screened using aerial photographs and mapped Type N basins. The office screening identified 121 Type N basins that appeared to meet study criteria (i.e., entire Type N basin that appeared to be composed of mature harvestable timber). Site maps were sent to land managers with a question about whether the sites could be harvested in 2020 as part of this study. Private land managers identified 26 for possible inclusion.

Field reconnaissance of the 26 revealed three adjacent pairs (n=6) that met all study criteria. Approximately 1/3 of the remaining sites were rejected because they did not contain a Type Np stream. Of the remaining sites, three were rejected because they had profound natural anthropogenic or natural disturbance and it was assumed that a reference could not be found. The

remainder were not included for logistical reasons (e.g., multiple small landowners in the basin) or because a suitable reference could not be found. While the rejection of sites can create a biased sample, the six sites selected for inclusion appear to be representative of the population of interest, with the exception sites with ongoing or major recent disturbance.

The three site pairs identified for inclusion of the study span a gradient of precipitation and channel wetness. The first pair of basins (Springdale) is approximately 27 miles northwest of Spokane, average 196 acres in size, are east facing and are dominated by second growth ponderosa pine. Both basins are isolated (or hanging) Np with no channel connection to downstream fish-bearing waters. They average about 2800 feet of channel that is mostly dry by late summer. The second pair of basins (BlueGrouse) is approximately 34 miles due north of Spokane, average 84 acres, are east facing and composed of second-growth mixed conifers. The northern treatment basin has about 2400 feet of channel, half of which is likely to be dry in late summer while the reference is flowing through most of its length. The third set of basins (Tripps) is approximately 24 miles northeast of Spokane (just east of Mount Spokane), averages 111 acres, are north facing and are dominated by Douglas fir and western redcedar. These sites each have over 4000' of channel that is largely perennial (Table 2; Figure 3).

A GIS exercise was conducted to evaluate how representative these sites were in terms of climate and hydrology compared to the population of interest. For climate (temperature and precipitation) we used the 1981-2010 Annual PRISM normals (PRISM Climate Group, 2012) and for hydrology we used the Hydrologic Landscape Characterization framework developed by Leibowitz and colleagues (2016) for the Pacific Northwest. The 2006 CMER lands layer was used to restrict the analysis to the domain of interest.

The exercise revealed that the three sites (Springdale, BlueGrouse, and Tripps) are very representative of annual minimum and maximum temperatures in the population of interest and span a gradient of precipitation with annual precipitation normals of 485, 685, and 1024mm/yr, respectively, which is very close to the 25th percentile, mean and 90th percentile of the annual precipitation in the target population (Figure 4).

Table 2: Basin characteristics for the three sites north of Spokane.

	Springdale		BlueGrouse		Tripps	
	North	South	North	South	West	East
Latitude	47.99706	47.99187	48.17171	48.16838	47.9168	47.91644
Longitude	-117.7131	-117.7178	-117.3847	-117.3829	-117.0565	-117.0481
Basin area (acres)	223	169	65	103	126	97
Elevation range (min-max, feet)	1884-2922	1880-2688	2857-4069	2832-4088	3032-3970	2866-3967
Approx. Channel length (ft)	3100	2500	2400	2100	6100	4200
Precipitation (mm)*	484	485	685	685	1022	1028
Temperature Min (deg. C)*	1.9	2	1.1	1.1	2.1	2.2
Temperature Max (deg. C)*	14.0	14.3	12.1	12.1	11.9	11.8

*30 year annual PRISM climate normals (1981-2010).

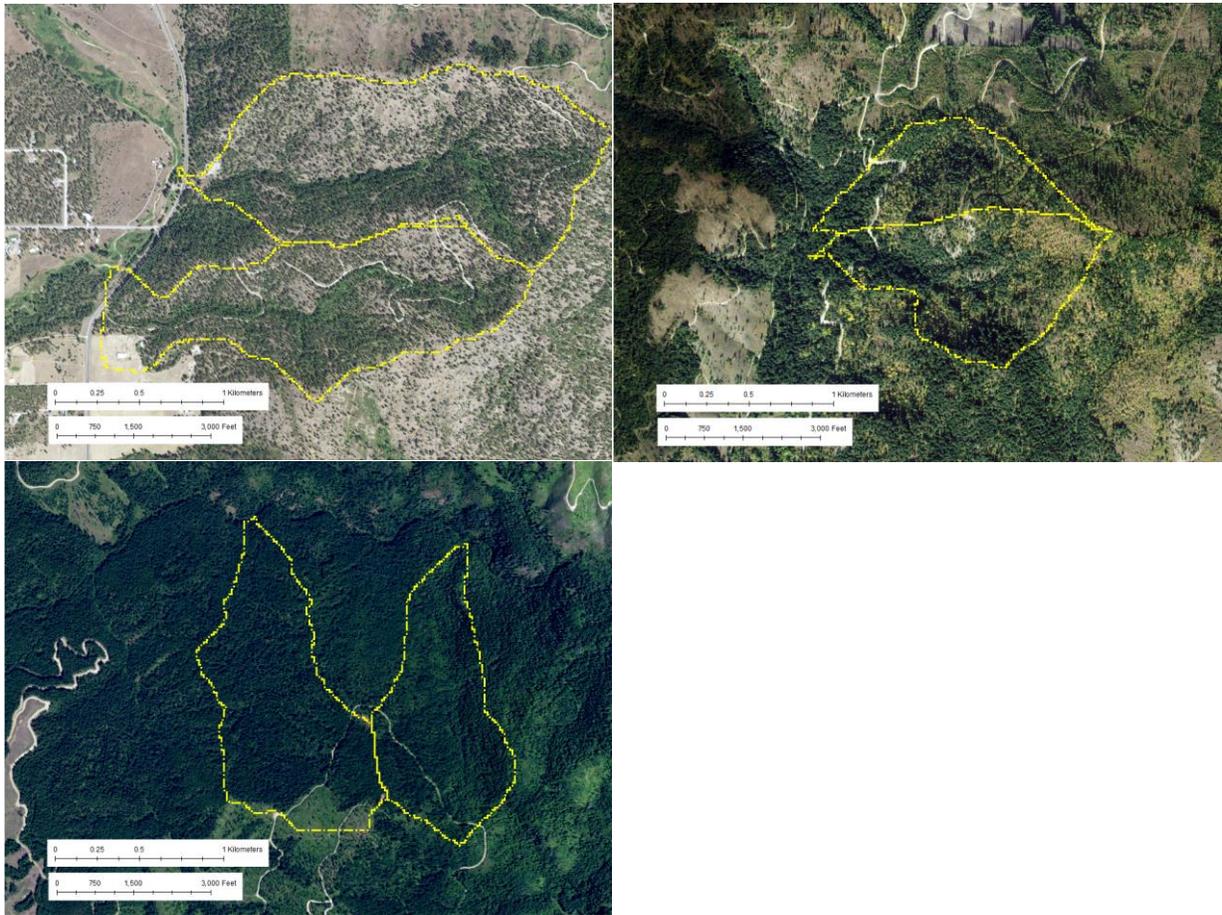


Figure 3: Basin pairs at Springdale (top left), Blue Grouse (top right), and Tripps (bottom).

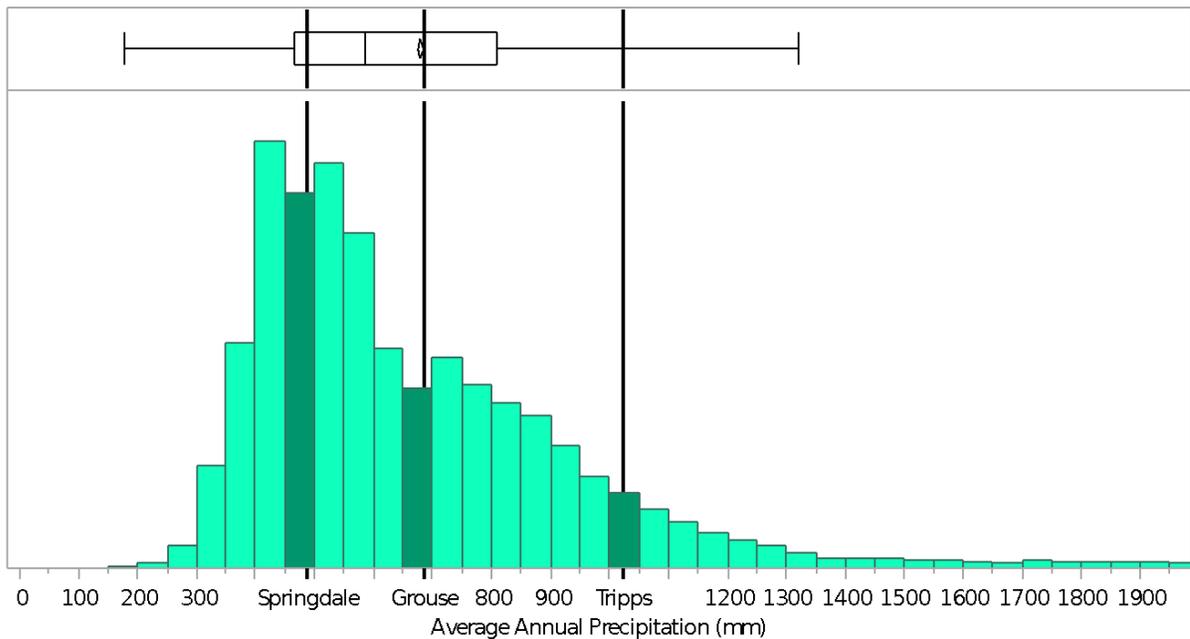


Figure 4: Annual precipitation normals for the Springdale, BlueGrouse, and Tripps sites compared with the population of interest.

The Hydrologic Landscape Characterization also includes a climate class and the result is very similar, with Springdale being called Dry, BlueGrouse Moist, and Tripps Wet; with Dry, Moist and Wet representing 36%, 32%, and 21% of the area of interest, respectively (Table 3). In terms of climate and terrain, the three sites are well-distributed. The sites are a little bit weighted towards having snowmelt dominated spring runoff and all the sites are classified as having low aquifer permeability. In eastern Washington, most of the high permeability basins are located in the Eastern Cascades Slopes and Foothills ecoregion.

CMER staff are currently working with Washington State Lands foresters to identify additional site pairs spanning a similar hydrologic gradient but located in the eastern Washington Cascades and Foothills. Study authors recommend proceeding with the existing three basin pairs and up to three additional basin pairs located in the eastern Cascades region if additional sites can be identified. If possible, additional sites should have stream orientations that differ from the existing three sites given the importance of basin orientation on solar exposure, evaporative demand, and prevailing wind stress.

Table 3: Distribution of target population land area and paired sites by the Hydrologic Landscape Characterization for the Pacific Northwest (Liebowitz et al., 2016).

Class	Categories	Proportion of population area	Sites
Climate	Very wet	3%	
	Wet	21%	Tripps
	Moist	32%	BlueGrouse
	Dry	36%	Springdale
	Semiarid	8%	
	Arid	-	
Seasonality	Fall or winter	62%	Springdale
	Spring	38%	BlueGrouse, Tripps
Aquifer Permeability	High	40%	
	Low	60%	Springdale, BG, Tripps
Terrain	Mountain	79%	BlueGrouse, Tripps
	Transitional	21%	Springdale
	Flat	-	
Soil Permeability	High	-	
	Low	100%	Springdale, BG, Tripps

Research Questions

1. How does basin harvest affect the magnitude and timing of surface water discharge from the Type Np basin, and the amount and timing of dry reaches (if applicable)?

Forest harvest typically increases water yield and can affect the magnitude and timing of stream discharge, but the hydrologic response to harvest is likely to differ between rain-dominated and snowmelt-dominated systems, among basins with differing biophysical characteristics, and among climatic events of differing characteristics. We will measure discharge at the basin outlet, and employ a MBACI analytical approach to quantify changes in yield, magnitude, frequency, and timing of streamflow. The spatial extent of dry and flowing reaches will be determined near the start of the late-spring drying period and end of the summer dry periods (McNamara *et al.*, 2005) by direct observations. We will compare and contrast the results of this study with the results of the two Type N studies in western Washington to better understand differences between rain and snow-melt dominated systems in the hydrologic response to forest practices. Understanding how harvest affects stream hydrology is critical to our understanding of forestry effects on sediment transport, water temperature, and nutrient export.

2. How does harvest of Type Np stream basins affect the number, size, total volume, and distribution of woody debris within study reaches?

The importance of LWD in forest stream ecosystems is widely known, and the contribution of SWD, particularly in headwater streams, is becoming increasingly recognized. We will quantify the short-term effects of specific forest harvest prescriptions on the frequency, size, volume, and distribution of in-channel LWD and on the volume and biomass of SWD in the study basins.

3. Is there a relationship between the frequency and magnitude of sediment delivery pathways from forest units to streams and suspended sediment export (SSE), and how do pathways differ between treatment and reference basins before and after treatment?

Sediment is a key component of channel forming processes, but excess sediment can impair water quality. As a result, the Forest Practices Rules were designed to minimize the delivery of management-induced coarse and fine sediment to streams. We will identify sediment delivery pathways and will explore whether sediment pathway frequency, magnitude, or type appear to change in response to treatment application. We will continuously measure turbidity and will sample surface water suspended sediment concentrations at the Type Np basin outlet. Using this data, we will estimate changes in SSE and relate them to any observed changes in source contribution.

4. How does water temperature change within the Type Np basin, and can we relate temperature change to change in shade?

Previous research indicates that substantial variability in stream temperature response may exist within a Type N stream network. We will examine the rate of reach scale surface water temperature change among a suite of discrete points within the Np stream network. We will use a range of metrics (including daily minimum, daily maximum, and diel fluctuation) to infer reach scale effects associated with different riparian management strategies and change in shade.

5. How does harvest affect water temperature at the basin outlet and in downstream fish bearing waters?

One objective of the Type N riparian prescriptions is the prevention of increased water temperature entering and flowing through downstream Type F waters. The analysis will evaluate changes in several metrics related to surface water temperature, including the 7-day average of the maximum daily water temperature (a metric used in the water quality standards) at the outlet of the Type Np basin. Temperature sensors will be installed in downstream fish-bearing waters where treatment effects can be isolated (e.g., there are no tributaries from other basins flowing into the reach). In these instances, shade measurements will also be extended downstream.

6. How do canopy closure, effective shade, stream cover, hydrologic condition, periphyton (both as chlorophyll-a and ash-free dry mass), and detritus standing crops change in response to the different buffer treatments?

Forest Practices Rules recognize the role that riparian forests play in providing shade, detritus, and woody debris to streams as well as the role of forests on the hydrologic cycle. We will determine how canopy closure, effective shade, stream cover, hydrologic condition, abundance of periphyton, and amount of streambed detritus differ among buffer treatments in the two years after harvest.

7. How do benthic invertebrate assemblages and amphibians respond to the different buffer treatments?

Benthic invertebrates and amphibians are sensitive to alterations in flow, temperature, nutrients, sediment, and food sources associated with forest practices. We will determine if benthic invertebrate assemblages differ among buffer treatments in terms of three types of measures: (1) estimates of abundance and food web structure that are relevant to higher trophic levels (e.g., amphibians, fish, and birds), (2) an index of biodiversity loss comparable to indices of taxonomic completeness that are used in Washington and elsewhere to determine if streams are meeting aquatic life use designations with respect to the Clean Water Act, and (3) indices of stressor-specific responses of the invertebrate community to alteration in temperature and fine sediment. We will also determine if detection frequencies of amphibians differ among treatments and reaches.

Analytical Framework

Analytical frameworks provide a methodological template for answering research questions and allow for systematic evaluation of data requirements. In this section, we provide brief explanation of the proposed sampling scheme, field measurements, and analytical techniques. This section is not intended to limit future analyses, but rather to ensure that data requirements and data use have been considered and included in the project budget. Additional analytical methods may be employed as needed.

Sampling Scheme and Field measurements

Within each Type N basin, the Np stream channel network will be delineated into variable length (<150 m) reaches based on changes in topographic shade or riparian condition, significant changes in channel morphology, and changes in flow characteristics (i.e., perennial, seasonal, and mixed as determined through reconnaissance) (Figure 4). Field measurements will occur at reach endpoints or be distributed within reaches depending on the measurement (e.g., temperature at endpoints, shade between endpoints). Discharge and suspended sediment concentration will be measured at flumes located at the basin outlet (Table 4).

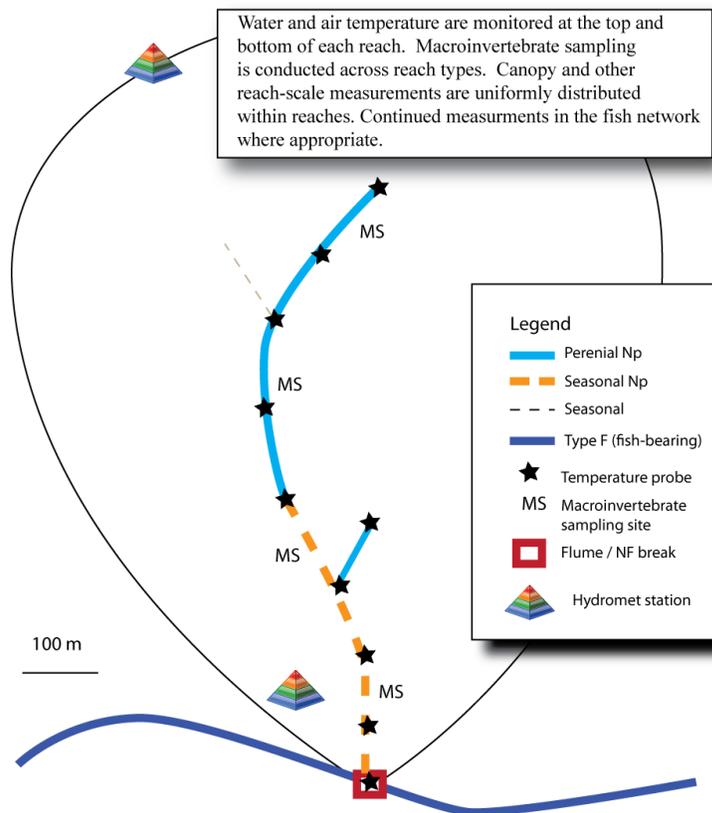


Figure 4: Conceptual diagram showing distributed variable length reaches with temperature monitoring at the upstream and downstream ends with a flume at the Np basin outlet.

Table 4. Variables measured in the study.

<i>Parameter</i>	<i>Methodology/instrument</i>	<i>Resolution</i>	<i>Frequency</i>
Measured at selected sites within each basin			
Hydrologic Maturity	Washington Forest Practices Board Manual	Basin	Pre- and Post-harvest
Air temperature/relative humidity	Vaisala HMP60 combination probe -40 to 60 °C; 0 to 100% RH	0.05 °C 0.02% RH	0.25 hour
Shortwave radiation (SW) and Longwave radiation (LW)	Hukseflux RA01 2-component radiometer SW: 0 to 1600 W m ⁻² ; LW: -300 to 300 W m ⁻²	~0.015 W m ⁻²	0.25 hour
Wind speed and direction	Met One 034B 0 to 45 m s ⁻¹	0.11 m s ⁻¹	0.25 hour
Snow depth	Campbell Scientific SR50A 0.5 to 10 m	0.25 mm	0.25 hour
Precipitation (all weather)	OTT Pluvio ² 1500 mm capacity	0.1 mm	0.25 hour
Soil temperature	Campbell Scientific 107 -35 °C to 50 °C	0.2 °C	0.25 hour
Air temperature (points)	StowAway TidbiT -20°C to 50°C	0.2°C	0.25 hour
Surface water temperature (points)	StowAway TidbiT -5°C to 37°C	0.2°C	0.25 hour
Surface water temperature (longitudinal)	Longitudinal survey of stream temperature in Np network using TidbiT and GPS	0.2°C	Seasonally
Subsurface water temperature (points)	StowAway TidbiT -5°C to 37°C	0.2°C	0.25 hour
Effective shade	Hemispherical photos and solar path analysis, Solar Pathfinder, Eppley pyranometer @ 1 m and water surface	NA	Annually
View-to-sky	Hemispherical photos and view-to-sky analysis, Spherical Densimeter @ 1-m and water-surface	NA	Seasonally
Tree stocking	Vegetation transects within RMZs	NA	1-pre, 1-post
Sediment delivery pathway	Survey of all channels and roads	10 m	Seasonally
Lateral and longitudinal extent and distribution of wetted channel	Survey of entire channel system	10-m reach	Seasonally
Channel change	Monumented cross-sections surveyed with a total station from 10 locations per site.	1 cm	Annually
In-channel LWD and SWD	Samples collected from 3-5 reaches within each basin	100-m reach	Seasonally
Periphyton and detritus standing crops	Samples collected from 3-5 reaches within each basin	100-m reach	Seasonally
Benthic invertebrate densities and composition	Samples collected from 3-5 reaches within each basin	100-m reach	Seasonally
Measured at the outlet of each basin			
Water stage/discharge (point)	Flume with pressure transducer	NA	10-minute
Turbidity	DTS 12 Digital Turbidity Sensor with ISCO Model 3712C automatic pump sampler	0.01 NTU	10-minute

Suspended sediment concentration	ASTMD3977B	1 mg/L	Storm events @ turbidity thresholds
----------------------------------	------------	--------	-------------------------------------

Hydrologic maturity

Upland cover will be measured pre- and post-harvest, evaluating hydrologic maturity within each basin, using procedures prescribed by the Washington Forest Practices Board Manual (2011). These methods distinguish forested and non-forested cover, then further classify forest cover based on conifer canopy cover. Pre- and post-harvest levels will be assessed using supervised aerial photo classification, validated in the field using spherical densiometers.

Hydrometeorological data collection

Hydrometeorological monitoring stations will be installed at each pair of study watersheds. One station will be located near the highest elevation and one will be located near the watershed outlet to monitor both precipitation and air temperature lapse rates and provide redundant measurements within the study watersheds. Stations will be located in small forest clearings where open locations are not available. The primary hydrometeorological station will record all-weather precipitation, snow depth, incoming shortwave and longwave radiation, air temperature, relative humidity, wind speed and direction, and soil temperature. A secondary meteorological station will be installed at a contrasting elevation and will record all-weather precipitation, snow depth, and air and soil temperature. Remote cameras will be installed at each weather station to record general patterns of snow distribution on contrasting aspects. Measurements will be recorded year-round at 15-minute intervals, and images will be recorded at least daily.

Data from the hydrometeorological stations will be used diagnostically to understand how timber harvest affects key processes and metrics including runoff ratios, flow-generation mechanisms (e.g. snow melt, rain-on-snow, rain), sediment transport, large wood recruitment from windthrow, and timing and amount of stream heating. This will be especially important to understand how changes in basin-level conditions (e.g. increased runoff generation) interact with reach-level changes (e.g. reduced shade) to produce temperature and other related changes.

Water and air temperature measurements

Automated temperature loggers will be used extensively to capture variations in both time and space that are expected to be relatively large given the small size, and therefore sensitivity of these systems to changes in the stream energy budget. Surface water temperature (Table 5) will be recorded year-round at 15-minute intervals using TidBit dataloggers (Onset Computer Co) at fixed stations at the top and bottom of each reach. Thermal reconnaissance of monitoring sites to identify obvious areas of groundwater upwelling and flow stagnation will be completed with the aid of a thermal imaging camera. Sampling site reconnaissance will be augmented with electrical conductivity surveys to identify anomalies that may be associated with localized groundwater inflows (Oxtobee and Novakowski, 2002) that may not be evident by thermal imaging (e.g. for cases where stream and groundwater temperatures are not distinct). Stream temperature probes will be placed in PVC pipe and submerged near the channel thalweg in an area without

significant upwelling or stagnation. There is little precedent in the scientific literature for either process-based studies or standard methodologies for conducting research on such small streams, and hence it is anticipated that innovative techniques will need to be developed to answer the study questions related to flow and temperature dynamics.

Subsurface water temperature will be recorded year-round at 15-minute intervals TidBit data loggers (Onset Computer Co) at stations at the top and bottom of seasonal reaches. Where installation of piezometers in the streambed are not likely to alter subsurface flow (e.g. alluvium vs. fractured bedrock), stream temperature probes will be installed at depths of 0.15, 0.5, and 1 m below the streambed where possible.

Additional stream temperature probes will be placed in PVC pipe and submerged near the channel in areas suspected of significant groundwater discharge to the stream based on water temperature and electrical conductivity measurements recorded during the channel reconnaissance. Where substantial flow is gained, subsurface water temperatures will also be monitored.

Air temperature will also be recorded at 15-min intervals at each water temperature site. The data logger will be placed approximately one meter above the soil surface, adjacent to the stream bank, and sheltered from shortwave radiation by installing the sensor in a Gill radiation shield to minimize temperature measurement bias (Terando *et al.*, 2017).

Riparian cover and effective shade

Riparian cover and effective shade will be measured using various methods intended to support comparison of study results to relevant studies elsewhere in the Pacific Northwest (e.g., Cupp and Lofgren 2014, Ehinger 2015, Gravelle and Link 2007, Groom *et al.* 2011, Keefe *et al.*, 2015, Shumar and de Varona 2009, and Teply *et al.* 2015). We will estimate view-to-sky at 1 meter height and at the water surface using a spherical densiometer. A Solar Pathfinder will be used to measure effective shade at 1 meter height and at the water surface. Hemispheric canopy photos taken at 1 m above the water surface and at the water surface will be digitally processed estimate canopy and topographic density (CTD) and effective shade.

Percent canopy cover from low-growing trees, shrubs, and herbaceous vegetation below 1 meter will be measured along the streambank and over the stream using line-intercept methods adapted from Harris *et al.* (2005). Line intercepts will be conducted using ground-based LiDAR.

Riparian vegetation

Riparian stand data will be collected at a series of fixed-area strip plots within each Np reach. Plots will be distributed so that the riparian vegetation within each basin is systematically sampled with a minimum of 10 plots per basin and a maximum of 50 plots. Guidelines for transect spacing in Teply *et al.* (2013) will be followed to minimize autocorrelation among observations. Each plot will extend 7.6 m (25 ft) parallel to the channel azimuth and 15.24 – 22.86 m (50 -75 ft) out in a perpendicular direction on each side of the stream, corresponding to the width of the RMZ buffer. All standing trees ≥ 10 cm (4 in) diameter breast height (DBH) will be counted in each plot, along with their distance to the streambank, condition (live/dead), species, DBH, and live crown ratio.

Sediment delivery pathways

Measurements of sediment delivery are based on the methodology of (Litschert and MacDonald 2009). This methodology involves mapping and characterizing rills, gullies, and overland flow sediment deposits. In this methodology, rills are defined as erosional features having incised banks with no minimum depth and gullies are erosional features with incised banks greater than 30 cm deep or cross-sectional areas larger than 1000 cm²; sediment deposits resulting from overland flow are called sediment plumes. To be recordable, a feature must have a minimum length dimension of 10 m so as to be locatable with a resource grade GPS and analyzed against attributes calculated from 10-m DEMs.

Field crews will traverse both sides of all stream channels within the basin to identify sediment pathways. These traverses will parallel the channel at a distance of approximately 10 ft. and along the outer edge of the RMZ. Features will be identified and mapped, the source described (e.g, skid trail, road, fire, unknown), condition (e.g., new exposed, partially vegetated) and dimensions recorded, including length from source to outlet, and it will be noted whether the feature is directly connected to the channel. Field crews will also look for and map any mass wasting features (e.g., slumps, earthflows, debris-slides) and record relative activity level and potential data of occurrence. Road drainage will be mapped and ditch condition, average road slope, and road crown and surfacing characteristics will be recorded for any section draining to a channel.

Pathways will be mapped in GIS and relevant topographic attributes (e.g., planform convergence) associated with each feature will be extracted using the highest resolution digital elevation models (DEM) available.

Stream network surveys

Seasonal GPS surveys and monumented time-series photography will be used to identify the spatial extent of flowing water, discrete changes in discharge, and areas of stream adjacent wetland that are in contact with the channel. Each reach will be given a hydrologic condition code and the change in net stream length for each code will be calculated for each season and year. During the summer sampling event, water temperature and electrical conductivity will be measured at 10 m increments throughout the wetted channel network. These data will be used to identify locations with discrete temperature and/or bulk biogeochemical changes that may result from groundwater and/or hyporheic flow inputs.

Cross-sectional surveys

Cross-sectional surveys will be conducted using a total station with angular accuracy of 1" or better and EDM accuracy of 1 mm + 2 ppm or better and a pole-mounted prism in order to accurately quantify channel aggradation and degradation. Instrument locations and backsight azimuths will be permanently monumented using rebar or magnetic ground stakes that are real time kinematic (RTK) surveyed for redundancy. Cross-sections will be established along a single foresight azimuth. Cross-section surveys will be conducted such that they accurately portray the elevations of channel features within the floodplain, and will record all breaks in slope, any bankfull channel markers, and edge of water surface.

Woody debris

Measurements of large woody debris loading are based on the methodology of Kaufmann *et al.* (1999), allowing quantitative estimates of the number, size, total volume, and distribution of large woody debris (LWD) within study reaches. LWD is woody material with small end diameter of at least 10 cm and length of at least 1.5 m. For each LWD piece, field surveyors will visually estimate length and both end diameters.

Field crews will tally all pieces of LWD that are at least partially within the bankfull channel margins, both vertically and horizontally, followed by those above the top-of-bank but within the channel horizontal margins. Tallies will assign LWD pieces to one of twelve diameter and length categories. The diameter classes are 0.1 m to < 0.3 m, 0.3 m to < 0.6 m, 0.6 m to < 0.8 m, and \geq 0.8 m, based on the small end diameter. The length classes are 1.5 m to < 5.0 m, 5 m to < 15 m, and \geq 15 m, based on the portion of the LWD piece that is \geq 10 cm diameter and within the channel margins.

LWD pieces will be tallied according to 12 diameter and length size classes, with location identified as in or above the channel margins. Primary metrics are then calculated as the number of pieces and estimated volume of wood in the following primary size classes:

Length			
<u>Diameter</u>	S (1.5 m to < 5.0 m)	M (5 m to < 15 m)	L (\geq 15 m)
S (0.1 m to < 0.3 m)	SS	SM	SL
M (0.3 m to < 0.6 m)	MS	MM	ML
L (0.6 m to < 0.8 m)	LS	LM	LL
X (\geq 0.8 m)	XS	XM	XL

A nominal mean volume will be calculated for each piece of LWD according to its diameter-length class membership, as follows:

$$(\pi) [1.33 (\text{Class minimum Diameter} \div 2)^2] \times [1.33 (\text{Class minimum Length})]$$

Numbers and volumes of LWD in each diameter-length class will be regrouped and assigned to five cumulative size classes and cumulative metrics will be calculated as follows:

Class 1 – All size classes

Class 2 – All size classes, except SS

Class 3 – All size classes, except SS, MS, LS, SM

Class 4 – LM, XM, ML, LL, XL

Class 5 – XL

LWD cumulative metrics calculated for each size class:

PCS/100 m	LWD in within the channel margins (pieces/100m)
VOL/100 m	LWD volume within the channel margins ($\text{m}^3/100\text{m}$)
PCS/ m^2	LWD within the channel margins (pieces/ m^2)
VOL/ m^2	LWD volume within the channel margins (m^3/m^2)
PCS/100 m-all	LWD within and above the channel margins (pieces/100m)

VOL/100 m-all

LWD volume within and above the channel margins ($\text{m}^3/100\text{m}$)

Small woody debris (SWD) consists of smaller (diameter < 0.1 m, length < 1.5 m) woody pieces that commonly contribute to stream cover, shading, and habitat complexity. SWD can respond to channel disturbance. SWD will be measured adapting Forest Inventory and Analysis protocols for line-intercept methods of monitoring downed fine woody debris (Woodall and Monleon 2008). Pilot surveys will be conducted to determine the number and spacing of transects required to meet acceptable sampling error rates. Transects will be located within the stream channel, aligned perpendicular to the thalweg. Along each transect, SWD will be tallied by one of three size classes (0 to 0.25 in, 0.25 in to 1 in, and 1 to 4 in). Volume of SWD would be calculated directly from transect tallies and biomass would be calculated using bulk density factors tied to these size classes in Woodall and Monleon (2008).

Macroinvertebrates, amphibians, benthic detritus, and periphyton

The aim of sampling macroinvertebrates, amphibians, benthic detritus, and periphyton is to provide a robust estimate of the abundance and composition of aquatic species and their resources. We considered the use of three types of samples that have traditionally been used to estimate the abundance and composition of invertebrates and other taxa within streams – (1) samples taken from benthic substrates (the primary habitat of the vast majority of stream dwelling invertebrates), (2) samples of emerging adult insects, and (3) samples of invertebrates drifting in the water column.

Benthic sampling is by far the most frequently used method for estimating abundance, production, and species composition of stream invertebrate assemblages (Merritt *et al.* 2008) and is the method used in all state-level biological monitoring programs (e.g., Carter and Resh 2001; Carter *et al.* 2006) and most previous studies of the effects of forest practices on stream invertebrates (e.g., Newbold *et al.* 1980; Hawkins *et al.* 1982, 1983, 2000; Campbell and Doeg 1989; Carlson *et al.* 1990; Kiffney *et al.* 2003; Quinn *et al.* 2004; Hernandez *et al.* 2005; Reid *et al.* 2010). Reach-level estimates must be derived from small samples taken at random locations within the reach of interest. A large enough number of these samples must be collected to overcome effects of within-reach, spatial heterogeneity in substrate size and current velocities on reach-wide estimates and produce estimates that are accurate and precise enough to detect ecologically meaningful effects of treatments. However, high variability among replicate samples and the expense of processing high numbers of replicates can compromise the sensitivity of assessments based on benthic samples.

Some previous studies have estimated emergence of adult insects to help assess the effects of forest and watershed disturbance or management on the productive capacity of streams (e.g. Banks *et al.* 2007, Mellon *et al.* 2008), but emergence samples are notoriously inefficient - e.g., based on an extensive review of the literature Davies (1984) reported that emergence traps captured 3-83% of benthic populations depending on species. Moreover, emergence traps sample only species with terrestrial life stages and are much more expensive to use given that many individual traps must be constructed or purchased, installed, and then visited frequently enough (e.g., every 3-4 days) to avoid bias associated with both high seasonal variation in emergence of different species and loss of trapped individuals following capture.

In contrast to benthic and emergence samples, drift samples can provide an estimate of those invertebrates most likely to be consumed by salmonids and other fish species that capture prey from the water column. Drift samples can also provide an estimate of potential invertebrate export to downstream reaches. However, robust estimates of drift require sampling over multiple 24-hour periods, which can be logistically difficult, if not impossible, when streams in several basins must be sampled. The cost of processing the number of samples needed to produce robust estimates of drift densities can also limit their utility.

The small size of headwater streams (often < 30 cm wetted width) restricts the type of traditional sampling gear we can use for invertebrates and amphibians. We will therefore use two sampling approaches to quantify aquatic life endpoints: (1) traditional benthic samples taken from a standard area at each of several randomly selected locations within study reaches and (2) environmental DNA (eDNA) samples filtered from a standard volume of stream water from each study reach (Yu *et al.* 2012; Deiner *et al.* 2017; Elbrecht *et al.* 2017). Traditional samples will allow us to estimate densities and biomass standing crops of the dominant species and identify their microhabitat requirements. eDNA samples represent well mixed DNA shed from organisms inhabiting all habitats within a reach. Because of high detection sensitivities, eDNA will allow us to more fully describe the species composition that occurs in each basin and reach than traditional sampling methods that typically suffer from extremely low detection efficiencies. Use of eDNA will also allow us to identify taxa to a much lower-level of taxonomic resolution than is possible from traditional samples, which are typically identified only to genus, family, or even coarser levels of resolution. eDNA samples also have a much higher chance of detecting specific species of interest that can be very difficult to detect with physical sampling (e.g., many amphibians). The chief disadvantage of eDNA is that eDNA samples cannot yet be used to estimate abundances.

Macroinvertebrates, amphibians, periphyton standing crops, and detritus standing crops will be collected seasonally at 3-5 reaches that represent the major reach types within each basin. Prior to sampling, we will walk the entire stream network in each basin and classify reaches based on their geomorphic and hydrologic properties. Because such small streams as the ones we will study have not been the primary focus of previous attempts to classify stream reaches and habitats (e.g., Hawkins *et al.* 1993, Bisson *et al.* 2017), we cannot a priori identify the specific classification system we will use, but it will incorporate information on whether reaches have perennial or seasonal flow, are geomorphically constrained or alluvial, have higher or lower channel gradients, and have relatively open or closed canopies. The classification should allow us to partition effects of natural environmental factors on aquatic life, but equally importantly it will provide a systematic means of ensuring that we sample all major habitat types within a basin.

At each study reach, we will follow the protocols outlined in Carim *et al.* (2015) to sample eDNA. We will use a peristaltic pump to pass 4-10 liters of water through a 1.5- μ m pore size disposable filter. Filters will be carefully removed in the field using sterile techniques and preserved individually with a silica gel desiccant. Preserved samples will be processed by the Utah State University Molecular Ecology Laboratory. All sampling equipment will be bleach-sterilized between each site to eliminate cross-site contamination. At every tenth site a negative field control (1 L sterilized DI water) will be collected after sampling to monitor for cross-contamination.

At each sampling site, we will also use a small diameter (15 cm diameter) sediment core to collect benthic invertebrates, inorganic substrates, and detritus from five locations within each reach equidistantly spaced along the thalweg of each reach. Cores will be inserted up to 15 cm into the stream bed (or until blocked by large substrates) and all material removed to sample jars. The five samples collected per reach will be pooled to form one sample representative of the reach. Samples will be preserved in 95% ethanol. Samples will later be processed in the lab to remove and identify invertebrates, characterize inorganic substrate size distributions, and quantify detritus standing crops. Periphyton standing crops will be estimated as both chlorophyll-a and ash-free dry matter. Chlorophyll-a standing crops will be measured in situ with a BenthosTorch® at 30 equidistantly spaced locations along the thalweg of each reach. Immediately after sampling, all sampling gear (nets, boots, etc.) will be disinfected to minimize the risk of spreading invasive species or pathogens (Parsons *et al.* 2012).

In the laboratory, we will follow standard protocols developed by the USU/BLM National Aquatic Monitoring Center (<https://www.usu.edu/buglab/SampleProcessing/>) to process benthic samples. Detritus will be elutriated from the inorganic sediments. This material will then be subsampled, if needed, to reduce the time needed to identify invertebrates. Subsampling will entail sequential removal of random portions of the sample until a total of 600 organisms are encountered. If less than 600 individuals occur in a sample, the entire sample will be processed. Individual macroinvertebrates will then be identified to lowest practical taxonomic level (typically genus). The remaining detritus will be dried, weighed, combusted, and then reweighed to determine the mass of detritus present in each sample. Invertebrate densities and detritus standing crops will be estimated from the area sampled and the proportion of each composite sample that was subsampled. Inorganic materials from each sample will be washed through nested sieves of progressively smaller mesh size to isolate different particle sizes. The volume of each size fraction will then be determined by displacement.

Discharge and suspended sediment export

A 12- to 24-inch (depending upon basin area and estimated average annual precipitation) Montana flume will be installed near the Type N/F junction, or in the reference basin at a location likely to have surface water discharge. In each flume, a pressure transducer will measure stage height. Flow will be calculated from stage height using the appropriate equation for the flume. Turbidity Threshold Sampling (Lewis and Eads, 2009) will be implemented using a Forest Technology Systems DTS-12 turbidity sensor, recording at 10-minute intervals, located as near the Type F/N junction as practicable. An ISCO Model 3712C automatic pump sampler, activated at a specific turbidity threshold value on both the rising and falling limbs of the turbidigraph, will collect discrete samples during high turbidity events and during base flow conditions. These samples will be analyzed for suspended sediment concentration (SSC) that will be used to develop a regression model to estimate SSC from the continuous turbidity record. The product of the estimated SSC and the associated flow, estimated from stage height at the flume, will be summed to calculate daily and monthly suspended sediment loads. Loads may also be evaluated over other time intervals to describe suspended sediment transport seasonally or during specific events.

Analytical Methods

As noted previously, the purpose of this section is not to lock the study into an *a priori* set of methods, but rather to describe how the data would be analyzed today to address the research questions below. Alternate methods may be used and the methods described here may be expanded upon.

Research Question 1: How does basin harvest affect the magnitude and timing of surface water discharge from the Type N basin?

For days with measurable surface water discharge, daily discharge will be calculated as the sum of the sub-daily measurements and will be normalized to contributing area. For periods without discharge, we will use a permutation or similar test to determine whether there is a change in the frequency no flow events.

For days with surface water discharge, the daily treatment effect (TE) can be estimated through a comparison of what would have been observed had the treatment not occurred (the “expected condition”) and what was actually observed in the treatment basin during the post-treatment period.

$$TE = (y_t - \hat{y}_t) \quad (6)$$

where: y_t is the observed discharge on day t of the post-treatment period, and
 \hat{y}_t is the expected discharge on day t of the post-treatment period.

We will use the regression analysis approach advocated by Watson and others (2001) and Gomi and others (2006) to determine the expected condition. Daily data from the pre-treatment period will be fit to a generalized least-squares (GLS) regression model of the form:

$$y_t = \beta_0 + \beta_1 x_t + \beta_2 x_t^2 + \beta_3 \sin \frac{2\pi t}{365.25} + \beta_4 \cos \frac{2\pi t}{365.25} + \varepsilon_t \quad (7)$$

where:
 y_t is the temperature in the treatment site on day t ,
 x_t is the temperature in the reference site on day t ,
 $\beta_0, \beta_1, \beta_2, \beta_3, \beta_4$ are the estimated regression coefficients,
 $\sin(2\pi t/365.25)$ and $\cos(2\pi t/365.25)$ are terms to account for seasonal variability,
and
 ε_t is an error term.

The error term (ε_t) can be modeled as an AR(p) process where the current error depends on previous errors:

$$\varepsilon_t = \phi_1 \varepsilon_{t-1} + \dots + \phi_p \varepsilon_{t-p} + a_t \quad (8)$$

where: ε_{t-p} is an error term p days before,
 ϕ_p is the autocorrelation coefficient at lag p , and
 a_t is white noise centered at 0 and assumed to be independent of previous observations (i.e., $a_t \sim \text{WN}(0, \sigma_a^2)$).

Alternatively, ε_t can be modeled as a MA(q) process where the random error at time t are affected by both a perturbation at time t combined with perturbations taken before time t (additional correlated noise terms). In this case:

$$\varepsilon_t = \theta_1 a_{t-1} + \dots + \theta_q a_{t-q} + a_t \quad (9)$$

where: a_{t-q} is the noise term q days before, and

θ_q is the correlation coefficient at lag q .

As shown in Pinheiro and Bates (2000), the AR(p) model and the MA(q) models can be combined into an ARMA(p, q) model as:

$$\varepsilon_t = \sum_{i=1}^p \phi_i \varepsilon_{t-i} + \sum_{j=1}^q \theta_j a_{t-j} + a_t \quad (10)$$

Since the standard calculation of r^2 is not appropriate to GLS, we will estimate a coefficient of determination (R^2) based on likelihood-ratios:

$$R^2_{LR} = 1 - \exp(-2/n * (\log Lik(x) - \log Lik(0))) \quad (11)$$

where: $\log Lik(x)$ is the log-likelihood from the fitted model, and

$\log Lik(0)$ is the log-likelihood from the null model (i.e., intercept only).

We will use Eq. 7 and the pre-treatment discharge data to develop a prediction equation. We will then use that prediction equation to determine the expected discharge for each day in each treatment basin (\hat{y}_t).

We will compare several different measures of hydrologic change (both frequency and magnitude) using cumulative frequency and flow exceedance of both observed discharge and predicted discharge. If we detect changes in either flow frequency or magnitude, we will use the hydrometeorological station data to help identify potential causal mechanisms for the change including dominant flow-generating processes, and general role of snowpack in contributing to the surface flow regime.

The spatial extent of dry and flowing reaches will be determined near the start of the late-spring drying period and end of the summer dry periods by direct observations. We will use GPS and total station surveys to create a spatial coverage of hydrological condition over repeat surveys. These data will be incorporated into a single GIS line layer for each period, and by intersecting that lines we will determine where and by how much the hydrologic condition changed between surveys.

Research Questions 2 and 6: How does harvest of Type Np stream basins affect the number, size, total volume, and distribution of woody debris within study reaches; and how do canopy closure, shade, stream cover, hydrologic condition, algal and detritus standing crops, LWD loading, and SWD loading change in response to the different buffer treatments?

We will test for spatial autocorrelation among within-basin metrics using Moran's I and variograms and model the correlation or reduce it through averaging or use statistical methods to account for it. Data will be coded by treatment or reference and by period (e.g, pre-treatment vs post-treatment). We will test for a treatment effect using a generalized linear mixed model (GLMM) that incorporates covariates and random effects as appropriate, and treatment, period, and the treatment \times period interaction as fixed effects. If the treatment \times period interaction is significant, we will assume a treatment effect and will examine all treatment contrasts and report unadjusted p -values. GLMM's are chosen here because they allow for the specification of error

distributions and random effects, and GLMM's were the underlying form of analysis in the Type N Experimental Hard Rock study to which this is a companion.

Research Question 3: Is there an immediate relationship between the frequency and magnitude of sediment delivery pathways from forest units to streams and suspended sediment export (SSE), and how do pathways differ between treatment and reference basins before and after treatment?

We will develop a series of exploratory multivariate linear regression models that attempt to relate sediment pathway characteristics (e.g., volume by type) to suspended sediment export over a range of time periods. The candidate models will consider lags, potential explanatory variables derived through expert knowledge (e.g., distance from source to outlet, stream power), and those derived through exploratory analyses using techniques like regression trees or principle components analysis.

Candidate models will then be evaluated using the information theoretic approach advocated by Anderson (2008). Under this approach, the strength of evidence for each of the competing models will be computed as the discrete probability of each model in the set given the data. For each model in the set, we will estimate model parameters using maximum likelihood or some derivation and will compute an Akaike Information Criteria (AICc) value for the model. AIC is an information theoretic approach for model selection and the model with the lowest AICc value is estimated to be the best in the sense of expected Kullback-Leibler (K-L) information loss (Anderson, 2008).⁵

Because AICc scores contain several unknown constants, we will rescale the AICc scores as the difference between the AICc score for the given model i and the model with the lowest AICc score:

$$\Delta_i = AICc_i - AICc_{min} \quad (12)$$

We will then calculate a Bayesian posterior model probability (w_i) that the model (i) is the best K-L model using:

$$w_i = \frac{\exp(-1/2\Delta_i)}{\sum_{r=i}^R \exp(-1/2\Delta_r)} \quad (13)$$

where: w_i is the exponential difference (Δ_i) between model i divided by the sum of exponential differences across all models (Anderson, 2008). If there are more than one plausible models in the set, we will use model averaging across all models using the model probabilities (w_i) as weights and discuss the inference based on the combined set of parameters and their confidence intervals.

To evaluate whether sediment pathway volumes appear to change in response to treatments, we will examine the posterior density for the interaction between sediment volume and study period (e.g., before and after treatment) using hierarchical Bayesian inference solved through Markov chain Monte Carlo (MCMC). We will use a simple multi-level interaction model that incorporates year as a random effect (Kruschke 2015; McElreath 2016).

⁵ In practice, it is important to use AICc which corrects for small sample bias.

Research Question 4: How does water temperature change within the Type N basin, and can we relate temperature change to change in shade or other factors?

Within each basin, the reach-scale change in water temperature (TE) will be determined using the methods described above. We will use graphical displays of daily TE and MMTE with associated 95% confidence intervals to illustrate longitudinal patterns in water temperature relative to canopy cover at the water surface, presence of surface water, summer longitudinal temperature profile and effective shade. Frequency histograms of pre- and post-treatment temperature will also be graphically displayed in a longitudinal format.

We will use a simple additive model to evaluate the relative contribution of different factors, including shade, to the reach-scale change in water temperature:

$$\Delta T_{out} = L + \Delta T_{in} + Shade + \Delta Shade + \Delta Hyp + \varepsilon \quad (14)$$

where: ΔT_{out} is TE for probe at the bottom of the reach,

L is length of the stream reach,

ΔT_{in} is TE for the probe at the top of the reach,

Shade is the initial shade provided to the stream by vegetation and topography,

$\Delta Shade$ is the change in effective shade for the reach as a result of harvest, and

ΔHyp is the post-harvest change in hyporheic residence time.

In evaluating reach-scale change in water temperature, surface water changes will be evaluated along wet reaches and subsurface temperature changes will be evaluated along dry reaches. Where groundwater inputs are observed, a term may be added to the model to account for heat exchange. Reach-scale and basin-scale terms will also be considered, evaluated by their relative influence on temperature flux. We will consider nonlinear terms and will analyze the data using a range of models including Generalized Additive Models and GLMM. We will delete terms (and incorporate other terms as necessary) using information criteria to find the simplest and most parsimonious model.

Water temperature, stream reach length, and shade will all be directly measured, but the change in the hyporheic residence time lag (τ in Eq. 5) will be estimated using air and water temperature. The proposed method is similar to that used by Subehi *et al.* (2009) and involves using linear regression with harmonic variables to quantify the phase of air and water temperature change associated with the diel and annual cycles. Using trigonometric functions to model seasonal temperature cycles, we get:

$$T = A \sin[c(t + \phi)] \quad (15)$$

where: t is the time (e.g., day),

A is the amplitude of temperature fluctuation,

c is the cycle which equals $2\pi/L$, where L is the period (e.g., $L_{season}=365.25$), and

ϕ is the phase shift.

The parameters in equation 15 are not linear, so we use a trigonometric identity to write:

$$A \sin[c(t + \phi)] = U_1 \cos(c \cdot t) + U_2 \sin(c \cdot t) \quad (16)$$

where: $U_1 = A \cos(\phi)$, and
 $U_2 = -A \sin(\phi)$.

Equation 16 is linear and, assuming that U_1 and U_2 are normally distributed random variables, we can write a model of sub-daily temperature measurements expressed as a function of time (decimal days) with daily and seasonal cycles using the following linear model:

$$T_i = \beta_1 \cos(2\pi t) + \beta_2 \sin(2\pi t) + \beta_3 \cos\left(\frac{2\pi}{365.25} t\right) + \beta_4 \sin\left(\frac{2\pi}{365.25} t\right) + \varepsilon \quad (17)$$

where: t is time (decimal day), and
 $\beta_1, \beta_2, \beta_3$ and β_4 are estimated coefficients.
Using the same trigonometric identity shown in 20:

$$\phi = \tan^{-1}(-\beta_2 / \beta_1) + \tan^{-1}(-\beta_4 / \beta_3) * 365.25 \quad (18)$$

where, ϕ is the daily phase. The lag (τ) between air and water response is estimated as the difference between the two phases ($\phi_{\text{air}} - \phi_{\text{water}}$) and ΔHyp is the difference in estimated lag for the pre-treatment and post-treatment periods ($\tau_{\text{pre}} - \tau_{\text{post}}$).

We will identify and examine reaches and periods of time where the change in water temperature appears to be insensitive to change in heat flux related to shade or hyporheic flow. We will examine the spatial relationship between these reaches and the spatial distribution of dry and wet reaches at each survey period and local hydrometeorological conditions. We will then perform post-hoc analyses to develop hypotheses about what factors may be driving water temperature response and identify reaches where temperature change appears to be driven by exogenous factors not considered in this study.

Research Question 5: How does harvest affect surface water temperature and 7-day average maximum surface water temperature at the basin outlet and in downstream fish-bearing waters?

Temperature probes located near the outlet of both treatment and reference basins will measure and record water temperature at 15-minute intervals throughout the period of study. The 15-minute data will be aggregated to daily time series metrics representing minimum, maximum, mean, and diel temperature range in order to reduce serial autocorrelation and issues associated with sub-daily lags.

The temperature TE for each day will be calculated using GLS fitting procedures described in the discharge section and the Hard Rock temperature chapter (McIntyre *et al.* 2017). Using these data, we will calculate a mean monthly treatment effect (MMTE) with 95% confidence intervals for each metric using a GLS model that accounts for temporal autocorrelation and different variance by month. Reference to reference comparisons in the Hard Rock study showed stationarity over many years and that the methods should reliably detect a mean monthly temperature changes as small as 0.5 – 1.0 °C with well-matched reference-treatment sites. The large number of comparisons (months) and the large number of locations will increase the likelihood of a Type II error so these data will not be analyzed in an ANOVA framework. Rather the focus will be on the pattern, magnitude, and variability in the monthly estimates.

In addition, we will calculate the maximum 7-day average TE (7DTE) for the July-August period. The 7DTE is used because it is comparable to the change in the maximum 7-day average daily maximum temperature as referenced in Washington State’s water quality standards. For each treatment, we will estimate effect size with 95% high density intervals using hierarchical Bayesian inference solved through Markov chain Monte Carlo (MCMC). We will use a simple multi-level model that incorporates year as a random effect:

$$y_i = a_{j(i)} + \varepsilon_i \quad (19)$$

$$\varepsilon_i \sim Normal(0, \sigma^2) \quad (20)$$

$$a_{j(i)} \sim Normal(\mu, \tau^2) \quad (21)$$

where: y_i is the maximum July-August 7-day average TE in year i , and μ is the expected value for treatment j .

Research Question 6: Changes in suspended sediment export

Turbidity and suspended sediment vary stochastically and as the result of a large number of geomorphic conditions, therefore change in suspended sediment concentration regime will be determined through a quantitative assessment of the historic return period for suspended sediment concentration in the pre- and post-treatment periods.

We will use an FTS system to conduct Turbidity Threshold Sampling (TTS; Lewis and Eads 2009) so that a water sample is collected by an ISCO pump sampler when stage height and turbidity exceeded specified thresholds for two consecutive measurements. This will ensure that water samples are collected across the range of turbidity values on both the rising and falling limbs. We will follow guidelines in Lewis and Eads (2009) to identify data that were influenced by progressive fouling (biofilm), debris fouling, direct sunlight on the sensor, non- or partial submergence of the sensor, burial of sensor or interference from the stream bottom, and air bubbles entrained in the water.

The measured SSC values and the corresponding turbidity data will be used to build a regression model to predict SSC for the entire data record.

$$SSC_i = \beta_0 + \beta_1 Turb_i + \beta_2 Turb_i^2 + \varepsilon_i \quad (22)$$

where: SSC is the \log_{10} -transformed suspended sediment concentration for sampling event i ,
 $Turb$ is the corresponding \log_{10} -transformed minimum turbidity value,
 β_0 , β_1 , and β_2 are regression coefficients, and
 ε_i is the error term.

SSE will be calculated as the product of the SSC and discharge for each 10-minute period. We will then use the methods similar to those described by Bywater-Reyes *et al.* (2017) for analysis of the Trask River Watershed data. We will develop annual rating curves between hourly suspended sediment export and hourly unit discharge such that:

$$Q_S = \alpha Q^\beta \quad (23)$$

or

$$\log(Q_s) = \beta \log(Q) + \log \alpha + \varepsilon \quad (24)$$

where: Q_s is suspended sediment export ($\text{kg ha}^{-1} \text{h}^{-1}$),
 Q is unit water discharge ($\text{m}^2 \text{ha}^{-1} \text{h}^{-1}$),
 α and β are the erosion terms that will be used to test for treatment effects, and
 ε is the error term.

We will then use mixed models to determine whether there is a period by treatment interaction in the rating curve parameters or whether other factors explain patterns in the relationship between SSC. We will also explore the methods outlined by Aich and colleagues (2014) to examine whether there are quantifiable changes in hysteresis patterns between event normalized discharge and SSC.

Research Question 7: How do benthic invertebrate assemblages and their food sources respond to the different buffer treatments?

The condition of macroinvertebrate assemblages in streams has been measured in several ways, which has confounded comparisons across different studies. Here we will use two types of measures: (1) measures directly related to food web dynamics (i.e., abundances of all and individual trophic classes of invertebrates) and (2) measures that assess shifts or losses in biodiversity. The first approach is useful in understanding if trophic-level attributes of invertebrate assemblages are affected by treatments. Such measures can inform us of the food available to higher trophic levels both on site (e.g., Murphy and Hall 1981; Murphy *et al.* 1981; Hawkins *et al.* 1983) and to downstream fish bearing reaches (e.g., Wipfli and Gregovich 2002; Wipfli and Baxter 2010). However, measures of overall abundance often are not sensitive to species replacements or changes in biodiversity. We will therefore also calculate both the change in compositional similarity and the proportion of taxa lost or gained that occurs between basins and reaches following treatment. Ideally, we would also calculate the indices of biological condition used by Washington Department of Ecology to assess the aquatic life status of invertebrate assemblages – e.g., indices of taxonomic completeness or multimetric indices (e.g., Hawkins 2006; Hawkins *et al.* 2000, 2010; Stoddard *et al.* 2008, Schoolmaster 2012), but these indices have not yet been developed for either eastern Washington streams or small headwater streams.

Sampling reaches within each basin will allow us to conduct two types of analyses. First, we can test for overall riparian buffer treatment effects on invertebrates (e.g., abundance, composition), detritus, and periphyton in two ways: (1) by determining if invertebrates and their food sources collected from a standard reach type differ with treatment and (2) by determining if the same attributes weighted by the proportion of different reach types within a basin differ with treatment. This approach will help assess the effects of within-basin environmental heterogeneity on treatment comparisons. Second, we will use Random Forest models (Cutler *et al.* 2007, Hawkins *et al.* 2010) to determine how reach-level biotic attributes vary in response to environmental differences at both the basin scale (buffer treatments, naturally occurring differences in basin geology, climate, and nutrients) and at the reach scale (shade, temperature, channel morphology and substrates, and flow). For invertebrate models, we will also include estimates of detrital and periphyton standing crops as predictor variables. These models will be used to identify the relative importance of different environmental drivers to detritus, periphyton,

and different measures of invertebrate condition (see below). These models will also help identify interactions between naturally occurring and management-related environmental conditions that may produce contingency in biological responses to forest practices and confound inferences.

We will also use taxon- and stressor-specific ‘tolerance’ values to assess if the macroinvertebrate assemblages in treatment reaches and basins are responding to specific types of environmental alterations. For example, freshwater species vary markedly in their temperature preferences and tolerances, and thermal preferences for benthic macroinvertebrates are relatively well established (Brandt 2001, Huff *et al.* 2005, Carlisle *et al.* 2007). These data can be used to calculate an index of temperature-caused biological alteration. The difference between the mean temperature optima of species observed at a water body and the mean temperature optima of species expected under baseline (or control) conditions represents an assemblage-wide index of thermal-caused ecological change associated with forest practices. To create a temperature sensitive index of change (O/E_{temp}) in the ecological community, we weight taxon abundances at both the treatment (O) and control (E = expected) sites by each taxon’s thermal optima, i.e., $O/E_{temp} = \sum(O_i * t_i) / \sum(E_i * t_i)$, where O_i = the abundance of taxon i in treatment reaches and E_i = abundance of taxon i in control reaches, and t_i = the temperature optimum of taxon i . This approach is being developed for causal analysis purposes in bioassessment (e.g., Yuan 2006) and should be generally suitable for use in detecting effects of thermal alteration. The same approach can be used to estimate indices for other stressors for which we have tolerance values – e.g., fine sediment (Reylea *et al.* 2012, Extence *et al.* 2013, Glendell *et al.* 2014, Murphy *et al.* 2015).

References

- Adams, K. 2012. Standard operating procedures and minimum requirements for the collection of freshwater benthic macroinvertebrate data in wadeable streams and rivers. Washington State Department of Ecology, Environmental Assessment Program. Document EAP073.
- Aich, V., Zimmermann, A., and Elsenbeer, H., 2014, Quantification and interpretation of suspended-sediment discharge hysteresis patterns: How much data do we need?: *Catena*, v. 122, p. 120-129.
- Alila, Y., Kura, P. K., M. Schnorbus and R. Hudson. 2009. Forests and floods: A new paradigm sheds light on age-old controversies. *Water Resources Research* 45(8):W08416.
- Anderson, D.R. 2008. Model Based Inference in the Life Sciences: A Primer on Evidence. Springer Science, New York, NY.
- Arrigoni, A. S., Poole, G. C., Mertes, L. A. K., O'Daniel, S. J., Woessner, W. W., & Thomas, S. A. 2008. Buffered, lagged, or cooled? Disentangling hyporheic influences on temperature cycles in stream channels. *Water Resources Research*, 44, W09418.
- Banks, J. L., J. Li, and A. T. Herlihy. 2007. Influence of clearcut logging, flow duration, and season on emergent aquatic insects in headwater streams of the Central Oregon Coast Range. *Journal of the North American Benthological Society*, 26:620-632.
- Beechie, T.J. 1998. Rates and pathways of recovery for sediment supply and woody debris recruitment in northwestern Washington streams, and implications for salmonid habitat restoration. Ph.D., University of Washington, Seattle. 199 pp.
- Berris, S. N. and R. D. Harr. 1987. Comparative snow accumulation and melt during rainfall in forested and clear-cut plots in the western Cascades of Oregon. *Water Resources Research*, 23(1):135–142.

- Bilby, R.E. and J.W. Ward. 1989. Changes in characteristics and function of woody debris with increasing size of streams in Western Washington. *Transactions of the American Fisheries Society* 118:368-378.
- Bladon, K. D., N. A. Cook, J. T. Light, and C. Segura. 2016. A catchment-scale assessment of stream temperature response to contemporary forest harvesting in the Oregon Coast Range. *Forest Ecology and Management* 379:153-164.
- Bosch, J.M. and J.D. Hewlett. 1982. A review of catchment experiments to determine the effect of vegetation changes on water yield and evapotranspiration. *Journal of Hydrology* 55(1-4):3-23.
- Brandt, Darren. 2001. Temperature preferences and tolerances for 137 common Idaho macroinvertebrate taxa. Idaho Department of Environmental Quality. Coeur d'Alene, ID.
- Brazier, J.R. and G.W. Brown. 1973. Buffer Strips for Stream Temperature Control. Oregon State Forest Research Laboratory, Corvallis, Oregon.
- Brosfokske, K.D., J. Chen, R.J. Naiman and J.F. Franklin. 1997. Harvesting Effects on Microclimatic Gradients from Small Streams to Uplands in Western Washington. *Ecological Applications* 7(4):1188-1200.
- Brown, A.E., L. Zhang, T.A. McMahon, A.W. Western and R.A. Vertessy. 2005. A review of paired catchment studies for determining changes in water yield resulting from alterations in vegetation. *Journal of Hydrology* 310(1-4):28-61.
- Brown, A. V., Y. Aguila, K. B. Brown, and W. P. Fowler. 1997. Responses of benthic macroinvertebrates in small intermittent streams to silvicultural practices. *Hydrobiologia* 347:119-125.
- Brown, G.W. 1969. Predicting Temperatures of Small Streams. *Water Resources Research* 5(1):68-75.
- Brown, G. W. and J. T. Krygier. 1970. Effects of Clear-Cutting on Stream Temperature. *Water Resources Research* 6:1133-1139.
- Buffington, J.M. and D.R. Montgomery. 1999. Effects of hydraulic roughness on surface textures of gravel-bed rivers. *Water Resources Research* 35(11):3507-3521.
- Bywater-Reyes, S., Segura, C., and Bladon, K. D., 2017, Geology and geomorphology control suspended sediment yield and modulate increases following timber harvest in temperate headwater streams: *Journal of Hydrology*, v. 548, p. 754-769.
- Caissie, D., M.G. Satish and N. El-Jabi. 2007. Predicting water temperatures using a deterministic model: Application on Miramichi River catchments (New Brunswick, Canada). *Journal of Hydrology* 336(3-4):303-315.
- Campbell, I.C. and T. J. Doeg. 1989. Impact of timber harvesting and production on streams: a review. *Marine and Freshwater Research*. 40:519-539.
- Carim, K. J., T. Padgett-Stewart, T. M. Wilcox, M.K. Young, K.S. McKelvey, and M.K. Schwartz. 2015. Protocol for collecting eDNA samples from streams. U.S.D.A. Forest Service, National Genomics Center for Wildlife and Fish Conservation. V2.3 (July 2015).
- Carlisle, D. M., M. R. Meador, S. R., Moulton II, and P. M. Ruhl 2007. Estimation and application of indicator values for common macroinvertebrate genera and families of the United States. *Ecological Indicators* 7:22-33.
- Carlisle, D. M., M. R. Meador, T. M. Short, C. M. Tate, M. E. Gurtz, W. L. Bryant, J. A. Falcone, and M. D. Woodside. 2013. The quality of our Nation's waters--ecological health in the Nation's streams, 1993-2005. 2330-5703, US Geological Survey.
- Carlson, J. Y., C. W. Andrus, and H. A. Froehlich. 1990. Woody debris, channel features, and macroinvertebrates of streams with logged and undisturbed riparian timber in

- northeastern Oregon, USA. *Canadian Journal of Fisheries and Aquatic Sciences* 47:1103-1111.
- Carter, J. L. and V. H. Resh. 2001. After site selection and before data analysis: sampling, sorting, and laboratory procedures used in stream benthic macroinvertebrate monitoring programs by USA state agencies. *Journal of the North American Benthological Society*, 20:658-682.
- Carter, J.L., V. H. Resh, D. M. Rosenberg, and T. B. Reynoldson. 2006. Biomonitoring in North American rivers: a comparison of methods used for benthic macroinvertebrates in Canada and the United States. Pages 203-228 in G. Ziglio, M. Siligardi, and G. Flaim (eds), *Biological Monitoring of Rivers: Applications and Perspectives*. John Wiley and Sons, West Sussex, England.
- CMER, 2014. Fiscal Year 2015 CMER Work Plan. The Cooperative, Monitoring, Evaluation, and Research Committee. Washington State Department of Natural Resources. Olympia, WA.
- Cupp, C.E. and T.J. Lofgren. 2014. Effectiveness of riparian management zone prescriptions in protecting and maintaining shade and water temperature in forested streams of Eastern Washington. Cooperative Monitoring Evaluation and Research Report CMER 02-212. Washington State Forest Practices Adaptive Management Program. Washington Department of Natural Resources, Olympia, WA.
- Cutler, D. R., T. C. Edwards Jr, K. H. Beard, A. Cutler, K. T. Hess, J. Gibson, and J. J. Lawler. 2007. Random forests for classification in ecology. *Ecology* 88:2783-2792.
- Danehy, R.J., C.G. Colson, K.B. Parrett and S.D. Duke. 2005. Patterns and sources of thermal heterogeneity in small mountain streams within a forested setting. *Forest Ecology and Management* 208(1-3):287-302.
- Davies, I. J. 1984. Sampling aquatic insect emergence. Pages 161-227 in J.A. Downing and F. H. Rigler (editors), A manual on methods for the assessment of secondary production in freshwaters. IBP Handbook No. 17. Blackwell Scientific Publications, Oxford, England.
- Davies, P., and M. Nelson. 1994. Relationships between riparian buffer widths and the effects of logging on stream habitat, invertebrate community composition and fish abundance. *Marine and Freshwater Research* 45:1289-1305.
- Deiner, K., Bik, H.M., Mächler, E., Seymour, M., Lacoursière-Roussel, A., Altermatt, F., Creer, S., Bista, I., Lodge, D.M., de Vere, N. and Pfrender, M.E., 2017. Environmental DNA metabarcoding: transforming how we survey animal and plant communities. *Molecular ecology*.
- Dent, L., D. Vick, K. Abraham, S. Schoenholtz and S. Johnson. 2008. Summer Temperature Patterns in Headwater Streams of the Oregon Coast Range. *Journal of the American Water Resources Association* 44(4):803-813.
- DeWalle, D.R. 2010. Modeling Stream Shade: Riparian Buffer Height and Density as Important as Buffer Width. *Journal of the American Water Resources Association* 46(2):323-333.
- Downes, B.J., L.A. Barmuta, P.G. Fairweather, D.P. Faith, M.J. Keough, P.S. Lake, B.D. Mapstone and G.P. Quinn. 2002. *Monitoring ecological impacts: concepts and practice in flowing water*. Cambridge University Press, New York. pp.
- Dunne, T. 2001. A scientific basis for the prediction of cumulative watershed effects. Wildland Resources Center, Berkeley, California.
- Du, E., Link, T. E., Wei, L., and Marshall, J. D. 2016. Evaluating hydrologic effects of spatial and temporal patterns of forest canopy change using numerical modelling. *Hydrological Process.*, 30(2), 217-231. doi:10.1002/hyp.10591

- Ehinger, W. 2015. Type N Experimental Buffer Treatment Project in Hard Rock Lithologies. Unpublished raw data.
- Elbrecht, V., Vamos, E.E., Meissner, K., Aroviita, J. and Leese, F., 2017. Assessing strengths and weaknesses of DNA metabarcoding-based macroinvertebrate identification for routine stream monitoring. *Methods in Ecology and Evolution*. (in press)'
- Ellis, C. R., Pomeroy, J. W., and Link, E. 2013. Modeling increases in snowmelt yield and desynchronization resulting from forest gap-thinning treatments in a northern mountain headwater basin. *Water Resources Research*, 49, 1-14. doi:10.1002/wrcr.20089
- Extence, C.A., R. P. Chadd, J. England, M. J. Dunbar, P. J. Wood, and E. D. Taylor. 2013. The assessment of fine sediment accumulation in rivers using macro-invertebrate community response. *River Research and Applications* 29:17-55.
- Glendell, M., C. Extence, R. Chadd, and R. E. Brazier. 2014. Testing the pressure-specific invertebrate index (PSI) as a tool for determining ecologically relevant targets for reducing sedimentation in streams. *Freshwater Biology* 59(2):353-367.
- Gomi, T., R.D. Moore and A.S. Dhakal. 2006. Headwater stream temperature response to clear-cut harvesting with different riparian treatments, coastal British Columbia, Canada. *Water Resour. Res.* 42(8):W08437.
- Gomi, T., R.C. Sidle, M.D. Bryant and R.D. Woodsmith. 2001. The characteristics of woody debris and sediment distribution in headwater streams, southeastern Alaska. *Canadian Journal of Forest Research* 31:1386-1399.
- Gooseff, M.N., S.M. Wondzell, R. Haggerty and J. Anderson. 2003. Comparing transient storage modeling and residence time distribution (RTD) analysis in geomorphically varied reaches in the Lookout Creek basin, Oregon, USA. *Advances in Water Resources* 26(9):925-937.
- Grant, G.E. and A.L. Wolff. 1991. Long-term patterns of sediment transport after timber harvest, western Cascade Mountains, Oregon, USA. Pages 31-40 in Peters, N.E. and D.E. Walling (eds.), *Sediment and Stream Water Quality in a Changing Environment*. International Association of Hydrological Sciences.
- Green, K.C. and Y. Alila. 2012. A paradigm shift in understanding and quantifying the effects of forest harvesting on floods in snow environments. *Water Resour. Res.* 48(10):W10503.
- Gregory, S. V., F. J. Swanson, W. A. McKee, and K. W. Cummins. 1991. An ecosystem perspective of riparian zones. *BioScience* 41:540-551.
- Gravelle, J. A. and T. E. Link. 2007. Influence of Timber Harvesting on Headwater Peak Stream Temperatures in a Northern Idaho Watershed. *Forest Science* 53:189-205.
- Grizzel, J.D. and N. Wolff. 1998. Occurrence of windthrow in forest buffer strips and its effect on small streams in northwest Washington. *Northwest Science* 72(3):214-223.
- Groom, J.D., L. Dent, L.J. Madsen and J. Fleuret. 2011. Response of western Oregon (USA) stream temperatures to contemporary forest management. *Forest Ecology and Management* 262(8):1618-1629.
- Hannah, D.M., I.A. Malcolm, C. Soulsby and A.F. Youngson. 2004. Heat exchanges and temperatures within a salmon spawning stream in the Cairngorms, Scotland: Seasonal and sub-seasonal dynamics. *River Research and Applications* 20(6):635-652.
- Harr, R.D. 1983. Potential for augmenting water yield through forest practices in western Washington and western Oregon. *Journal of the American Water Resources Association* 19(3):383-393.

- Harr, R.D. 1986. Effects of Clearcutting on Rain-on-Snow Runoff in Western Oregon: A New Look at Old Studies. *Water Resources Research* 22(7):1095-1100.
- Harr, R.D., R.L. Fredriksen and J. Rothacher. 1979. Changes in streamflow following timber harvest in southwestern Oregon. Res. Pap. PNW-RP-249.
- Harr, R.D., W.C. Harper, J.T. Krygier and F.S. Hsieh. 1975. Changes in storm hydrographs after road building and clear-cutting in the Oregon Coast Range. *Water Resources Research* 11(3):436-444.
- Harr, R.D., A. Levno and R. Mersereau. 1982. Streamflow changes after logging 130-year-old Douglas fir in two small watersheds. *Water Resources Research* 18(3):637-644.
- Harris, D.D. 1977. Hydrologic changes after logging in two small Oregon coastal watersheds. Water-Supply Paper 2037.
- Harris, R.R., S.D. Kocher, J.M. Gerstein and C. Olson. 2005. Monitoring the Effectiveness of Riparian Vegetation Restoration. University of California, Center for Forestry, Berkeley, CA. 33 pp.
- Hassan, M.A., M. Church, T.E. Lisle, F. Brardinoni, L. Benda and G.E. Grant. 2005. Sediment transport and channel morphology of small, forested streams. *Journal of the American Water Resources Association* 41(4):853-876.
- Hawkins, C. P. 2006. Quantifying biological integrity by taxonomic completeness: its utility in regional and global assessments. *Ecological Applications* 16:1277-1294.
- Hawkins, C. P., Y. Cao, and B. Roper. 2010. Method of predicting reference condition biota affects the performance and interpretation of ecological indices. *Freshwater Biology* 55:1066-1085.
- Hawkins, C. P., J. N. Hogue, L. M. Decker, and J. W. Feminella. 1997. Channel morphology, water temperature, and assemblage structure of stream insects. *Journal of the North American Benthological Society* 16:728-749.
- Hawkins, C. P., M. L. Murphy, and N. Anderson. 1982. Effects of canopy, substrate composition, and gradient on the structure of macroinvertebrate communities in Cascade Range streams of Oregon. *Ecology* 63:1840-1856.
- Hawkins, C. P., M. L. Murphy, N. Anderson, and M. A. Wilzbach. 1983. Density of fish and salamanders in relation to riparian canopy and physical habitat in streams of the northwestern United States. *Canadian Journal of Fisheries and Aquatic Sciences* 40:1173-1185.
- Hawkins, C. P., H. Mykrä, J. Oksanen, and J. J. Vander Laan. 2015. Environmental disturbance can increase beta diversity of stream macroinvertebrate assemblages. *Global Ecology and Biogeography* 24:483-494.
- Hawkins C. P., R. H. Norris, J. N. Hogue, and J.W. Feminella. 2000. Development and evaluation of predictive models for measuring the biological integrity of streams. *Ecological Applications* 10:1456-1477.
- Herbst D. B. and E. L. Silldorff. 2006. Comparison of the performance of different bioassessment methods: similar evaluations of biotic integrity from separate programs and procedures. *Journal of the North American Benthological Society* 25:513-530.
- Hering D., C. K. Feld, O. Moog, and T. Ofenböck. 2006. Cook book for the development of a Multimetric Index for biological condition of aquatic ecosystems: experiences from the European AQEM and STAR projects and related initiatives. *Hydrobiologia* 566:311-324.
- Hernandez, O., R. Merritt, and M. Wipfli. 2005. Benthic invertebrate community structure is influenced by forest succession after clearcut logging in southeastern Alaska. *Hydrobiologia* 533:45-59.

- Hetherington, E.D. 1982. A first look at logging effects on the hydrologic regime of Carnation Creek Experimental Watershed. Pages 45–63 in Hartman, G.F. (ed.) *Proceedings of the Carnation Creek Workshop, a 10 Year Review* Malaspina College, Nanaimo, British Columbia.
- Hicks, B.J., R.L. Beschta and R.D. Harr. 1991. Long-Term Changes in Streamflow Following Logging in Western Oregon and Associated Fisheries Implications. *Water Resources Bulletin* 27(2):217-226.
- Hubbart, J. A., T. E. Link, J. A. Gravelle, and W. J. Elliot. 2007. Timber Harvest Impacts on Water Yield in the Continental/Maritime Hydroclimatic Region of the United States. *Forest Science* 53:169-180.
- Hubler, S., Huff, D.D., Edwards, P. and Pan, Y., 2016. The Biological Sediment Tolerance Index: Assessing fine sediments conditions in Oregon streams using macroinvertebrates. *Ecological Indicators*, 67, pp.132-145.
- Huff, D. D., S. L. Hubler and A. N. Borisenko. 2005. Using field data to estimate the thermal niche of aquatic vertebrates. *North American Journal of Fisheries Management* 25:346-360.
- Huff, D. D., S. L. Hubler, Y. Pan, and D. L. Drake. 2008. Detecting Shifts in Macroinvertebrate Assemblage Requirements: Implicating Causes of Impairment in Streams. DEQ06-LAB-0068-TR (version 1.1), Web publication number: 10-LAB-005. Oregon Department of Environmental Quality, Portland, Oregon.
- Jackson, C.R. and C.A. Sturm. 2002. Woody debris and channel morphology in first- and second-order forested channels in Washington's coast ranges. *Water Resources Research* 38(9):10.1029/2001WR001138.
- Jackson, C.R., C.A. Sturm and J.M. Ward. 2001. Timber harvest impacts on small headwater stream channels in the coast ranges of Washington. *Journal of the American Water Resources Association* 37(6):1533-1549.
- Janisch, J.E., S.M. Wondzell and W.J. Ehinger. 2012. Headwater stream temperature: Interpreting response after logging, with and without riparian buffers, Washington, USA. *Forest Ecology and Management* 270(0):302-313.
- Johnson, A.C., R.T. Edwards and R. Erhardt. 2007. Ground-water response to forest harvest: Implications for hillslope stability. *Journal of the American Water Resources Association* 43(1):134-147.
- Johnson, S.L. 2004. Factors influencing stream temperatures in small streams: substrate effects and a shading experiment. *Canadian Journal of Fisheries & Aquatic Sciences* 61(6):913-923.
- Johnson, S.L. and J.A. Jones. 2000. Stream temperature responses to forest harvest and debris flows in western Cascades, Oregon. *Canadian Journal of Fisheries and Aquatic Science* 57(Suppl. 2), 30-39.
- Jones, J.A. and D.A. Post. 2004. Seasonal and successional streamflow response to forest cutting and regrowth in the northwest and eastern United States. *Water Resources Research* 40(5).
- Kaufmann, P. R., P. Levine, E. G. Robison, C. Seeliger, and D. V. Peck. Quantifying Physical Habitat in Streams. *US Environmental Protection Division, Office of Research and Development, Washington, DC. EPA/620/R-99/003, 1999.*
- Kaufmann, P.R., D.P. Larsen and J.M. Faustini. 2009. Bed Stability and Sedimentation Associated With Human Disturbances in Pacific Northwest Streams. *JAWRA Journal of the American Water Resources Association* 45(2):434-459.

- Keefe, R., T. E. Link, P. Dunnette, R. Becker, and A. Fennema. 2015. Monitoring the effectiveness of Idaho's Class I Stream Shade Rule: Experimental Design. unpublished document prepared for Idaho Department of Environmental Quality (IDEQ), 37 pp.
- Keim, R.F. and A.E. Skaugset. 2003. Modelling effects of forest canopies on slope stability. *Hydrological Processes* 17(7):1457-1467.
- Kibler, K. M., A. Skaugset, L. M. Ganio, and M. M. Huso. 2013. Effect of contemporary forest harvesting practices on headwater stream temperatures: Initial response of the Hinkle Creek catchment, Pacific Northwest, USA. *Forest Ecology and Management* 310:680-691.
- Kiffney, P. M., J. S. Richardson, and J. P. Bull. 2003. Responses of periphyton and insects to experimental manipulation of riparian buffer width along forest streams. *Journal of Applied Ecology* 40:1060-1076.
- Klos, P. Z., & Link, T. E. 2018. Quantifying shortwave and longwave radiation inputs to headwater streams under differing canopy structures. *Forest Ecology and Management*, 407, 116-124. doi:10.1016/j.foreco.2017.10.046
- Konrad, C., A. Brasher, and J. May. 2008. Assessing streamflow characteristics as limiting factors on benthic invertebrate assemblages in streams across the western United States. *Freshwater Biology* 53:1983-1998.
- Kruschke, J., 2015, Doing Bayesian analysis: A tutorial with R, Jags, and STAN Edition 2, Amsterdam: Elsevier, p. 759.
- Kuras, P.K., Y. Alila and M. Weiler. 2012. Forest harvesting effects on the magnitude and frequency of peak flows can increase with return period. *Water Resour. Res.* 48(1):W01544.
- Kurylyk1, B.L., K. T. B. MacQuarrie, D. Caissie, and J. M. McKenzie. 2014. Shallow groundwater thermal sensitivity to climate change and land cover disturbances: derivation of analytical expressions and implications for stream temperature modeling. *Hydrol. Earth Syst. Sci.* 19:2469–2489.
- Leach, J.A. and R.D. Moore. 2010. Stream temperature dynamics in two hydrogeomorphically distinct reaches. *Hydrological Processes*:n/a-n/a.
- Leibowitz, S. G., Comeleo, R. L., Wigington, P. J., Weber, M. H., Sproles, E. A., and Sawicz, K. A., 2016, Hydrologic Landscape Characterization for the Pacific Northwest, USA: *JAWRA Journal of the American Water Resources Association*, v. 52, no. 2, p. 473-493.
- Lewis, J., R.E. Eads and Pacific Southwest Research Station. 2009. Implementation guide for turbidity threshold sampling principles, procedures, and analysis. Page 1 online resource (87 p.) General technical report PSW-GTR 212. U.S. Dept. of Agriculture, Forest Service, Pacific Southwest Research Station, Albany, CA.
- Lewis, J., S.R. Mori, E.T. Keppeler and R.R. Ziemer. 2001. Impacts of logging on storm peak flows, flow volumes and suspended sediment loads in Caspar Creek, California. Pages 85-125 in Wigmosta, M.S. and S.J. Burges (eds.), *Land Use and Watersheds: Human Influence on Hydrology and Geomorphology in Urban and Forest Areas*. American Geophysical Union, Washington, D.C.
- Litschert, S.E. and L.H. MacDonald. 2009. Frequency and characteristics of sediment delivery pathways from forest harvest units to streams. *Forest Ecology and Management* 259(2):143-150.
- Marks, D., Kimball, J., Tingey, D., and Link, T. E. 1998. The sensitivity of snowmelt processes to climate conditions and forest cover during rain-on-snow: A case study of the 1996 Pacific Northwest flood. *Hydrological Processes*, 12, 1569-1587.

- Maxa, M.A. 2009. Headwater stream sediment storage in relation to in-stream woody debris and forest management practices in southwestern Washington. M.S., University of Washington, Seattle, WA. 113 pp.
- McElreath, R., 2016, *Statistical Rethinking*. Texts in Statistical Science, Boca Raton, FL. CRC Press, p. 469.
- McGreer, D., M. Bonoff, J. Gravelle, D. Schult, and S. Canavan. 2012. Evaluation of the Effectiveness of the Current TFW Shade Methodology for Measuring Attenuation of Solar Radiation to the Stream. Cooperative Monitoring Evaluation and Research Report CMER 02-214. Washington Department of Natural Resources, Olympia, WA.
- McIntyre, A.P., M.P. Hayes, W.J. Ehinger, D. Schuett-Hames, S.M. Estrella, G. Stewart, R.E. Bilby, E.M. Lund, J. Walter, J.E. Jones, R. Ojala-Barbour, F.T. Waterstrat, C.R. Milling, A.J. Kroll, B.R. Fransen, J. Giovanini, S.D. Duke, G. Mackenzie, R. Tarosky, J.G. MacCracken, J. Thronton and T. Quinn. 2017. Effectiveness of Experimental Riparian Buffers on Perennial Non-fish-bearing Streams on Competent Lithologies in Western Washington. Cooperative Monitoring Evaluation and Research Report CMER XX-XXX, Washington State Forest Practices Adaptive Management Program, Washington Department of Natural Resources, Olympia, WA.
- McNamara, J. P., Chandler, D., Seyfried, M., & Achet, S. (2005). Soil moisture states, lateral flow, and streamflow generation in a semi-arid, snowmelt-driven catchment. *Hydrological Processes*, 19, 4023-4038. doi:10.1002/hyp.5869
- Mellon, C. D., M. S. Wipfli, and J. L. Li. 2008. Effects of forest fire on headwater stream macroinvertebrate communities in eastern Washington, USA. *Freshwater Biology* 53:2331-2343.
- Merritt, R. W., K. W. Cummins, and M. B. Berg. 2008. *An Introduction to the Aquatic Insects of North America* (4th edition). Kendal/Hunt Publishing Company, Dubuque, Iowa.
- Meyer, J. L., D. L. Strayer, J. B. Wallace, S. L. Eggert, G. S. Helfman, and N. E. Leonard. 2007. The contribution of headwater streams to biodiversity in river networks. *Journal of the American Water Resources Association* 43:86-103.
- Miller, D., P. Peterson, T. Cardoso. 2015. Forest Hydrology Study. Cooperative Monitoring Evaluation and Monitoring Committee. In Progress.
- Montgomery, D.R. and J.M. Buffington. 1993. Channel classification, prediction of channel response, and assessment of channel condition. Technical Report TFW-SH10-93-002, Washington State Timber Fish and Wildlife, Seattle, Washington.
- Montgomery, D.R. and L.H. MacDonald. 2002. Diagnostic Approach to Stream Channel Assessment and Monitoring. *Journal of the American Water Resources Association* 38(1):1-16.
- Moore, R.D., D.L. Spittlehouse and A. Story. 2005a. Riparian microclimate and stream temperature response to forest harvesting: a review. *Journal of the American Water Resources Association* 41(4):813-834.
- Moore, R.D., P. Sutherland, T. Gomi and A. Dhakal. 2005b. Thermal regime of a headwater stream within a clear-cut, coastal British Columbia, Canada. *Hydrological Processes* 19(13):2591-2608.
- Moore, R.D. and S.M. Wondzell. 2005. Physical hydrology and the effects of forest harvesting in the Pacific Northwest: a review. *Journal of the American Water Resources Association* 41(4):763-784.
- Morin A. Variability of density estimates and the optimization of sampling programs for stream benthos. *Canadian Journal of Fisheries and Aquatic Sciences*. 1985 Sep 1;42(9):1530-4.

- Murphy, J. F., J. I. Jones, J. L. Pretty, C. P. Duerdoth, A. Hawczak, A. Arnold, J. H. Blackburn, P. S. Naden, G. Old, D. A. Sear, D. Hornby, R. T. Clarke, and A. L. Collins. 2015. Development of a biotic index using stream macroinvertebrates to assess stress from deposited fine sediment." *Freshwater Biology* 60:2019-2036.
- Murphy, M. L., and J. D. Hall. 1981. Vaired effects of clear-cut logging on predators and their habitat in small streams of the Cascade Mountains, Oregon. *Canadian Journal of Fisheries and Aquatic Sciences* 38:137-145.
- Murphy, M. L., C. P. Hawkins, and N. Anderson. 1981. Effects of canopy modification and accumulated sediment on stream communities. *Transactions of the American Fisheries Society* 110:469-478.
- Newbold, J., D. Erman, and K. Roby. 1980. Effects of logging on macroinvertebrates in streams with and without buffer strips. *Canadian Journal of Fisheries and Aquatic Sciences* 37:1076-1085.
- Norris, R.H. and Georges, A., 1993. Analysis and interpretation of benthic macroinvertebrate surveys. Freshwater biomonitoring and benthic macroinvertebrates. Chapman and Hall, New York, pp.234-286.
- Parsons, J., D. Hallock, K. Seiders, B. Ward, C. Coffin, E. Newell, C. Deligeannis, and K. Welch. 2012. Standard operating procedures to minimize the spread of invasive species (version 2). Washington State Department of Ecology, Environmental Assessment Program. Document EAP070.
- Paulsen, S. G., A. Mayo, D. V. Peck, J. L. Stoddard, E. Tarquinio, S. M. Holdsworth, J. V. Sickle, L. L. Yuan, C. P. Hawkins, and A. T. Herlihy. 2008. Condition of stream ecosystems in the US: an overview of the first national assessment. *Journal of the North American Benthological Society* 27:812-821.
- Perry, T. D., and Jones, J. A., 2017, Summer streamflow deficits from regenerating Douglas-fir forest in the Pacific Northwest, USA: *Ecohydrology*, v. 10, no. 2, p. e1790-n/a.
- Pinheiro, J.C. and D.M. Bates. 2000. Mixed-effects Models in S and S-PLUS. Statistics and Computing. Springer, New York. 521 pp.
- Pollock, M. M., T. J. Beechie, M. Liermann, and R. E. Bigley. 2009. Stream Temperature Relationships to Forest Harvest in Western Washington. *Journal of the American Water Resources Association* 45:141-156.
- Poole, G.C. and C.H. Berman. 2001. An ecological perspective on in-stream temperature: Natural heat dynamics and mechanisms of human-caused thermal degradation. *Environmental Management* 27(6):787-802.
- PRISM Climate Group, Oregon State University, <http://prism.oregonstate.edu>, created 31 July 2012.
- Quinn, J. M., I. K. Boothroyd, and B. J. Smith. 2004. Riparian buffers mitigate effects of pine plantation logging on New Zealand streams: 2. Invertebrate communities. *Forest Ecology and Management* 191:129-146.
- Reid, D. J., J. M. Quinn, and A. E. Wright-Stow. 2010. Responses of stream macroinvertebrate communities to progressive forest harvesting: influences of harvest intensity, stream size and riparian buffers. *Forest Ecology and Management* 260:1804-1815.
- Reidy Liermann, C.A., J.D. Olden, T.J. Beechie, M.J. Kennard, P.B. Skidmore, C.P. Konrad and H. Imaki. 2012. Hydrogeomorphic classification of Washington State rivers to support emerging environmental flow management strategies. *River Research and Applications* 28(9):1340-1358.

- Relyea, C. D., G. W. Minshall, and R. J. Danahy. 2012. Development and validation of an aquatic fine sediment biotic index. *Environmental Management* 49(1): 242-252.
- Richardson, J. S., and R. J. Danahy. 2007. A synthesis of the ecology of headwater streams and their riparian zones in temperate forests. *Forest Science* 53:131-147.
- Roberts, R.G. and M. Church. 1986. The sediment budget in severely disturbed watersheds, Queen Charlotte Ranges, British Columbia. *Canadian Journal of Forest Research* 16(5):1092-1106.
- Scherer, R.A. 2008. The effects of wildfire disturbance and streamside clearcut harvesting on instream wood and small stream geomorphology in south-central British Columbia. Ph.D., University of British Columbia, Vancouver, British Columbia. 230 pp.
- Schoolmaster, D. R., J. B. Grace, and E. William Schweiger. 2012. A general theory of multimetric indices and their properties. *Methods in Ecology and Evolution* 3:773-781.
- Seyednasrollah, B., & Kumar, M. 2013. Effects of tree morphometry on net snowcover radiation on forest floor for varying vegetation densities. *Journal of Geophysical Research: Atmospheres*, 118, 12,508-12,521. doi:10.1002/2012JD019378
- Shumar, M. and J. de Varona. 2009. The Potential Natural Vegetation (PNV) Temperature Total Maximum Daily Load (TMDL). Idaho Department of Environmental Quality. Boise, Idaho. 359 pp.
- Sidle, R.C. and H. Ochiai. 2006. Landslides : processes, prediction, and land use. American Geophysical Union, Washington, DC. 312 pp.
- Stednick, J.D. 1996. Monitoring the effects of timber harvest on annual water yield. *Journal of Hydrology* 176(1-4):79-95.
- Stoddard, J. L., A. T. Herlihy, D. V. Peck, R. M. Hughes, T. R. Whittier, and E. Tarquinio. 2008. A process for creating multimetric indices for large-scale aquatic surveys. *Journal of the North American Benthological Society* 27:878-891.
- Stonestrom, D.A., and Constantz, J., eds., 2003, Heat as a tool for studying the movement of ground water near streams: U.S. Geological Survey Circular 1260, 96 p. <https://pubs.water.usgs.gov/circ1260>
- Storck, P., D. P. Lettenmaier, and S. M. Bolton. 2002. Measurement of snow interception and canopy effects on snow accumulation and melt in a mountainous maritime climate, Oregon, United States. *Water Resources Research* 38(11), 1223, doi:10.1029/2002WR001281.
- Story, A., R.D. Moore and J.S. Macdonald. 2003. Stream temperatures in two shaded reaches below cutblocks and logging roads: downstream cooling linked to subsurface hydrology. *Canadian Journal of Forest Research* 33(8):1383-1396.
- Subehi, L., T. Fukushima, Y. Onda, S. Mizugaki, T. Gomi, T. Terajima, K.i. Kosugi, S. Hiramatsu, H. Kitahara, K. Kuraji and N. Ozaki. 2009. Influences of forested watershed conditions on fluctuations in stream water temperature with special reference to watershed area and forest type. *Limnology* 10(1):33-45.
- Teply, M., and D. McGreer. 2013. Simulating the Effects of Forest Management on Stream Shade in Central Idaho. *Western Journal of Applied Forestry* 28:37-45.
- Teply, M., D. McGreer and K. Ceder. 2014. Using Simulation Models to Develop Riparian Buffer Strip Prescriptions. *Journal of Forestry* 112(3):302-311.
- Terando, A. J., Youngsteadt, E., Meineke, E. K., & Prado, S. G. 2017. Ad hoc instrumentation methods in ecological studies produce highly biased temperature measurements. *Ecology and Evolution*, 1-15. doi:10.1002/ece3.3499

- Turley, M.D., Bilotta, G.S., Chadd, R.P., Extence, C.A., Brazier, R.E., Burnside, N.G. and Pickwell, A.G., 2016. A sediment-specific family-level biomonitoring tool to identify the impacts of fine sediment in temperate rivers and streams. *Ecological Indicators*, 70, pp.151-165.
- Underwood, A. 1994. On beyond BACI: sampling designs that might reliably detect environmental disturbances. *Ecological Applications* 4(1):3-15.
- Wallace, J.B., J.R. Webster, S.L. Eggert and J.L. Meyer. 2000. Small wood dynamics in a headwater stream. *Verh. Internat. Verin. Limnol.* 27:1361-1365.
- Wallace, J. B., S. L. Eggert, J. L. Meyer, and J. R. Webster. 1997. Multiple trophic levels of a forest stream linked to terrestrial litter inputs. *Science* 277:102-104.
- Washington Forest Practices Board. 2011. Standard Methodology for Conducting Watershed Analysis. Olympia, Washington.
- Watson, F., R. Vertessy, T. McMahon, B. Rhodes and I. Watson. 2001. Improved methods to assess water yield changes from paired-catchment studies: application to the Maroondah catchments. *Forest Ecology and Management* 143(1-3):189-204.
- WDNR, 1999. Forests & Fish Report. Washington State Department of Natural Resources, Olympia, WA. 179 p. Available online at: www.dnr.wa.gov/forestpractices/rules/forestsandfish.pdf
- WDNR, 2001. Washington Forest Practices Rules: WAC 222-30-021. Washington State Department of Natural Resources, Olympia, WA.
- Wemple, B.C. and J.A. Jones. 2003. Runoff production on forest roads in a steep, mountain catchment. *Water Resources Research* 39(8):1220.
- Wemple, B.C., J.A. Jones and G.E. Grant. 1996. Channel network extension by logging roads in two basins, western Cascades, Oregon. *Journal of the American Water Resources Association* 32(6):1195-1207.
- Wilkerson, E., J.M. Hagan, D. Siegel and A.A. Whitman. 2006. The Effectiveness of Different Buffer Widths for Protecting Headwater Stream Temperature in Maine. *Forest Science* 52:221-231.
- Wipfli, M. S. and C. V. Baxter. 2010. Linking ecosystems, food webs, and fish production: subsidies in salmonid watersheds. *Fisheries* 35(8):373-387.
- Wipfli, M. S., and D. P. Gregovich. 2002. Export of invertebrates and detritus from fishless headwater streams in southeastern Alaska: implications for downstream salmonid production. *Freshwater Biology* 47:957-969.
- Wondzell, S.M. 2006. Effect of morphology and discharge on hyporheic exchange flows in two small streams in the Cascade Mountains of Oregon, USA. *Hydrological Processes* 20(2):267-287.
- Woodall, C.W. and V.J. Monleon. 2008. Sampling protocol, estimation, and analysis procedures for the down woody materials indicator of the FIA program. Gen. Tech. Rep. NRS-22. Newtown Square, PA: U.S. Department of Agriculture, Forest Service, Northern Research Station. 68 p
- Yu, D.W., Ji, Y., Emerson, B.C., Wang, X., Ye, C., Yang, C. and Ding, Z., 2012. Biodiversity soup: metabarcoding of arthropods for rapid biodiversity assessment and biomonitoring. *Methods in Ecology and Evolution*, 3(4), pp.613-623.
- Yuan, Lester. 2006. Estimation and application of macroinvertebrate tolerance values. Report No. EPA/600/P-04/116F. National Center for Environmental Assessment, Office of Research and Development, U.S. Environmental Protection Agency, Washington, D.C.

Appendix A: Response to CMER comments on Final Study Design

This appendix is the byproduct of a CMER participant meeting held on March 23, 2018 to document the TWIG's response to CMER's review of the ISPR-approved ENREP Study Design document. It provides information on the history of the project development, consideration of different research approaches, site selection and site grouping process, and directly addresses a set of concerns expressed by one or more CMER voting members at the March 23 meeting. The last section includes a bullet-list of text changes made to the study design in direct response to CMER member suggestions at the March 23 meeting.

Potential research approaches

In November 2013, the initial ENREP Technical Writing and Implementation Group (TWIG) presented the TWF Policy committee a set of research alternatives for the ENREP study. The objectives included quantify the magnitude of change in stream flow, canopy closure, water temperature, suspended sediment transport and wood loading. The potential research approaches included meta-analyses, decision support systems, physically-based modeling, and empirical research. The empirical research section included comparisons of Before-After/Control Impact (BACI) designs, before-after designs, and observational designs. After considering the alternatives and TWIG recommendations, Policy approved moving forward with a watershed-scale BACI study design similar to the two ongoing westside study designs (Hard Rock and Soft Rock) focused on Type Np basins with spatially continuous stream flow (a.k.a., 'wet'); and to collect follow-up information on, and develop a design for, Type Np basins with spatially discontinuous summer surface flow (a.k.a., 'dry').

In November 2016, CMER voted to send the 'wet' study design out for Independent Science Peer Review (ISPR) and in the spring of 2017, a 'dry' TWIG was convened.

Site selection process

In the summer of 2017, just as the 'wet' study design was coming back from ISPR and the 'dry' TWIG was getting started, detailed information about site availability and site conditions became available. ISPR participants had raised several questions and expressed concerns about potential sites, and in the June 6, 2017 video meeting, the TWIG explained that site details were just becoming available and more information would be added once information on summer streamflow permanence was available.

The following images were shared with ISPR on June 6.

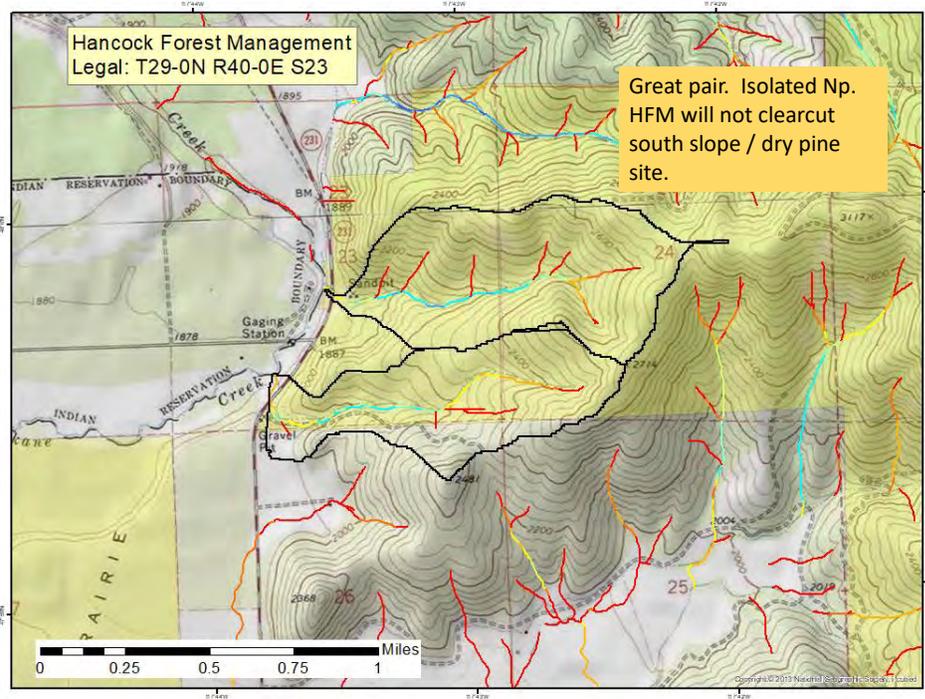


Figure 1: Site selection is tough, but we are finding sites. We had 26 potential N basins and these look like some of the better pairs. The stream layer is the probability of perennial water based from the Forest Hydrology Study (FHS).

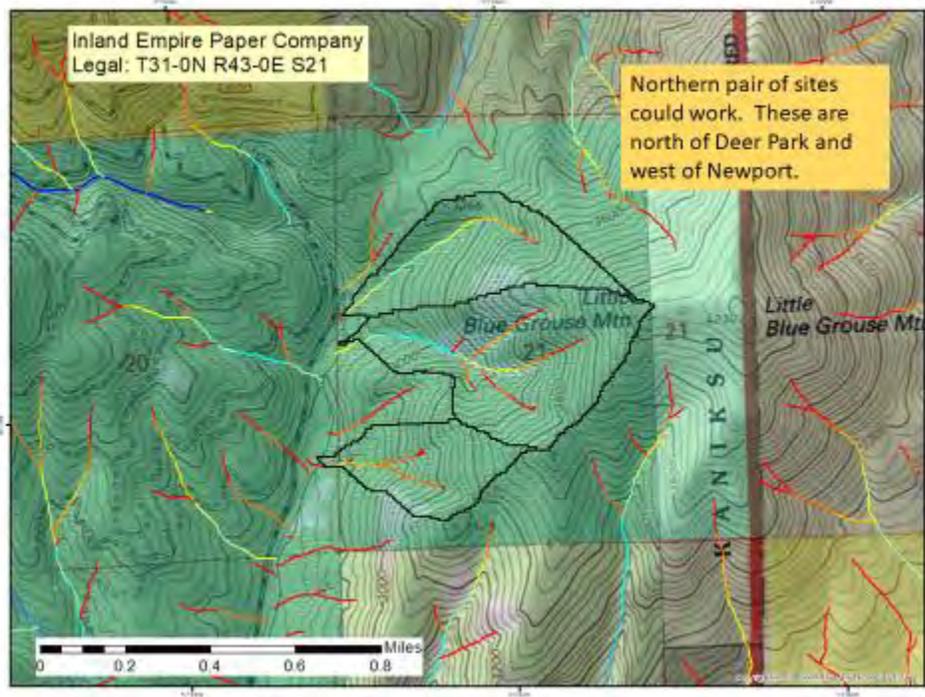


Figure 2: Another potential pair.

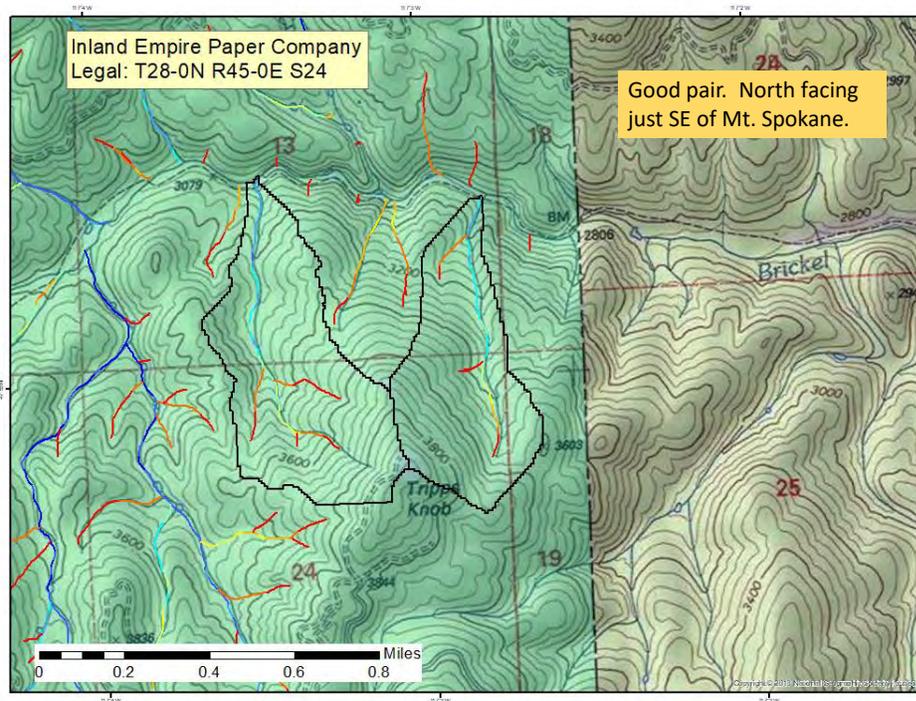


Figure 3: ISPR was told that this site is wetter and that we were seeing a potential gradient in terms of precipitation and summer surface water extent. ISPR were told that we were collecting information on surface water extent and temperature correlations and that those data would be available in September and that we would provide information on how representative candidate sites might be to the area of inference.



In September and October 2017, the ‘wet’ and ‘dry’ TWIGs reviewed available data, visited the 2 driest of the 3 potential sites, and recommended that the two studies be merged. During the October 24, 2017 teleconference between CMER and the TWIGs, CMER approved combining the wet and dry studies based on the understanding that the sites spanned a gradient of hydrologic conditions and that the design could accommodate the range of conditions present across forested landscapes of eastern Washington. CMER directed the TWIG to incorporate elements of the “dry” study plan into the existing “wet” study plan document, continue to work with ISPR to address existing comments, and provide feedback on the revised study plan document. The merged study plan document and completed comment matrix was submitted to the ISPR on December 8, 2017. A teleconference between the TWIG and ISPR was held on January 3, 2018 to discuss the TWIG’s response to the ISPR review, and to discuss remaining minor issues that the ISPR wanted to have resolved prior to approval of the study plan. The final revised ENREP Study Plan was submitted to the ISPR AE on January 18, 2018, and approved by the AE on January 23, 2018 with the statement from the AE that “this revised document constructively and cogently addresses all of the concerns raised in review and that were subsequently identified as important in conference call discussions”.

The following slides were part of the September TWIG discussion and were shown to the Scientific Advisory Group Eastside (SAGE).



We can't recall whether any of these slides were shown on a Jan 3, 2018 video conference with ISPR. The purpose of that video conference was for ISPR to indicate where additional edits were warranted prior to formal approval of the study design. If these slides were shared with ISPR, they may have affected ISPR's opinion of the study design document, so they are incorporated here as part of the formal record.



Figure 4: These are the sites we have.

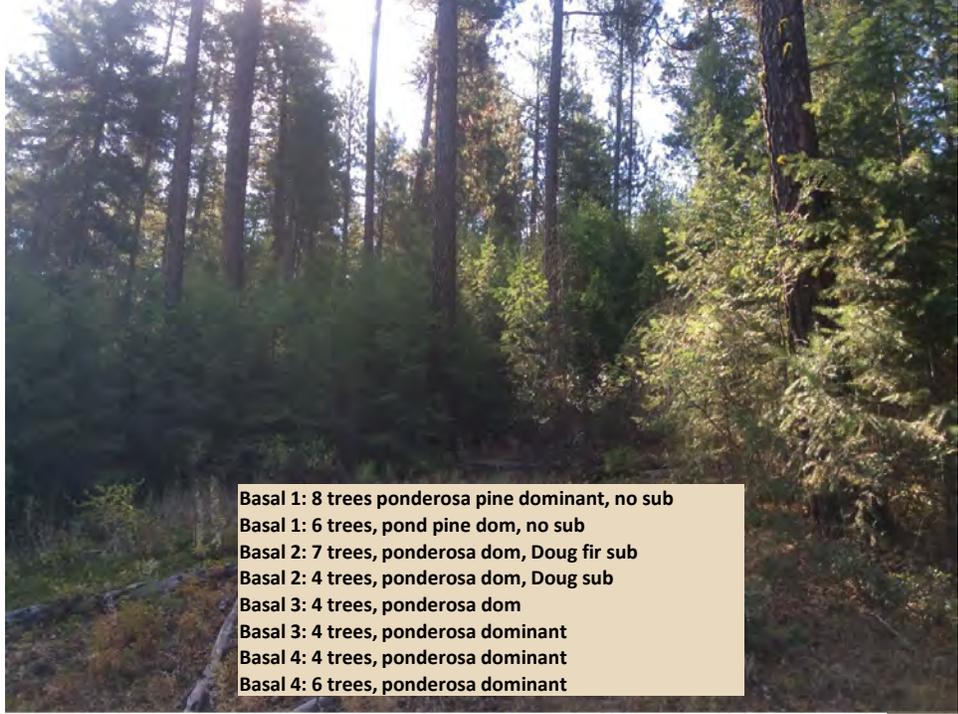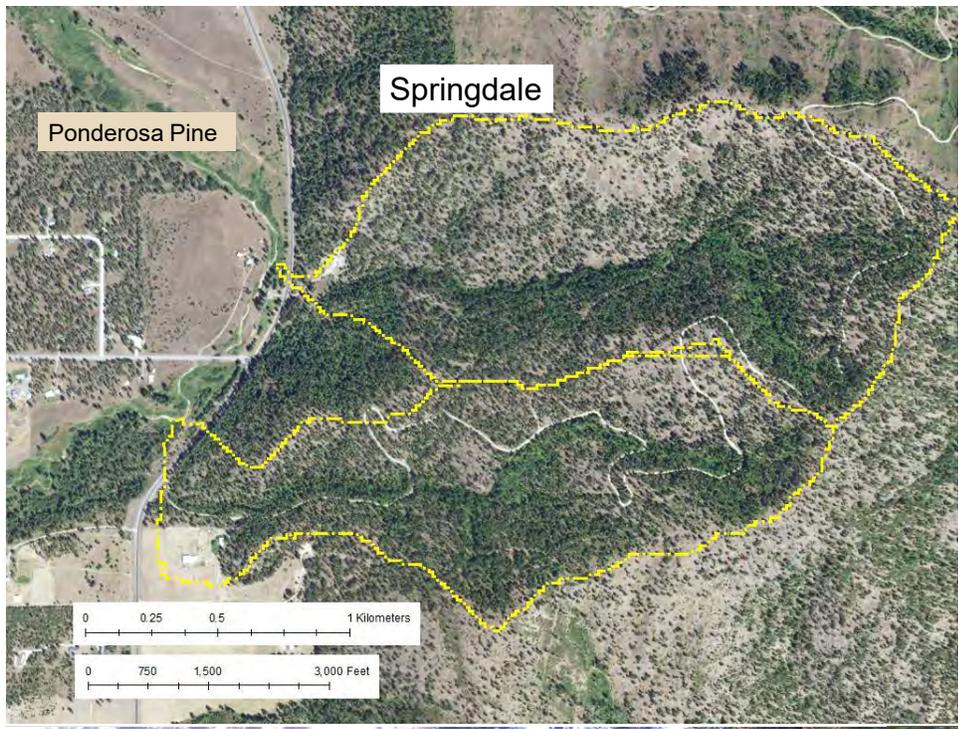

Springdale is a relatively dry site dominated by ponderosa pine.

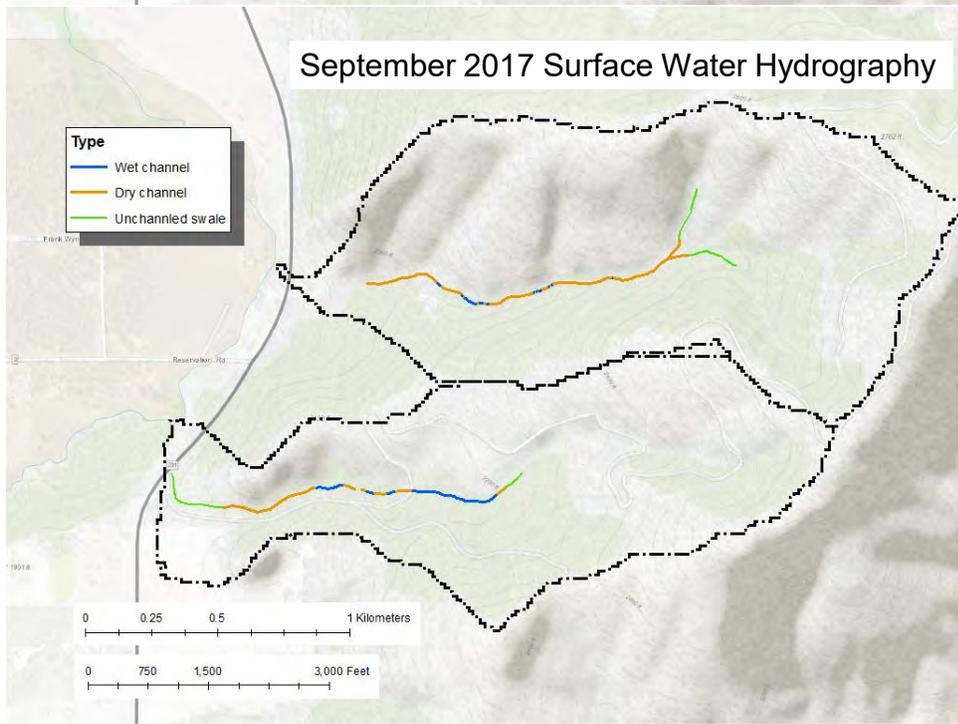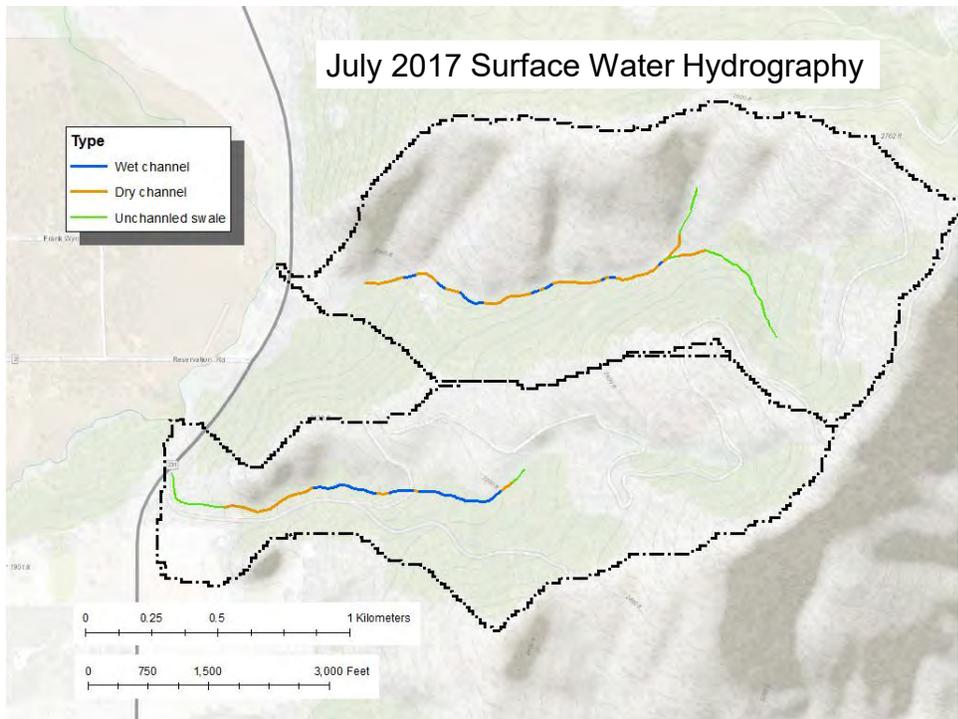


Stream hydrology was surveyed in July and September 2017. The northern basin would be the treatment and we would clearcut approximately 50% of the reaches that were classified as Np in July.

July	Springdale_N		Springdale_S	
	Length (ft)	Proportion	Length (ft)	Proportion
DryChan	2460	77%	1055	41%
WetChan	723	23%	1492	59%
Grand Total	3183		2547	

September	Springdale_N		Springdale_S	
	Length (ft)	Proportion	Length (ft)	Proportion
DryChan	2717	88%	1345	55%
WetChan	366	12%	1113	45%
Grand Total	3084		2458	

Mid-July to Mid-Sept	Springdale_N	Springdale_S
Dried up between surveys (ft)	390	393

Length is probably slightly underestimated because it only includes reaches mapped as either dry or wet in both surveys.

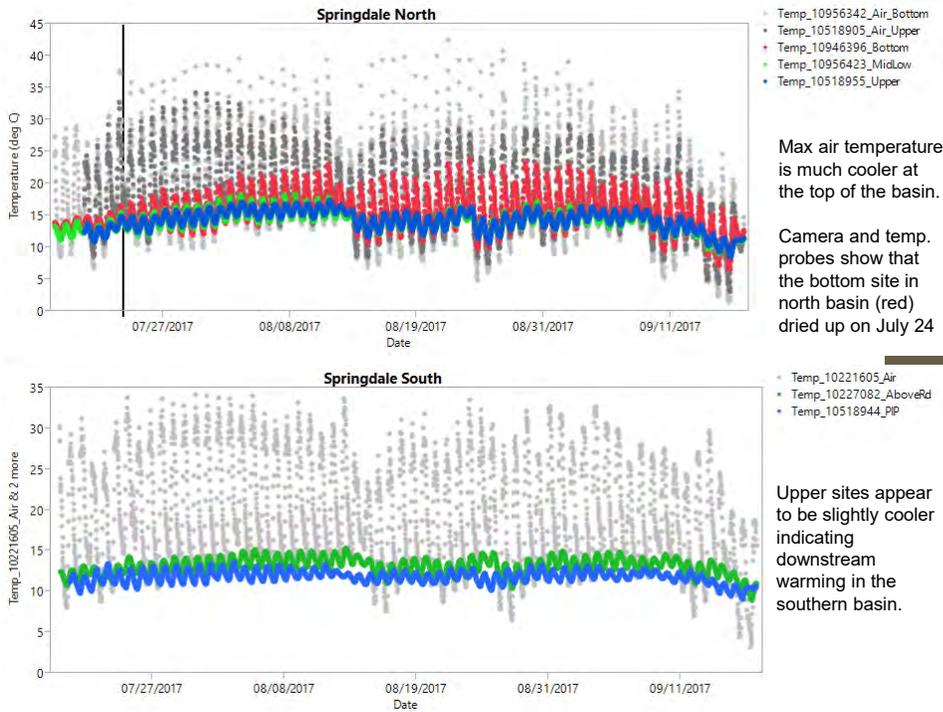



This shows both the length of dry and wet channel and change in condition. Temperature data were used to make sure the basins had similar pre-treatment temperature profiles.

Correlations


	Temp_N_10956423_MidLow	Temp_N_10518955_Upper	Temp_South_10518944_Upper	Temp_South_10227082_Middle
Temp_N_10956423_MidLow	1.0000	0.9642	0.9306	0.9718
Temp_N_10518955_Upper	0.9642	1.0000	0.8861	0.9615
Temp_South_10518944_Upper	0.9306	0.8861	1.0000	0.9586
Temp_South_10227082_Middle	0.9718	0.9615	0.9586	1.0000

There are 50 missing values. The correlations are estimated by REML method.



Scatterplot Matrix

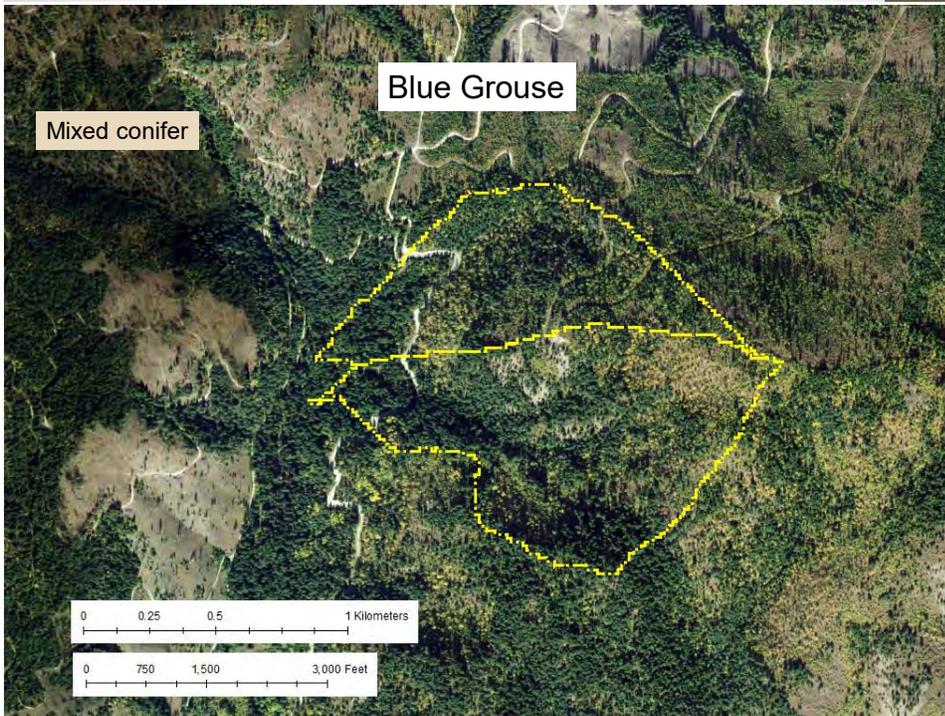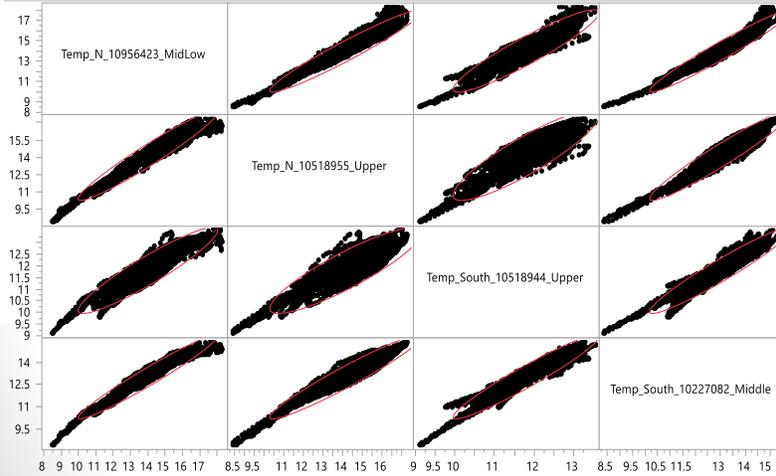

Top graph shows that temperature within and between sites is strongly correlated. The next site is Blue Grouse.

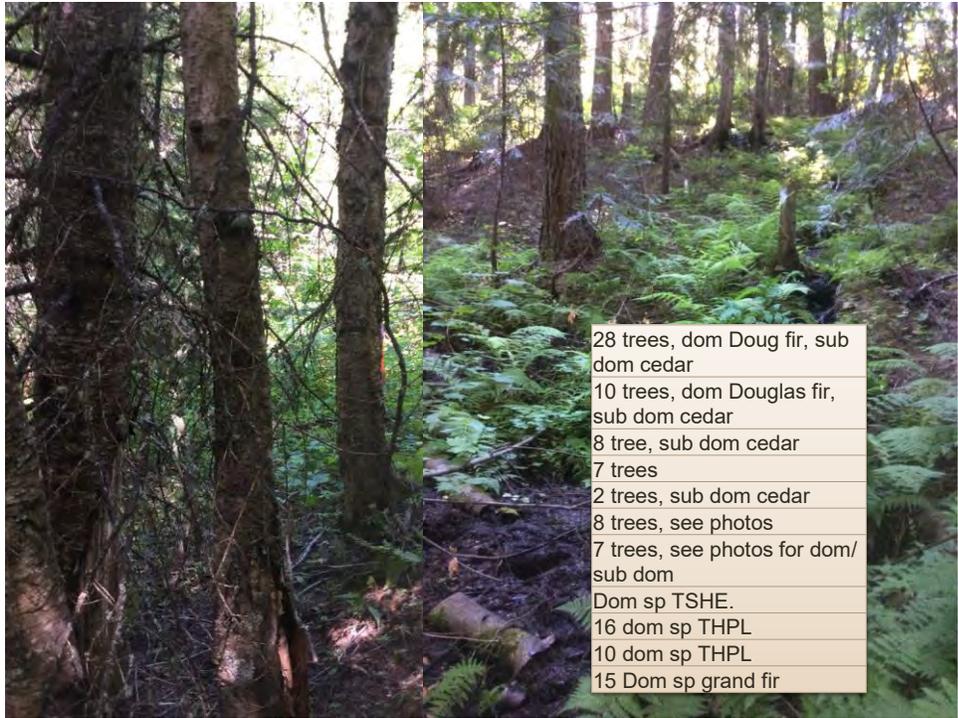

Blue Grouse is a true mixed conifer site.

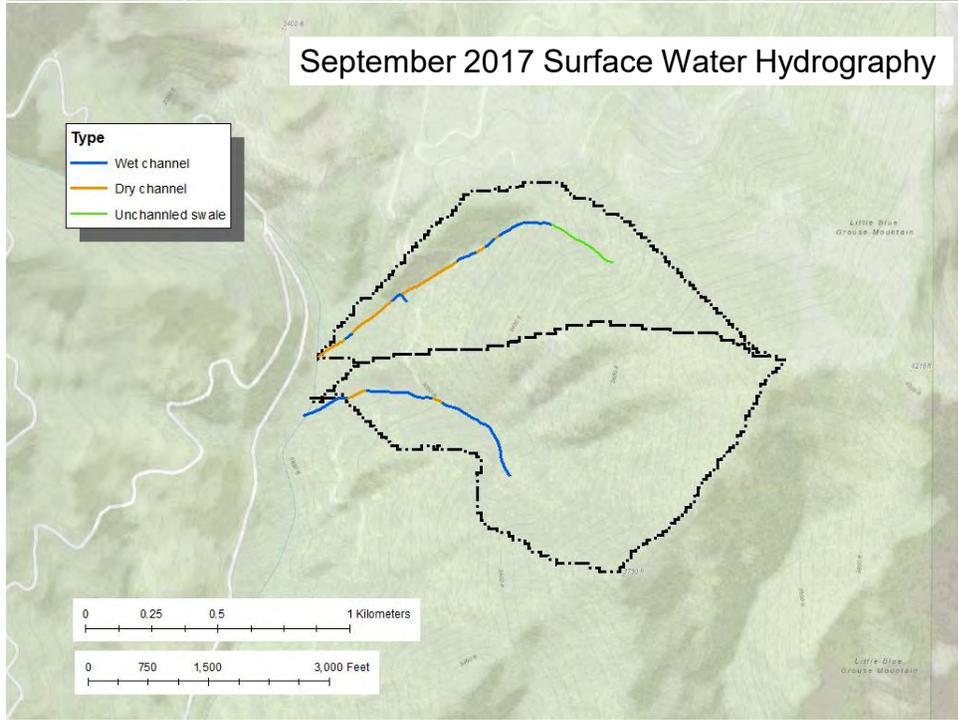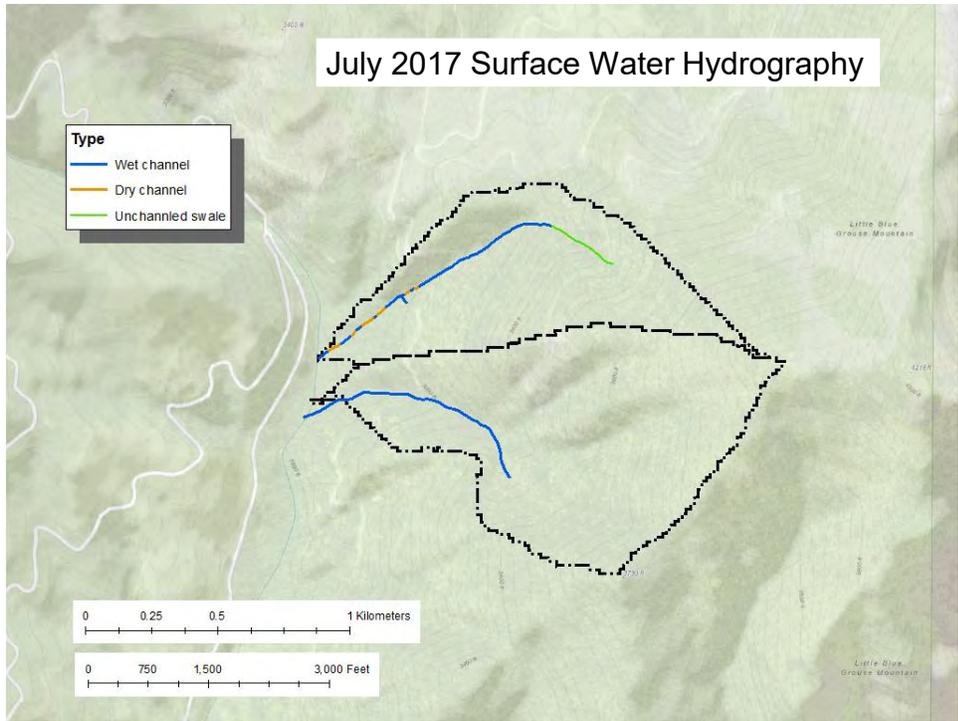


Both basins were largely wet in July, but by September the lower half of the northern basin was dominated by dry stream channel. The northern basin would be the treatment and at least 50% of the September dry reach would be clearcut harvested.

July	BlueGrouse_N		BlueGrouse_S	
	Length (ft)	Proportion	Length (ft)	Proportion
DryChan	490	21%	0	0%
WetChan	1878	79%	2115	100%
Grand Total	2368		2115	


September	BlueGrouse_N		BlueGrouse_S	
	Length (ft)	Proportion	Length (ft)	Proportion
DryChan	1359	54%	263	12%
WetChan	1175	46%	1853	88%
Grand Total	2534		2115	

Mid-July to Mid-Sept	BlueGrouse_N	BlueGrouse_S
Mapped wet and then dry	877	263

Length is probably slightly underestimated because it only includes reaches mapped as either dry or wet in both surveys.

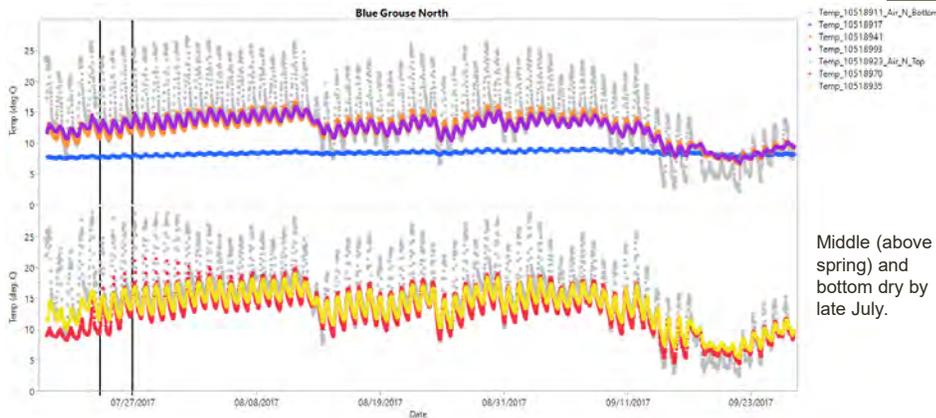

Middle (above spring) and bottom dry by late July.

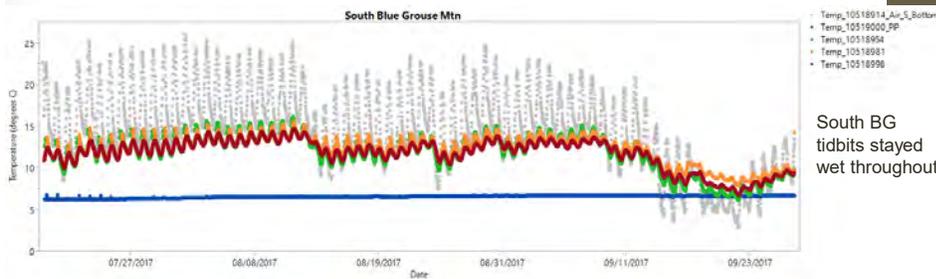



South BG tidbits stayed wet throughout.

Blue Grouse Water Temperature Correlations (excluding PIP and dry probes)


	Temp_N_10518941_Upper	Temp_N_10518993_LowMid	Temp_S_10518981_Mid	Temp_S_10518998_Bottom
Temp_N_10518941_Upper	1.0000	0.9645	0.9785	0.9593
Temp_N_10518993_LowMid	0.9645	1.0000	0.9778	0.9928
Temp_S_10518981_Mid	0.9785	0.9778	1.0000	0.9784
Temp_S_10518998_Bottom	0.9593	0.9928	0.9784	1.0000

There are 8 missing values. The correlations are estimated by REML method.

Scatterplot Matrix

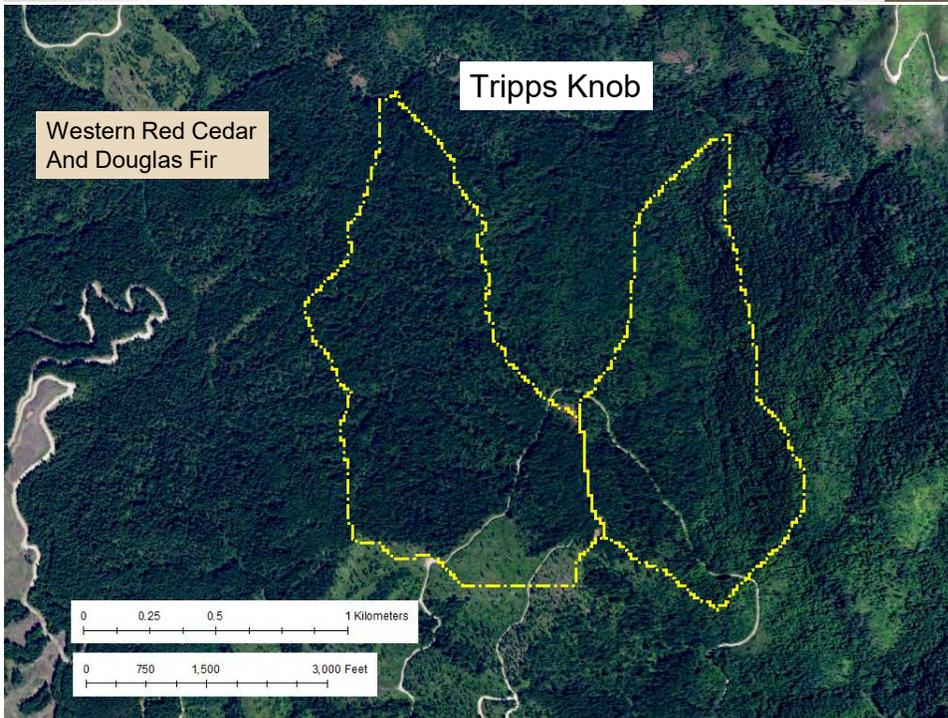
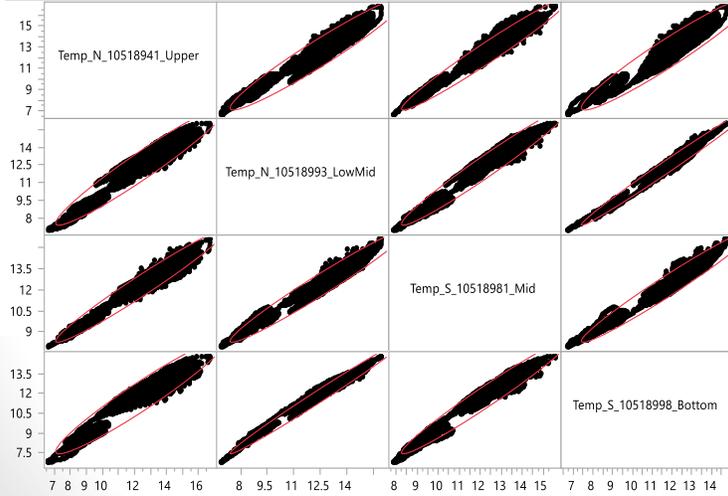


Tripps is the wettest of the three basins.

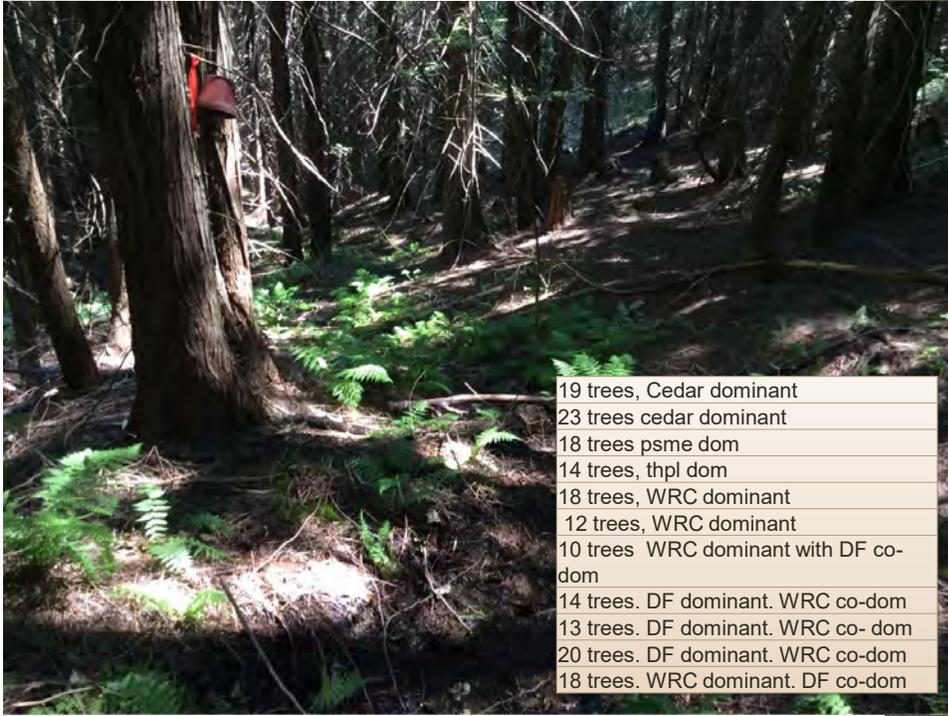

19 trees, Cedar dominant
23 trees cedar dominant
18 trees psme dom
14 trees, thpl dom
18 trees, WRC dominant
12 trees, WRC dominant
10 trees WRC dominant with DF co-dom
14 trees. DF dominant. WRC co-dom
13 trees. DF dominant. WRC co-dom
20 trees. DF dominant. WRC co-dom
18 trees. WRC dominant. DF co-dom

Trippe is dominated by cedar and Douglas fir.

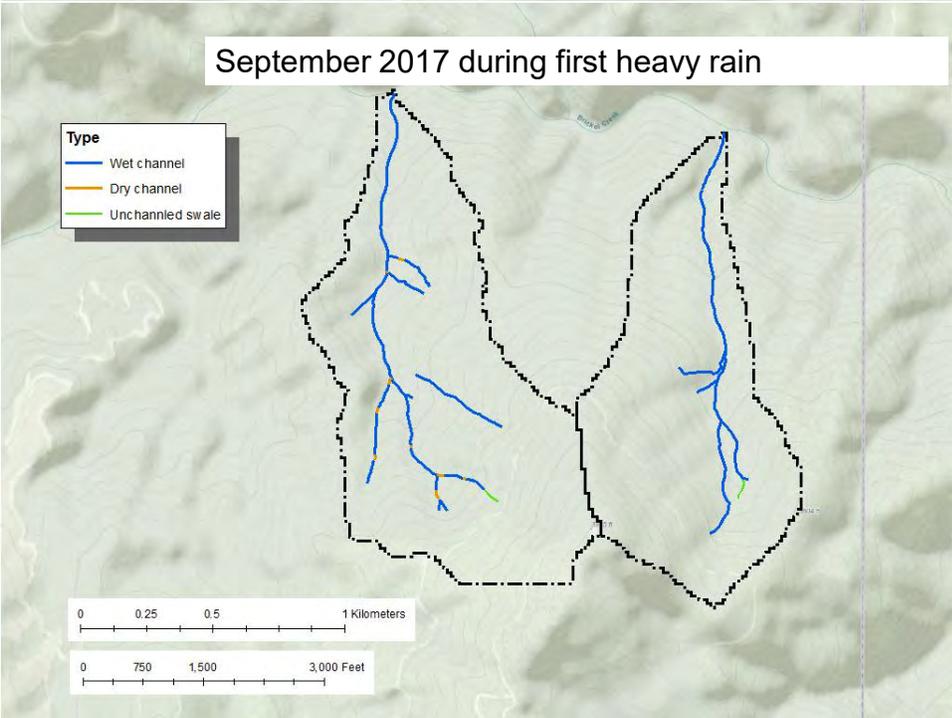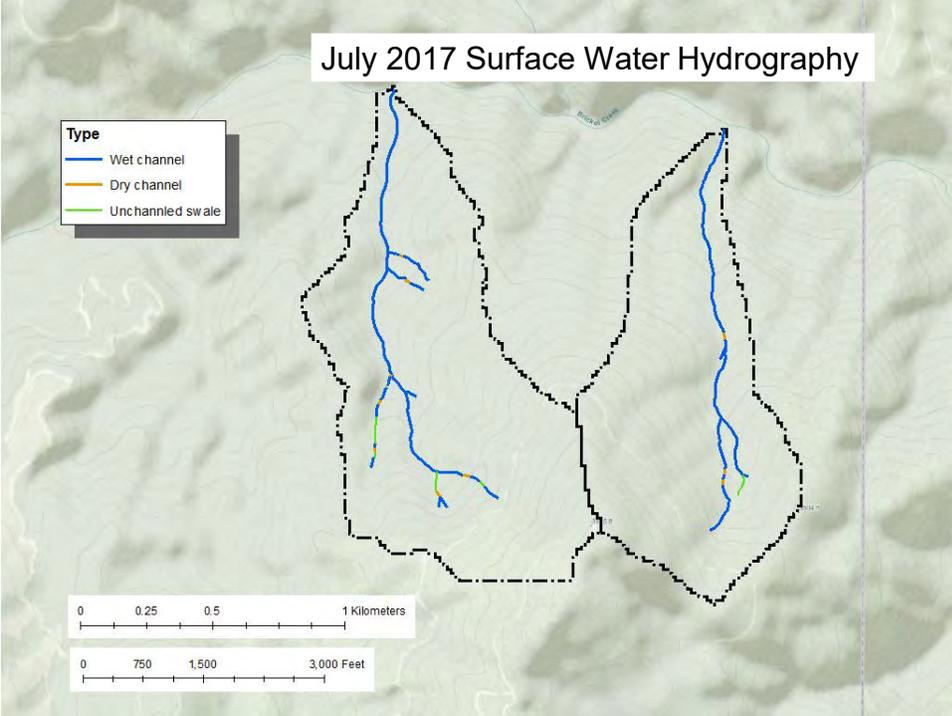


Tripps is a wet site.


July	Tripps_West		Tripps_East	
	Length (ft)	Proportion	Length (ft)	Proportion
DryChan	284	5%	135	3%
WetChan	5363	95%	3993	97%
Grand Total	5647		4128	

September	Tripps_West (Rain)		Tripps_East (Rain)	
	Length (ft)	Proportion	Length (ft)	Proportion
DryChan	419	6%	0	0%
WetChan	6187	94%	4327	100%
Grand Total	6606		4327	



Length is probably slightly underestimated because it only includes reaches mapped as either dry or wet in both surveys.

Tripps Knob Water Temperature, Top to Bottom

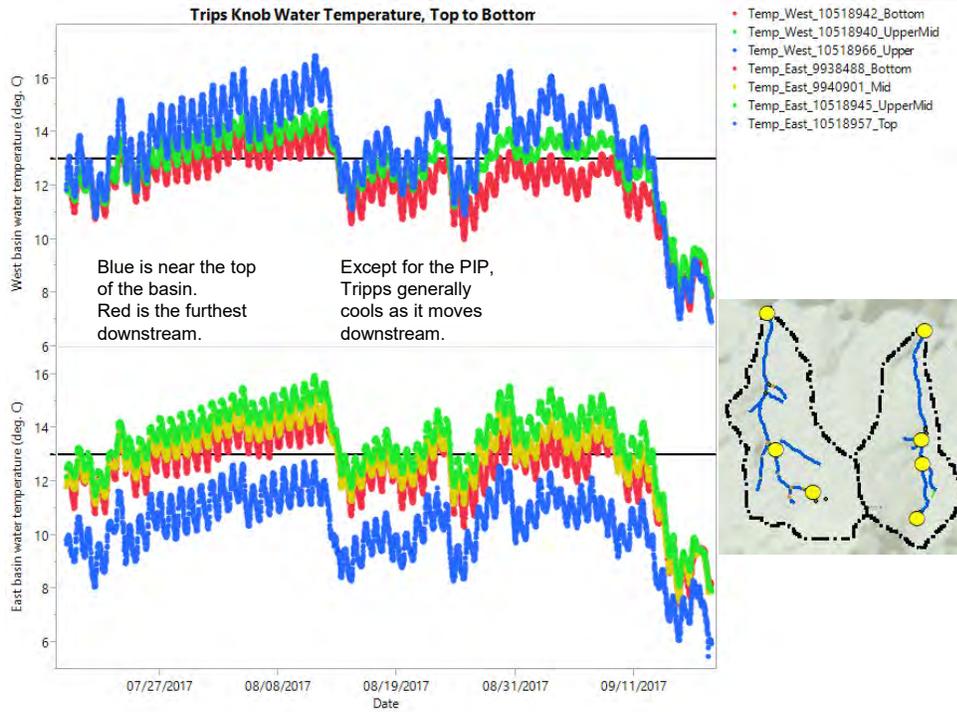

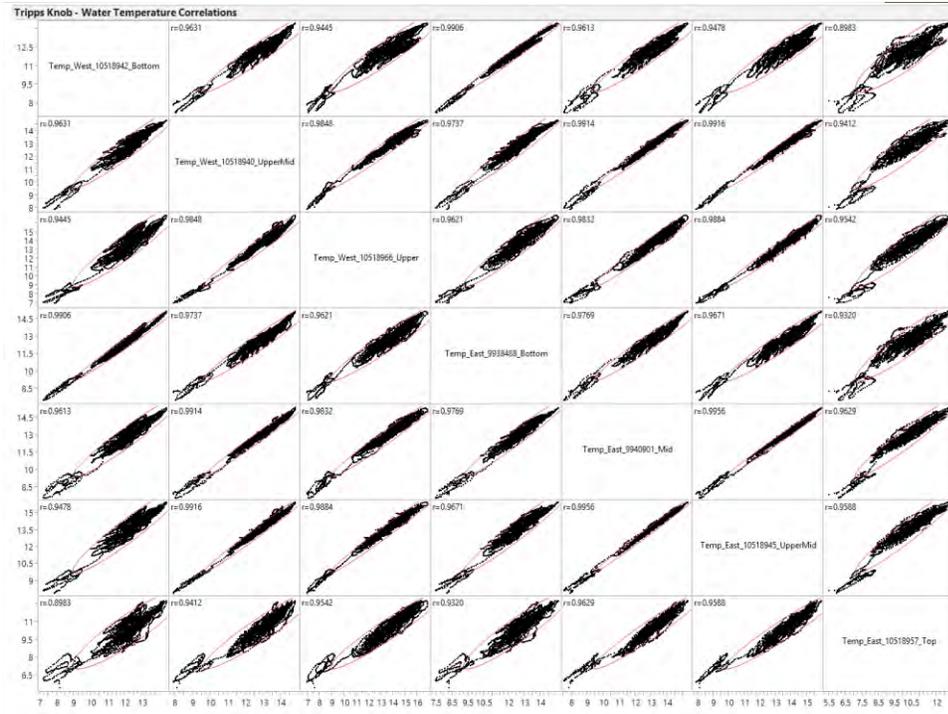


Again, the temperatures are correlated across and between basins.

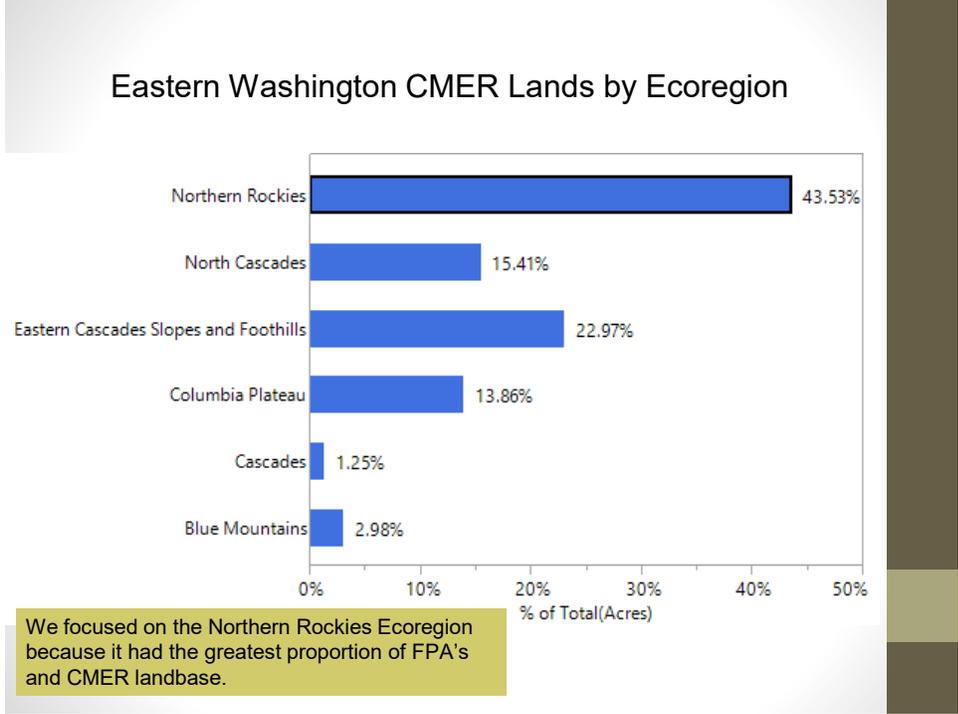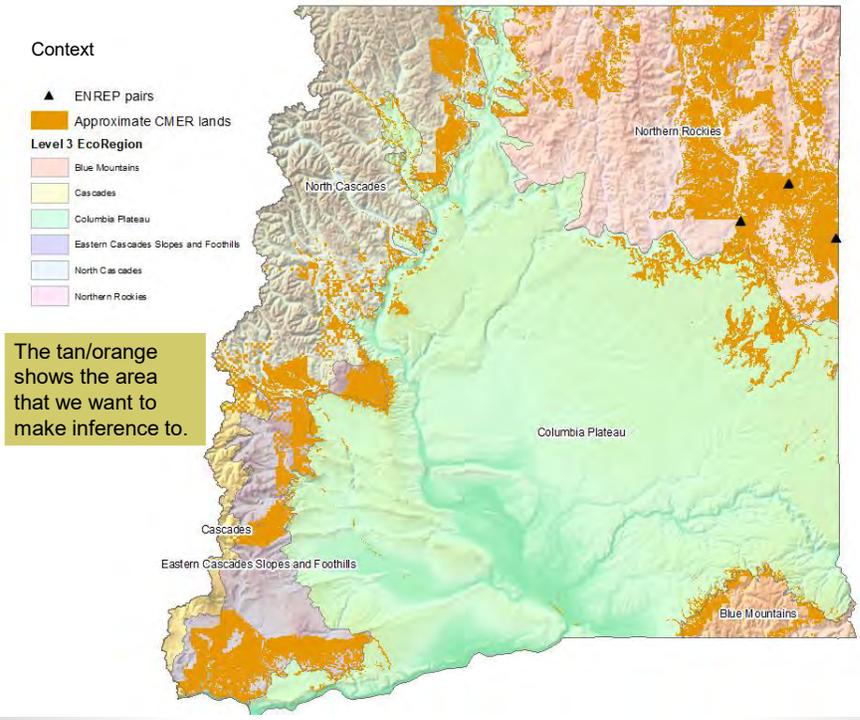


These graphs give some idea of the context of the sits we have relative to the areas we want to make inference. The top graph shows eastern Washington CMER lands and the lower graph shows the proportion of CMER land area by ecoregion.

Eastern Washington CMER Lands - Precipitation

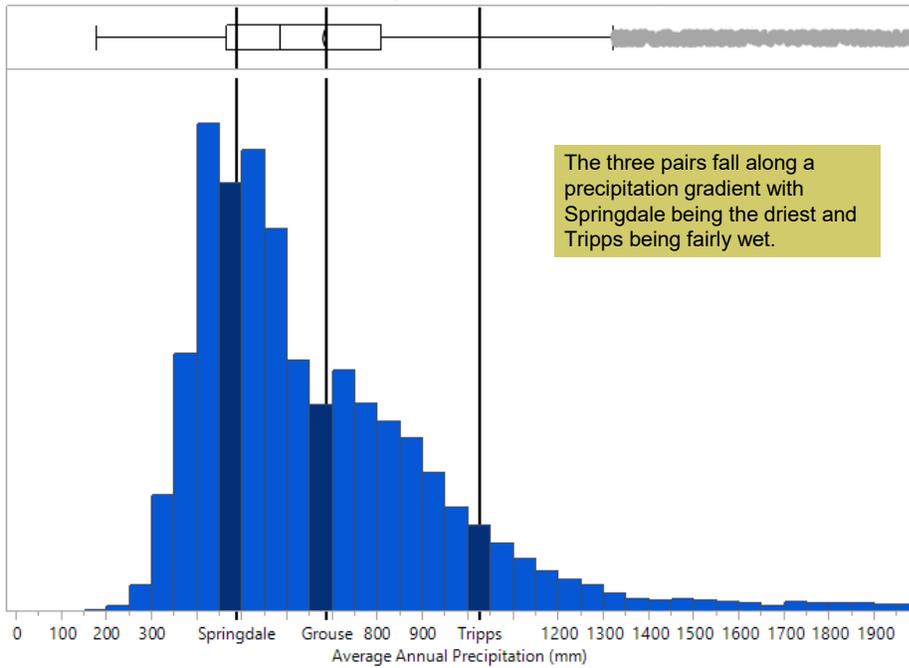


Eastern Washington CMER Lands - Maximum Temperature

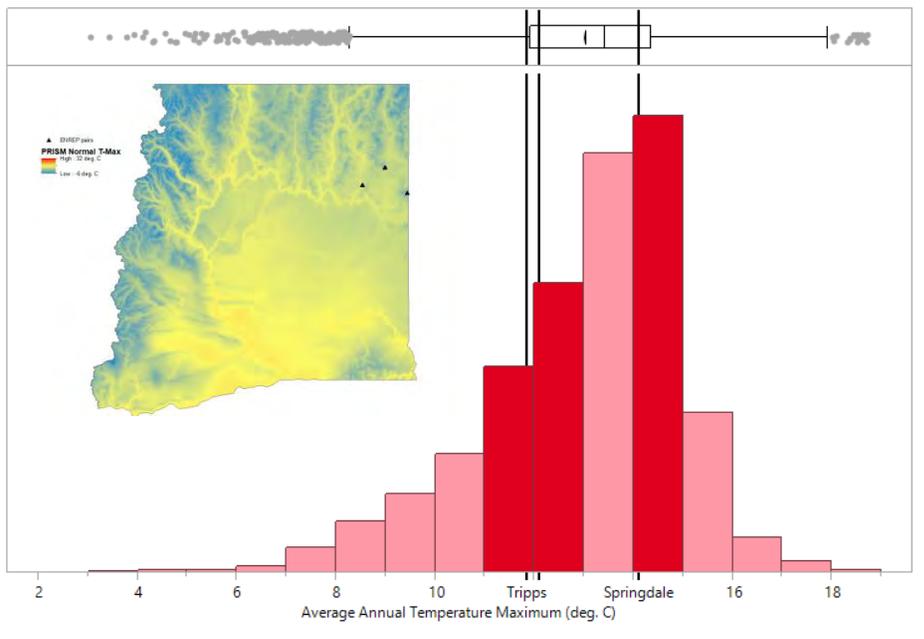


The top graph shows that the three sites span a gradient of precipitation. The next couple show that the sites are not outliers in terms of maximum or minimum annual temperature.

Eastern Washington CMER Lands - Minimum Temperature

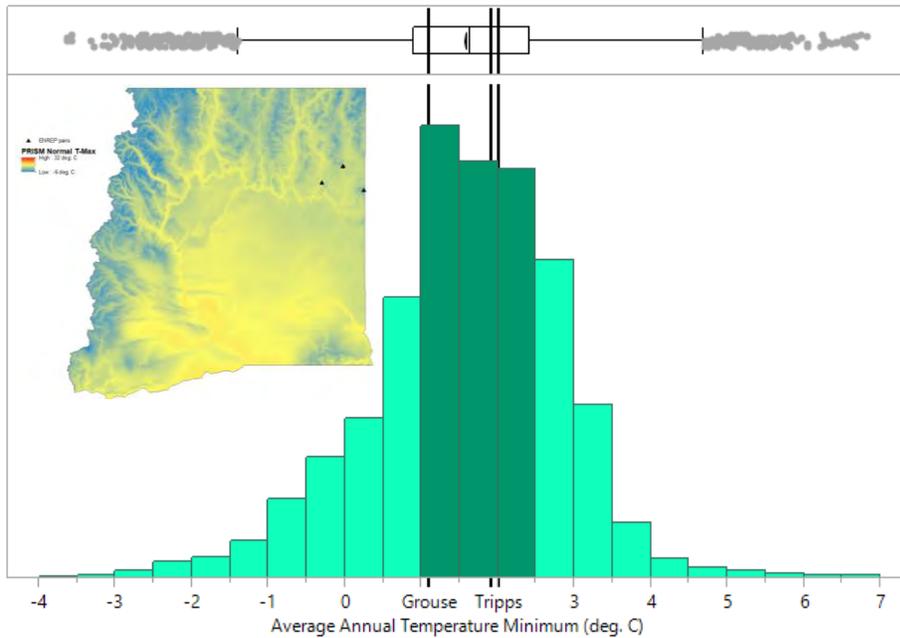

Tim suggested we use this recent Hydrologic Landscape Characterization to see where our sites fall.

LEIBOWITZ, COMELED, WIGINGTON, WEBER, SPROLES, AND SAWICZ (2016) Hydrologic Landscape Characterization

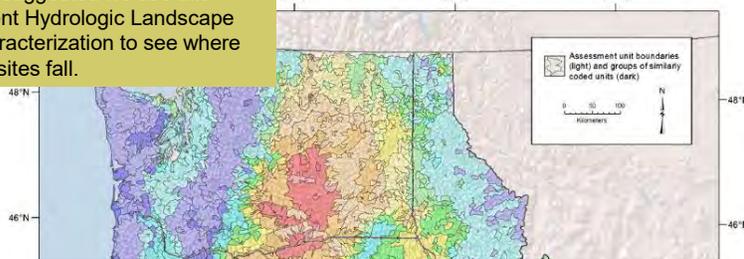

JOURNAL OF THE AMERICAN WATER RESOURCES ASSOCIATION
 AMERICAN WATER RESOURCES ASSOCIATION

April 2016


HYDROLOGIC LANDSCAPE CHARACTERIZATION FOR THE PACIFIC NORTHWEST, USA¹

Scott G. Leibowitz, Randy L. Comeleo, Parker J. Wigington, Jr., Marc H. Weber, Eric A. Sproles, and Keith A. Sawicz²

Use used a recent paper by Leibowitz et al. (2016) to look at how the three sites we have compare with the hydrologic landscape within CMER lands. We see that for most metrics, the sites are fairly representative.

Hydrologic Landscape Characterization

Here is the framework

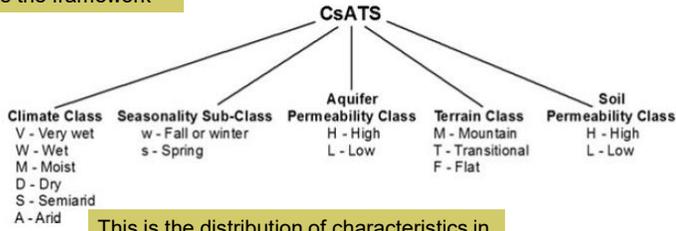


This is the distribution of characteristics in eastside CMER lands.



Site characteristics


Site	Climate
Tripps	Wet
Blue Grouse	Moist
Springdale	Dry

Hydrologic Landscape Characterization

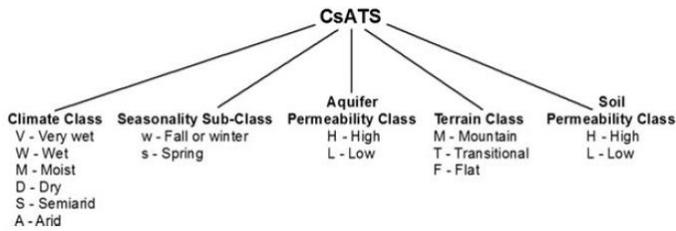

Site	Hydro Season
Springdale	Winter
Blue Grouse	Spring
Tripps	Spring

Hydrologic Landscape Characterization

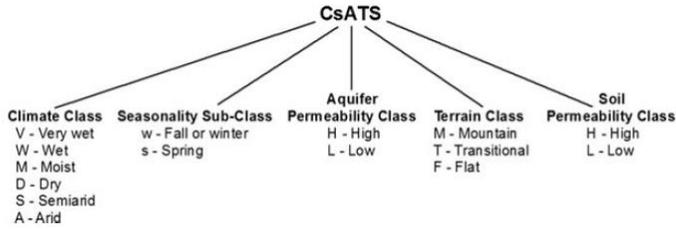


Site	Aquifer Perm.
Springdale	Low
Blue Grouse	Low
Tripps	Low

Eastern Washington CMER Lands
Aquifer Permeability by Ecoregion

Ecoregion	Aquifer Permeability	
	High	Low
Blue Mountains	3%	0%
Cascades	0%	1%
Columbia Plateau	8%	5%
Eastern Cascades Slopes and Foothills	22%	1%
North Cascades	1%	14%
Northern Rockies	6%	38%


The one place where the three existing sites were not representative was in terms of aquifer permeability. All three sites near Spokane are classified as having low aquifer permeability while 45% of eastside CMER lands have high aquifer permeability. To pick up sites with higher aquifer permeability we should look at the eastern Cascades slopes and foothills.

Hydrologic Landscape Characterization

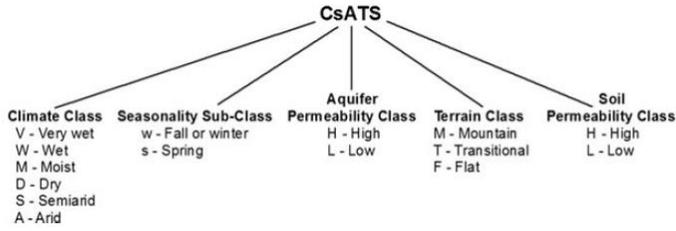

Site	Terrain
Springdale	Transitional
Blue Grouse	Mountain
Tripps	Mountain

Hydrologic Landscape Characterization

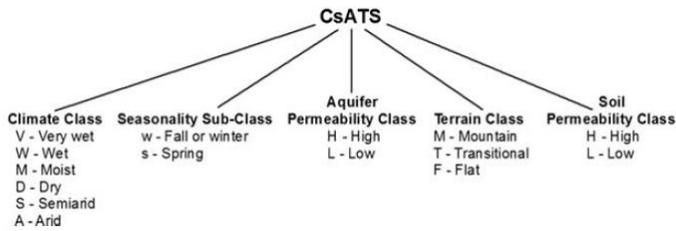

Site	Soil Perm.
Springdale	High
Blue Grouse	High
Tripps	High

Additional concerns

Harry Bell, Jenny Knoth, and Doug Martin, and Chris Mendoza each raised concerns regarding the ISPR approved study design or study design document. The March 23, 2018 meeting was intended to give the TWIG the opportunity to clarify for CMER members how the discussions between the ENREP team and ISPR reviewers transpired, and how those discussions affected the final study design. The purpose of this section is not to comprehensively document CMER member concerns, but rather to capture some of the TWIG perspectives that may not be captured in the text of the study design.¹

Changes made to the study design following the March 23, 2018 meeting

The following is a list of changes made to the study design in direct response to CMER comments received at, or in preparation for, the March 23 meeting:

- Title page: Version changed from ISPR to Final. Date updated with correct year.
- Replaced text in the abstract regarding potential for additional monitoring with text from the body of the document which states that “longer-term monitoring will be required to determine the overall trajectory of the response and to capture a broader range of climate conditions and greater potential for episodic changes with less frequent recurrence intervals.”
- Corrected performance target in Table 1.
- Replaced the clarifying language in Critical Question 3 with the text that was approved by Policy. The original critical question read: “What is the relationship between observed changes in resource condition and forest management activity?” During ISPR it was re-written to be more explicit. The revised text had read: “What is the relationship between aquatic life (and their supporting resources) and observed changes in hydrology, sediment, and temperature associated with forest management activity?”
- Added the Hard Rock reference (e.g., McIntyre *et al.* 2017) to the statement that although the degree of inference will be limited by the relatively short pre and post-treatment phases, this has been shown to be adequate for quantifying the initial changes associated with harvest.

Discharge as a confounding factor

Doug Martin questioned the ability of the study design to identify the mechanisms causing potential observed changes in temperature because he thought changes in shading would be confounded with changes in hydrology (discharge). He stated that he thought increased discharge would swamp or mask effects of stream buffers on shortwave radiation loading of the stream surfaces.

¹ This document was written on Sunday following a Friday meeting for distribution on Monday and is therefore not as complete as it otherwise might be.

As noted in the background section, forest management simultaneously influences a large number of processes and functions including watershed hydrology, extent and duration of surface water, stream thermal processes, wood and sediment dynamics, benthic invertebrates, and other aquatic life. It is the opinion of the TWIG, that the integrated watershed design is one of the study's strengths because it allows us to deconvolve relative contributions and interactions, if needed. In fact, integrating multiple processes was a design requirement from the project's inception as dictated by both CMER and Policy, which is why a variety of relevant internal watershed data (e.g. forest maturity, hydrometeorological gradients, stream shading, lateral and longitudinal extent and duration of surface water, channel morphology, surface and subsurface water temperature, sediment and sediment delivery pathways, large wood, functional small wood, and aquatic life) will be collected at multiple locations, rather than selected response variables at limited downstream locations. As for the concern that changes in discharge will overwhelm changes in temperature, the data do not support that hypothesis. Temperature changes were documented in all of the hard rock study sites despite overall annual increases in water yield. One reason that shade and discharge are not likely to have significant confounding effects on stream temperature is that the temporal dimensions of their changes are different. Discharge increases are most likely to occur during the winter and spring while temperature increases are most extreme during late summer (McIntyre *et al.* 2017). Moreover, reach-scale observations within and across basins will allow us to estimate the relative effects of changes in shade and discharge on stream temperatures.

Downstream Impacts

Multiple reviewers had questions about identifying potential effects of buffer treatments on reaches downstream of the study basins, and assessing their implications for fish. The TWIG acknowledges these concerns and had previously agreed to evaluate whether downstream impacts could defensibly be addressed given the sites available to this Type Np study. As discussed at the March 23, 2018 meeting, these sites are not appropriate for evaluating effects on fish and have limited utility for assessing even downstream effects on temperature given that the adjoining higher-order streams the study basins discharge to are influenced by land uses both upstream and immediately downstream of their confluences with the study streams.

However, the TWIG did agree to perform temperature monitoring in downstream connected F reaches (per the study plan), not to extend past the first downstream tributary junction.

Harvesting along dry reaches

One of the design goals of the 'dry' study was to evaluate the effect of buffering or not-buffering dry reaches. In all the sites where we have over 1000' of stream that is predominately dry for more than 2 months (e.g., Springdale, BlueGrouse, and their eastern Cascade analogs), we will be working with landowners to clearcut harvest a portion of the dry stream network. This was always a design goal for the 'dry' component of the study that was communicated to landowners of those sites, but not well articulated in the approved study design document.

We recognize that there was interest by certain members to also see clearcut harvest in perennially wet reaches, and this was discussed as an option in the March 23, 2018 meeting. At this meeting, TWIG members also brought up that having a large number of clearcut reaches would weaken our ability to relate shade-loss to temperature change across less pronounced differences in shade and thus and make inferences regarding the effects of different buffering practices. Clearcut harvest along perennially wet reaches has not been discussed with the landowners, and the decision on where and how perennial reaches are treated will need to be resolved at a later date with the involvement of landowners and their harvest implementation teams to ensure that experimental treatments both meet their management objectives and are practically feasible.

ISPR concerns and how they were addressed

Most of ISPR's concerns were addressed directly through the comment matrix and text changes, but a few of their comments and our responses were resolved or changed during the January 3, 2018 conference call with ISPR.

On March 23, 2018, one or more reviewers asked for clarification regarding how some of these comments were resolved. Explanations to some of these were provided at the meeting, but they are captured here as part of the record. The bullet points are concerns raised by ISPR that were addressed through text changes or conversation.

- **The specific objectives and metrics to be generated in the cross-sectional survey methods are unclear and warrant further explication.**

ISPR wanted to know why we were surveying channel cross-sections and they wanted more detail in the methods. We explained that the cross-sections were to show channel aggradation/degradation and migration, and we updated the description of both the goal and methods under Sampling Scheme and Field measurements.

- **The methodological and design basis for assessing impact of Type N stream responses on adjoining type F waters is unclear, and certain to be complicated enough that it justifies more rigorous treatment if it is to be included in the study.**

This conversation was similar to the one that occurred during the March 23, 2018 CMER meeting. We explained that given these site conditions it would be hard to make any inference regarding effects on downstream fish and that inferences regarding even temperature were likely to be problematic once an upstream or downstream tributary is reached.

- **We are uncertain that the proposed frequency pairing framework for evaluating flow changes is statistically appropriate for low flow comparisons, especially where low flow variation is large and qualitative change from low flow to no flow, or the reverse, are likely. This should be resolved, considering that biota, and probably water quality, are likely strongly controlled by low flow dynamics in these systems.**

We agreed to drop the frequency pairing language from the study design. We can always use the technique later if it makes sense, but we concluded this level of detail was not needed in the proposal.

- **"I also question whether MBACI is the best design to attack the study goals and objectives, given the complexity of watershed-stream responses, and often high variability." "As NC rightly points out here, the BACI affords no firm inferential basis for interpreting cause and effect, especially when outcomes are highly variable." "careful site pairing to minimize uncontrolled variation is crucial if MBACI is to be successfully implemented and not wholly confounded by variations not affected by the riparian logging treatments."**

During the discussion that occurred with the ISRP on January 3, 2018, it became clear that they wanted to know why we had not considered also employing physics-based models (e.g., DHSVM) to help discern cause and effect relationships. With physics-based models, one can explore the sensitivity of variables of interest to forcing data and parameterizations. In this sense, models can be used in conjunction with empirical data to both explore direct mechanistic relationship sensitivities and assess a broader range of biophysical conditions with virtual watershed experiments in numerical simulations. We explained that we had run that alternative past Policy but that Policy wanted the study to be empirically-based. As soon as we focused on empirical research, their previous concerns were dropped and ISPR came to the conclusion that an observational BACI study with supporting internal watershed data was appropriate despite the challenges required to infer cause and effect relationships in this experimental framework.

- **"Describe what power represents in the context of MBACI and how is going to be interpreted, given the potentially large number of site pairings. Explain why the proposed statistical methods are best suited to discriminate cause and effect. They may be able to detect the change, but given the complexity of the systems, it is not clear how the main cause of the change is going to be identified" "How is data interpreted as a function of general precipitation and temperature patterns? The connection between streamflow and changes in stream temperature is missing from the statistical tests."**

Again, in this case, the ISPR reviewer's perspective was whether inclusion of a physically-based model, rather than the collection and analysis of empirical data, would be the most effective approach to discern cause and effect relationships. We discussed the merits of physically-based models as well as some of the challenges in having model output accepted in the adaptive management context for making decisions regarding policy. In the end, the questions were less about the power of MBACI and more about the relative strengths and weaknesses of empirical, modeling, and hybrid approaches. Again, given the objective of this study is to inform policy decisions, the ISRP ultimately agreed that the study design was acceptable to meet both the scientific and policy objectives of assessing the effectiveness of management practices on non fish-bearing streams.

